

Utile 32 in. Composite Direct-to-Stud Side Wall

Model number:	103419-312-505-000
---------------	--------------------

Dimensions: 32.5" x 1.125" x 80.125" Installation: Direct-to-Stud Material: Composite



MADE IN CANADA 

Standard Features:

- This side wall can be combined with a back wall and another side wall to create an alcove shower installation or simply combined with another side wall for a corner show...
- Installs easily in just 1 day versus 3 days for standard ceramic tile
- Mistake-proof Ulok installation system allows you to perfectly align the panels, slip them together and lock them into place
- No tile or grout protective sealer required
- Solid, 1-piece wall panel: sturdy and durable allows for installation of grab bars and other accessories

Product characteristics:

- Direct-to-Stud Installation
- DIY Product
- Award Winner

Code Compliant:

CSA

Certifications

MAAX products adhere to one or more of the following certifications:



MAAX

Utile 32 in. Composite Direct-to-Stud Side Wall

Model number:

103419-312-505-000

Dimensions: 32.5" x 1.125" x 80.125"

Installation: Direct-to-Stud


Material: Composite

Dimensions


32 1/2 x 1 1/4 x 80 1/4 In.
(826 x 29 x 2035 mm)

Weight

38 lbs - 17 kg

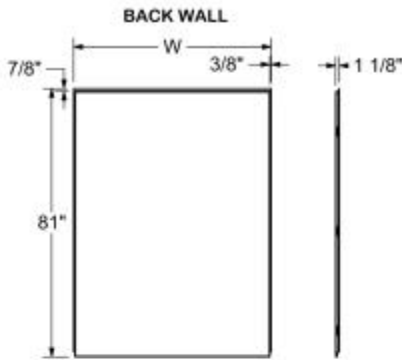



Code	Description	W (in.)
103416	Utile 36 in. back wall	35 1/4
103421	Utile 48 in. Back wall	47 5/8
103422	Utile 60 in. Back wall	59 5/8

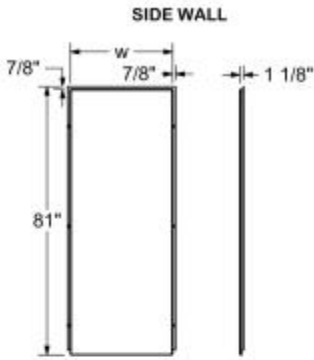

Code	Description	W (in.)
103419	Utile 32 in. side wall	32 1/2
103415	Utile 36 in. side wall	36 1/4

TOP VIEW (ASSEMBLED)

Configuration	W (in.)	L alcove (in.)	L corner (in.)	D (in.)	d (in.)
Utile 3636	35 7/8	33 1/2	N/A	36 1/2	34 1/2
Utile 4832	47 3/4	45 1/2	46 1/4	32 3/4	30 3/4
Utile 4836	47 3/4	45 1/2	46 1/4	36 1/2	34 1/2
Utile 6032	59 3/4	57 1/2	58 1/8	32 3/4	30 3/4
Utile 6036	59 3/4	57 1/2	58 1/8	36 1/2	34 1/2



This product is designed to be installed in a building that conforms with the requirements of the National Building Code of Canada 2005
All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Project: _____

Contractor: _____

Representative: _____

Date: _____

Tel: _____

Notes: _____

