


Incognito 57 56-59 x 56 3/4 in. 6mm Bypass Tub Door for Alcove Installation

Model number:	139351-900-084-000
---------------	--------------------

Dimensions:	59" x 59" x 56.75"	Installation:	Alcove	Material:	Tempered Glass
-------------	--------------------	---------------	--------	-----------	----------------

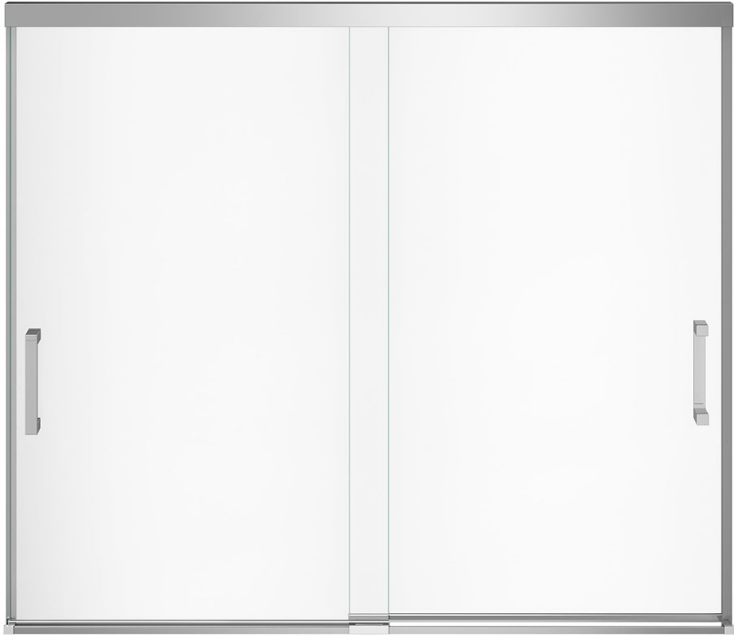

Standard Features:

- 6mm tempered glass provides durability and safety
- Frame finish available in brushed nickel, chrome, dark bronze and matte black color to complement any bathroom decor
- Semi-frameless bypass tub door for alcove installation
- Easy, and intuitive parts on parts installation with up to 1/2 in. out of plumb adjustment

- The door catches prevents the doors from opening unwantedly, which enhances product watertight seal

Product characteristics:

- Available in Multiple Finishes
- DIY Product
- Bypass Door

Certifications
MAAX products adhere to one or more of the following certifications:

Frame Finish(es):


Brushed Nickel


Chrome


Dark Bronze


Matte Black



Glass Pattern(s):


Clear



Incognito 57 56-59 x 56 3/4 in. 6mm Bypass Tub Door for Alcove Inst:

Model number:


139351-900-084-000

Dimensions: 59" x 59" x 56.75"

Installation: Alcove

Material: Tempered Glass

STANDARD

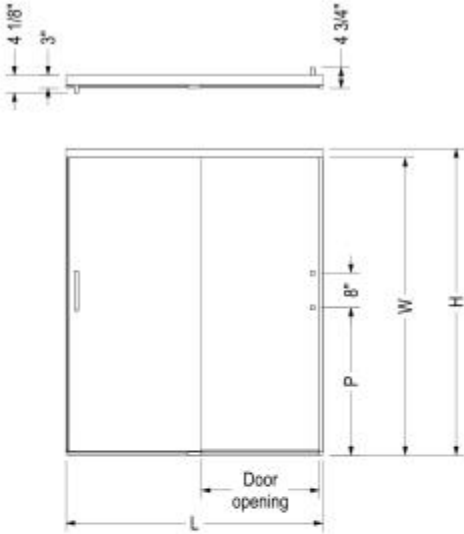

Dimensions

59 x 59 x 56 3/4 In.
(1499 x 1499 x 1441 mm)

Weight

80 lbs - 36 kg

Code	Description	H	W	L Adjustable	Door Opening	P	Wall adjustment
139349	Incognito 6mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139350	Incognito 6mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139351	Incognito 6mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"
139352	Incognito 8mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139353	Incognito 8mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139354	Incognito 8mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Project: _____

Contractor: _____

Representative: _____

Date: _____

Tel: _____

Notes: _____

MAAX