

Location: _____




R150

**CAST IRON COMBINED ROOF DRAIN WITH
CAST IRON DOMES AND OVERFLOW STANDPIPE**

Specification: MIFAB® Series R150 combined roof drain and secondary overflow system, consisting of one piece lacquered cast iron drain body with integral sump receiver, cast iron waterproofing membrane clamp rings with integral gravel stops, one 2 1/2" (64) high fixed integral cast iron overflow standpipe and two self-locking cast iron dome strainers with a free area of 43 square inches each.

Function: Used in any type of conventional or flat roofs where a safety overflow, which receives water only when the accumulation is greater than the height of the standpipe is required to be located beside a standard roof drain. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

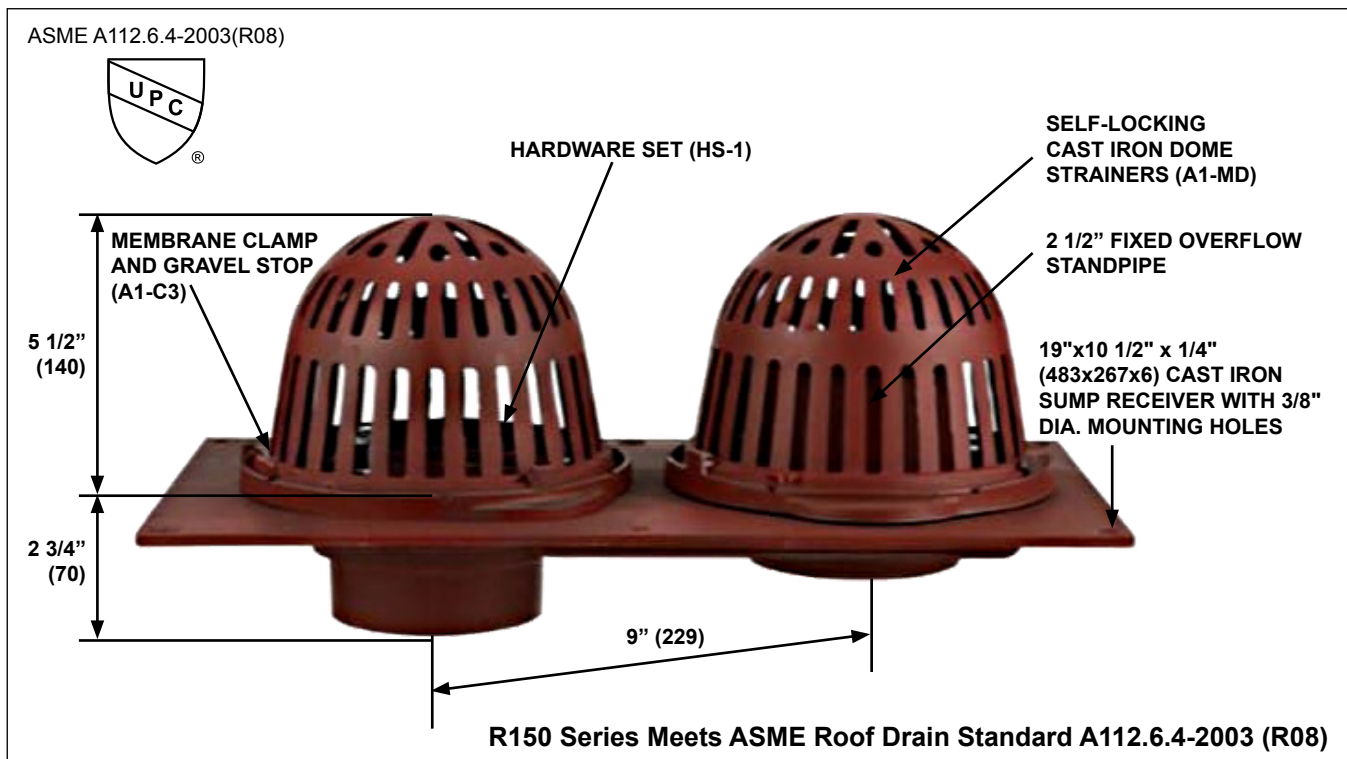

MODEL NO.	OUTLET SIZE	OUTLET TYPE	BODY HEIGHT
R152	2" NH	No Hub	2 3/4" (70)
R153	3" NH	No Hub	2 3/4" (70)
R154	4" NH	No Hub	2 3/4" (70)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____