



**McGuire Manufacturing Co., Inc.**

60 Grandview Court  
P.O. Box 746 • Cheshire, CT 06410  
203-699-1801 • Fax: 203-699-1813  
www.mcguiremfg.com

## PRODUCT SPECIFICATION

### Part No.


LFST11, LFST11LK, LFST11X, LFST12,  
LFST12LK, LFST12X, LFST13, LFST13LK,  
LFST13X, LFST14, LFST14LK, LFST14X

**Straight Supply Stop  
I.P.S. x O.D.**

**Job Name:**

**Submittal Number:**

## Pipe To Compression

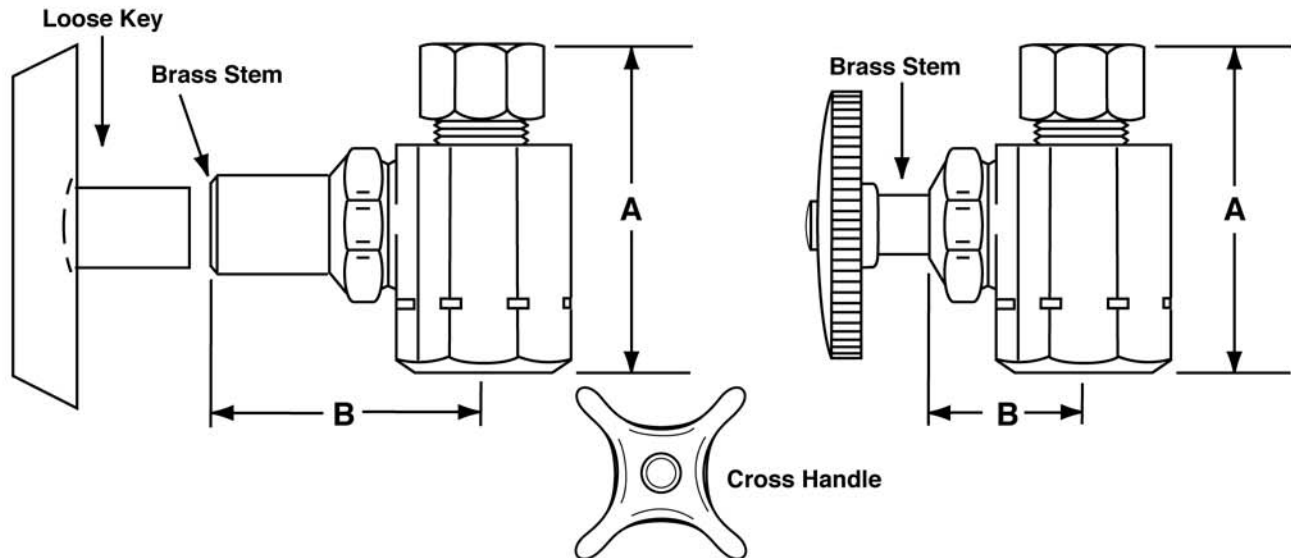

| NO.      | DESCRIPTION             | ROUGHING MEASUREMENTS |        |
|----------|-------------------------|-----------------------|--------|
|          |                         | A                     | B      |
| LFST11   | 3/8" I.P.S. x 3/8" O.D. | 1-15/16"              | 7/8"   |
| LFST11LK | 3/8" I.P.S. x 3/8" O.D. | 1-15/16"              | 1-5/8" |
| LFST11X  | 3/8" I.P.S. x 3/8" O.D. | 1-15/16"              | 7/8"   |
| LFST12   | 1/2" I.P.S. x 3/8" O.D. | 1-15/16"              | 7/8"   |
| LFST12LK | 1/2" I.P.S. x 3/8" O.D. | 1-15/16"              | 1-5/8" |
| LFST12X  | 1/2" I.P.S. x 3/8" O.D. | 1-15/16"              | 7/8"   |
| LFST13   | 3/8" I.P.S. x 1/2" O.D. | 1-15/16"              | 7/8"   |
| LFST13LK | 3/8" I.P.S. x 1/2" O.D. | 1-15/16"              | 1-5/8" |
| LFST13X  | 3/8" I.P.S. x 1/2" O.D. | 1-15/16"              | 7/8"   |
| LFST14   | 1/2" I.P.S. x 1/2" O.D. | 1-15/16"              | 7/8"   |
| LFST14LK | 1/2" I.P.S. x 1/2" O.D. | 1-15/16"              | 1-5/8" |
| LFST14X  | 1/2" I.P.S. x 1/2" O.D. | 1-15/16"              | 7/8"   |

**LK** designates *Loose Key*

**X** designates *Heavy Brass Cross Handle*

See options and accessories section for details on product variations.



ASME A112.18.1-2011

## Specifications:

Chrome plated brass, Supply Stop Valve with full turn brass stem. Inlet shall be (3/8, 1/2) inch (IPS, sweat, compression). Outlet shall be (3/8, 1/2) inch (IPS, compression). Supply stop valve shall be McGuire\_\_\_\_\_. Supply stop valve shall be certified by CSA or other recognized testing authority and bear manufacturer and testing mark. Stop to be certified to 200 psi line pressure.