

Feature

600# WOG (non-shock)
Lead free brass construction
¼ turn operation
Adjustable packing
Blow-out proof stem
Integral hose end drain/purge valve
FNPT x EzPress ends
Integral relief valve port
AB1953, NSF/ANSI 61 & 372 certified




3431AB: Hot valve operation (red handle)
3432AB: Cold valve operation (blue handle)



Material

	Part	Material	Specification
1	Body	Lead Free Brass	C28000
2	Ball	Lead Free Brass / Cr plated	C28000
3	Seat	PTFE	PTFE
4	Fixed end	DZR Lead Free Brass	C27453
5	Stem	Lead Free Brass	C28000
6	Packing ring	PTFE	PTFE
7	Packing nut	Brass	C37700
8	T-handle	Aluminum	ASTM B85
9	Valve info	-	-
10	Handle nut	Steel /Zn plated	ASTM A36
11	Ball	Lead Free Brass / Cr plated	C28000
12	Seat	PTFE	PTFE
13	Fixed end	Lead Free Brass	C28000
14	Drain gasket	EPDM Perox	NSF approved
15	Drain cap	Brass	C37700
16	Cap retainer	Rubber	-
17	Stem	Lead Free Brass	C28000
18	L-handle	Aluminum	ASTM B85
19	Handle screw	Steel /Zn plated	ASTM A36
20	O-ring	EPDM Perox	NSF approved
21	Union	Lead Free Brass	C28000
22	Union nut	Brass	C37700
23	O-ring	EPDM Perox	NSF approved

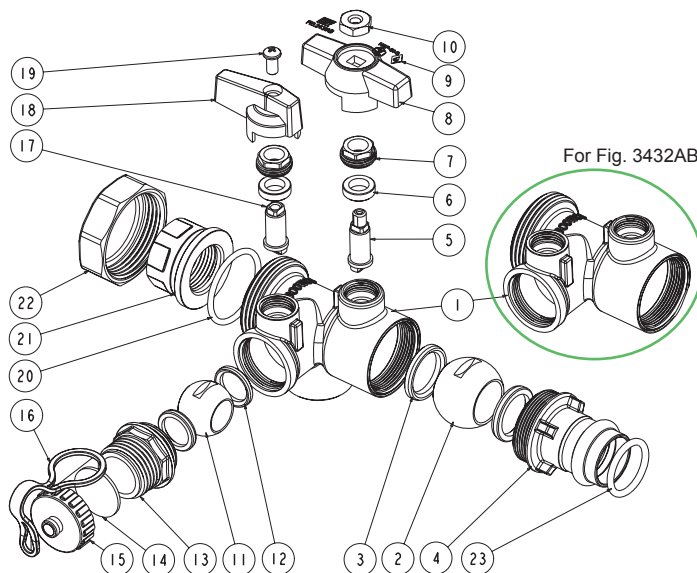

Dimension, Weight

Size	H1 [in]	H2 [in]	H3 [in]	L1 [in]	L2 [in]	L3 [in]	D1 [in]	D2 [in]	D3 [in]	D4 [in]	Wt.* [lb]
¾"	1.56	1.10	2.66	2.09	3.09	5.08	2.17	0.79	0.91	0.71	1.83/1.72

* 3431AB / 3432AB

