



Flanged Concentric Reducer (Class 125 Standard)

Fig. 825

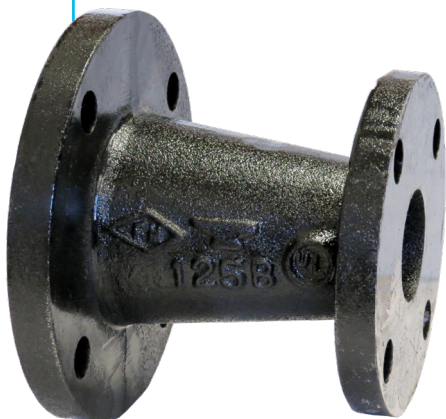

All standard or “class 125” cast iron flanged fittings are manufactured to ASME specifications and are marked 125 for pipe sizes 12 NPS (300 DN) and smaller; and have plain faces. Unless otherwise specified, cast iron flanged fittings are drilled and faced in accordance with ASME B16.1.

Cast iron flanged fittings are available in both black painted and galvanized.

For Listings/Approval Details and Limitations, visit our website at www.asc-es.com or contact an ASC Engineered Solutions™ Representative.

See following page for standards and specifications.

Cast Iron Flanged Fittings and Cast Iron Flanges

Pressure*			Pressure*		
Temperature	Class 125	Class 250	Temperature	Class 125	Class 250
	1"–12"	1"–12"		1"–12"	1"–12"
°F/°C	PSI/bar	PSI/bar	°F/°C	PSI/bar	PSI/bar
-20°–150°	200	500	325°	155	355
-28.9°–65.6°	13.8	34.5	162.8°	10.7	24.5
200°	190	460	350°	150	335
93.3°	13.1	31.7	178.3°	10.3	23.1
225°	180	440	375°	145	315
107.2°	12.4	30.3	190.6°	10.0	21.7
250°	175	415	400°	140	290
121.1°	12.1	28.6	207.8°	9.7	20.0
275°	170	395	425°	130	270
135.0°	11.7	27.2	218.3°	9.0	18.6
300°	165	375	450°	125	250
148.9°	11.4	25.9	232.2°	8.6	17.2

Note:

*Applies to fittings and flanges manufactured with ASTM A126 Class B material only.



PROJECT INFORMATION	APPROVAL STAMP
Project:	☐ Approved
Address:	☐ Approved as noted
Contractor:	☐ Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	

Flanged Concentric Reducer (Class 125 Standard) Fig. 825



Standards and Specifications

Cast Iron Flanges and Flanged Fittings (Class 125 Standard and Class 250 Extra Heavy)

	Dimensions	Material	Galvanizing**	Thread	Pressure Rating
Class 125 (1"–12")	ASME B16.1	ASTM A126 (A) or (B)	ASTM A153	ASME B1.20.1	ASME B16.1
Class 250 (1"–12")	ASME B16.1	ASTM A126 (A) or (B)	ASTM A153	ASME B1.20.1	ASME B16.1

Note:

** ASTM B633. Type I, SC 4, may be supplied as alternate zinc coating per applicable ASME B16 product standard.

Specifications

All Cast Iron Flanged Fittings and Flanges in sizes listed are made to ASME and are marked 125 or 250 for pipe sizes 12 NPS (300 DN) and smaller. Unless otherwise specified, cast iron flanges and fittings are drilled and faced in accordance with ASME B 16.1.

Coatings

Flanged fittings and flanges are available in both black painted and galvanized. Consult an ASC Engineered Solutions Representative™ for available sizes.

Sizes

Size of all flanged fittings and flanges scheduled indicates nominal pipe diameter of ports. Standard reducing elbows carry the same dimensions center-to-face as regular elbows of largest straight size.

Ordering

To order reducing companion flanges, specify threaded or reduced size first, then the outside diameter of flange wanted. For instance, if a reducing flange is required to connect a 5-inch pipe to an 8-inch flanged valve or fitting having a 13 1/2 inch O.D. flange, order: 5 x 13 1/2 inch standard reducing flange.

Dimensions

Bolt holes for bolts smaller than 1 3/4 inches (44mm) in diameter are drilled 1/8 inch larger than the bolt diameter; 1 3/4 inch (44mm) and larger bolts have holes drilled 1/4 inch (6mm) larger than bolt diameter. Bolt holes straddle the center line. Bolt holes are spot faced on order only.

Tolerances


An inspection limit of plus or minus 1/32 inch (1mm) shall be allowed on all center to contact surface dimensions for sizes up to and including 10 NPS (250 DN); plus or minus 1/16 inch (1.5mm) on sizes larger than 10 NPS (250 DN). Inspection limit of plus or minus 1/16 inch (1.5mm) shall be allowed on all contact surface to contact surface dimensions for sizes up to and including 10 NPS (250 DN); plus or minus 1/8 inch (3mm) on sizes larger than 10 NPS (250 DN). The largest opening in the fitting governs the tolerance to be applied to all openings.



asc-es.com

Building connections that last™

Flanged Concentric Reducer (Class 125 Standard) Fig. 825

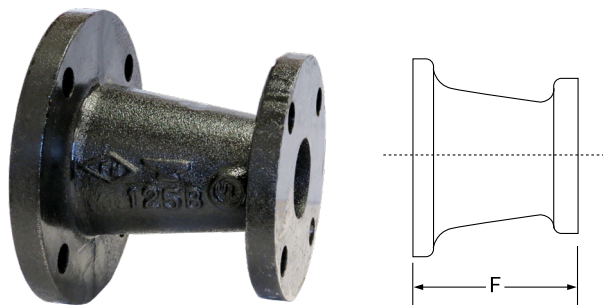

Size		F	Unit Weight		Size	F	Unit Weight	
			Black	Galvanized			Black	Galvanized
NPS/DN	NPS/DN	In./mm	Lbs./kg	Lbs./kg	NPS/DN	In./mm	Lbs./kg	Lbs./kg
2 50	1½ 40	5 127	12.00 5.44	— —	6 150	2½ 65	37.00 16.78	— —
2½ 65	1½ 40	5½ 127	12.00 5.44	— —		3 80	39.00 17.69	— —
	2 50		14.00 6.35	— —		4 100	47.00 21.32	47.00 21.32
3 80	1½ 40	6 152	14.00 6.35	— —		5 125	50.00 22.68	— —
	2 50		16.00 7.26	— —	8 200	4 100	66.00 29.93	— —
	2½ 65		19.00 8.62	19.00 8.62		5 125	71.00 32.20	— —
4 100	2 50	7 178	24.00 10.88	24.00 10.88		6 150	77.00 34.92	77.00 34.92
	2½ 65		26.00 11.79	— —	10 250	6 150	100.00 45.35	— —
	3 80		28.00 12.70	28.00 12.70		8 200	120.00 54.42	— —
5 125	3 80	8 203	32.00 14.51	— —		6 150	140.00 63.49	— —
	4 100		39.00 17.69	— —	12 300	8 200	155.00 70.29	— —
6 150	2 50	9 229	34.00 15.42	— —		10 250	180.00 81.63	— —

Note:

See first page for pressure-temperature ratings.



asc-es.com

Building connections that last™