

Fig. CT-69

Adjustable Swivel Ring

Size Range: 1/2" through 4"
Material: Carbon steel
Finish: Copper plated
Service: Recommended for suspension of non-insulated **stationary** copper tube.
Approvals: Complies with Federal Specification A-A-1192A (Type 10) WW-H-171-E (Type 10), ANSI/MSS SP-69 and MSS SP-58 (Type 10).
Features:

- Threads are countersunk so that they cannot become burred or damaged.
- Knurled swivel nut provides vertical adjustment after piping is in place.
- Captured swivel nut will not fall off.

Ordering: Specify nominal tube size, figure number, name and finish.
Note: Metric nut available upon request.

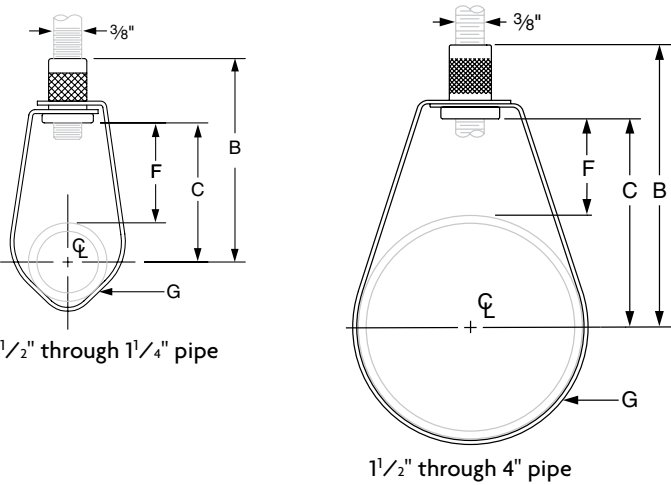


FIG. CT-69: DIMENSIONS (IN) • LOADS (LBS) • WEIGHT (LBS)						
Tube Size	Max Load	Weight	B	C	F	G Width
1/2	300	0.10	3	2 3/16	1 7/8	5/8
3/4		0.10	2 13/16	2	1 9/16	
1		0.10	2 11/16	1 13/16	1 1/4	
1 1/4		0.10	2 1/2	1 5/8	1 5/16	
1 1/2		0.10	2 1/16	1 13/16	1	
2	525	0.11	3 7/16	2 1/2	1 1/2	3/4
2 1/2		0.25	3 13/16	2 15/16	1 11/16	
3		0.27	4 1/4	3 3/8	1 7/8	
4		0.48	4 3/8	3 1/2	1 1/2	

Note: Reflects changes in rod diameter from previously published data per recent revisions in MSS-SP-58 & 69

PROJECT INFORMATION		APPROVAL STAMP	
Project:		☐ Approved	
Address:		☐ Approved as noted	
Contractor:		☐ Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			