

data sheet

77V series

press end forged ball valve ½" - 2"



features

- 2-piece, heavy pattern forged design
- full port flow
- superior RPTFE seats and packing
- adjustable stem packing
- Leak Before Press® technology
- blowout-proof stem
- corrosion resistant materials
- silicone free assembly
- 100% factory tested
- manufactured in the USA - BAA and BABA compliant

description

The "Apollo" Press® 77V series 2-piece press ball valve is ideal for installation in heating, cooling and non-potable plumbing applications. Features Leak Before Press® technology and 300 psig maximum working pressure. Proudly manufactured in our South Carolina facilities.

size range

- ½" - 2"

connections

- press

configurations

- 77V series - standard
- 77VLF series - lead-free

approvals

- MSS SP-110 ball valves
- IAPMO/ANSI Z1157 ball valves
- IAPMO/ANSI/CAN Z1117
- Buy American Act (BAA)
- Build America Buy America (BABA) Ac5

approved applications

- water, chilled and hot: 33°F - 250°F
- hydronic heating (90% glycol max)
- low pressure steam, 15 psig max
- not suitable for flammable gas service
- not intended for potable water in USA



this specification is provided for reference only. we reserve the right to change any portion of this specification without notice and without incurring obligation to make such changes to Aalberts integrated piping systems products previously or subsequently sold.

Aalberts integrated piping systems

10715 Sikes Place / suite 200 / Charlotte / NC / 28277

aalberts-ips.us

job name

job location

engineer

contractor

tag

PO#

rep


wholesaler dist

performance rating

CWP	temperature
300 psig (maximum)	0°F - 250°F (maximum temperature)

** "Apollo" Press® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition, and soft copper tube up to 1 ¼" CTS. Not suitable for steam or flammable gas service.

data sheet

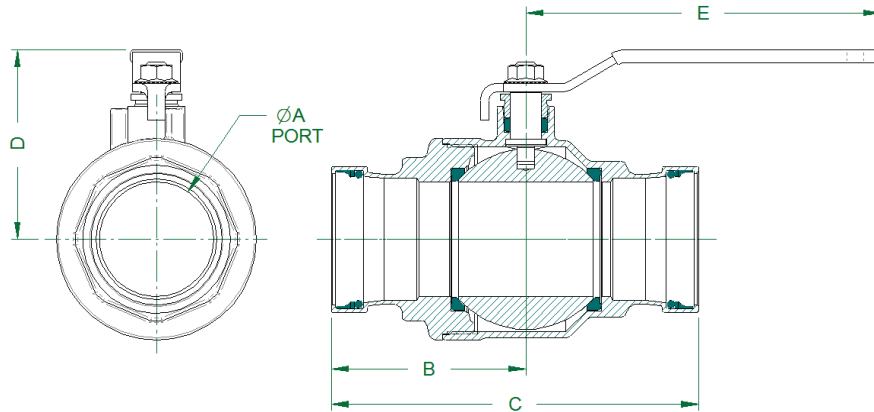

dimensions

part number	size	a	b	c	d	e	weight
77V-103-01	½"	0.50"	1.57"	2.89"	1.66"	2.85"	0.40 lbs
77V-104-01	¾"	0.75"	1.90"	3.63"	1.91"	3.86"	0.90 lbs
77V-105-01	1"	1.00"	2.20"	3.88"	2.11"	3.86"	1.20 lbs
77V-106-01	1 ¼"	1.25"	2.23"	4.22"	2.44"	4.75"	2.30 lbs
77V-107-01	1 ½"	1.50"	2.84"	5.45"	2.91"	5.42"	3.40 lbs
77V-108-01	2"	2.00"	3.40"	6.57"	3.69"	7.77"	6.00 lbs

options

option	component	size
(-01)	standard lever	all
(-04)	2 ¼" stem extension (carbon steel, zinc plated)	all
(-07)	steel tee handle	all
(-10)	stainless steel lever & nut	all
(-11)	Therma-Seal™ insulating tee handle	all
(-27)	ss latch-lock lever & nut (standard configuration)	all