

8" ROUND RETROFIT MOFLOW® SUCTION OUTLET COVER WITH SCREW AND BUSHING KIT



VGB CERTIFIED SPECIFICATIONS

Floor Flow Rating
146 GPM at 2.9 fps

Wall Flow Rating
130 GPM at 2.6 fps

Sump Depth
3" minimum

Open Area
16.1 in²

FEATURES

For retrofit only, does not include mud frame

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Easily and safely retrofits most brands' existing 8" frames and sumps that the 8MFxxx does not fit

Manufactured from superior UV-resistant engineered polymers

Four sets of different 316 stainless steel screws

Online product support including downloadable General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

32 per case



Part # R8MFxxx



Fits: AquaStar retrofit 8" models, Alloy Brass Foundry (ABF), Afras, Splash, Sta-Rite, Swimquip, Caretaker/Polaris, Advanced (APP), Hayward, and certain Custom Molded Products (CMP). At least two mud frame screws must be used to secure the cover.

STANDARD COLORS

- ☐ R8MF101 – White
- ☐ R8MF102 – Black
- ☐ R8MF103 – Light Gray
- ☐ R8MF104 – Blue
- ☐ R8MF105 – Dark Gray
- ☐ R8MF108 – Tan

Replaces p/n RLP8AVxxx,
R8HPxxx

VGB 2008 Compliant

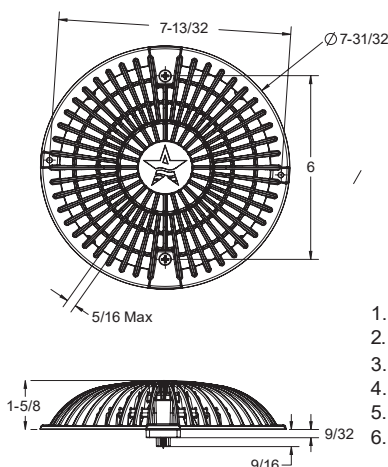

1. 8" Round Retrofit Suction Outlet Adapter, Qty 2
2. 8" Round Retrofit MoFlow Suction Outlet Cover
3. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 2
4. 10 x 1" Flat Head Phillips, 316 SS, Qty 2
5. 8 x 5/8" Pan Head Phillips, 316 SS, Qty 2
6. 10-24 x 1/2" Flat Head Machine, 316 SS, Qty 2

NOT ALL SCREWS AND HARDWARE USED FOR ALL INSTALLATIONS

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com