



Products 2022



AQUA TEK
INNOVATIVE WATER PRODUCTS
RESIDENTIAL & LIGHT COMMERCIAL

AQUA TEK
COMMERCIAL & INDUSTRIAL PRODUCTS
HEAVY INDUSTRY & COMMERCIAL

United Water Inc | 1-877-414-PURE (7873) | unitedwatercorp@gmail.com | 12427 NE 117th Ave Suite 105 Vancouver, WA USA



www.unitedwaterinc.com

Bringing over 25 years of experience in the water filtration industry, United Water is your connection to the leading suppliers of filtration and treatment products serving the residential, commercial, industrial, and food service markets.

© 2022 United Water Inc.
All Rights Reserved.



UNITED WATER

EXCEPTIONAL WATER TREATMENT PRODUCTS

At United Water, our mission is providing our customer the best options the water treatment industry has to offer. Our brand, AQUATEK, features a continuously growing line up of top-quality residential, commercial and industrial water treatment systems and filtration products. We strive for excellence and product consistency to keep our customers satisfied. With over 25 years of experience, United Water, provides big business resources, knowledge and expertise with a customer-focused, personal approach. Headquartered in Vancouver, WA, serving the Pacific Northwest and beyond, United Water is your clean water resource.

OUR BRAND – AQUATEK

Aquatek provides a highly versatile and customizable line of water products. From water softeners & media filters to housings & reverse osmosis systems, whatever your water treatment needs are, Aquatek has a solution. Aquatek products are assembled in the United States with the highest quality, industry leading parts and components. Built to last and engineered to exacting specifications.



Troy Stockdale, Owner

Troy Stockdale founded United Water in January 2013. Starting the business out of his garage it grew fast and Troy moved the company into their first warehouse in July 2013. United Water has since moved twice to larger warehouses and offices as the company continues to grow.

Troy brings years of experience and a vast knowledge of water filtration design to the business. In 1992 he started at a Culligan dealer in San Diego as a Service Technician and quickly moved up to Manager. He then went on to work for Applied Membrane and continued to expand his knowledge as a Commercial/Industrial Design Engineer. From 1999 to 2012 Troy was with CUNO/3M as the West Coast Regional Sales Manager for the Residential & Commercial divisions.

With Troy's knowledge of the market, United Water Inc. has grown to be a well-recognized manufacture and distributor of high-quality professional filtration products to plumbing wholesalers, home builders, contractors, and residential customers.

Contents

AQUATEK AT-Series Water Softeners

6-7

Two Tank ATWS and ATCWS Cabinet Softener Systems 6

Two Tank Carbon Softener Combo 6

Twin Alternating Continuous Flow ATTAWS Softener Systems 6

Two Tank HIGH IRON ATWS-HI Softener Systems 7

Nitrate ATNWS & Tannin ATTWS Softener Systems 7

DROP Connect: Smart Home Water Treatment Systems 7

Wireless Salt Sensor Add-on 11

Replacement Media 11

AQUATEK AT-Series Media & Backwashing Filters

8-9

Ozone AIO₃ Disinfecting Iron, Sulfur & Manganese ATAIO3 Systems 8Standard "All In One" AIO₂ Iron, Sulfur & Manganese ATAIOIF Systems 8

ATCBF-AS Four In One Arsenic & Iron Filters 8

ATUN-Series Up-Flow pH Neutralizers 9

ATCBF-Series Backwashing Filters 9

MEDIA OPTIONS & USES 9

Water Treatment Parts & Accessories

11

AQUATEK's Sodium Free Scale Prevention Options

10

NSPS-Series Scale Prevention Systems 10

ATSS-Series Tankless Scale Reduction Systems 10

ScaleTek High-Flow Scale Control & Conditioners 10

Ultraviolet Disinfection Systems

12

NEW from AQUATEK & Polaris the UVA-418-S22 12

Polaris UVA-C/B-Series Ultraviolet Systems 12

Polaris UVA-HO-Series High Output Ultraviolet Systems 12

Ultraviolet System Replacement Parts 12

AQUATEK Reverse Osmosis & Drinking Water Systems

13

ATPRO-Series Four & Five Stage Professional Reverse Osmosis Systems 13

ATRO-Series Four & Five Stage Standard Reverse Osmosis Systems 13

Designer Faucets 14

Drinking Water Systems 13

Inline Filters 13

After Market Compatible Filters

15

AQUATEK AT Series Housings

16

AT100 Series Housings 16

AT800 Series Whole House Housings 16

ATB Series Bag Filter Housings 16

HFHT Series Whole House High Temperature Housings 16

HFSS Series Stainless Steel Housings 16

Filter Cartridge Options

17-18

Commercial & Industrial Systems

19

AQUATEK AT-Series Commercial Media Filters 20

AQUATEK AT-Series Commercial Water Softeners 21-22

AQUATEK ATRO-Series Commercial Reverse Osmosis Systems 23

Tritton IXC-Series Commercial Reverse Osmosis Systems 24

TRITTON ROS-IXC-850 Compact RO System 24

Commercial Storage Tanks 25

Stainless Steel Commercial Filter Housings 26-27

TERMS AND CONDITIONS 2021

29



New & Featured Products

DROP CONNECT SMART HOME WATER TREATMENT SYSTEMS



Eliminate Water System Worries 24/7

Your whole home water system is essential to your well being. So, when problems arise, it's cause for alarm. From poor tasting water to high utility bills to catastrophic flooding, why not head all your water system worries off at the pass? DROP puts effortless residential water system control in the palm of your hand so you can relax and enjoy your home's water system the way it was meant to be.

More On Page **7**

AQUATEK & POLARIS UV PRESENT THE UVA-418-S22



UV Disinfection Complete Filtration System

Aquatek UVA-418-S22 water disinfection system offers a chemical-free way to safeguard your drinking water in most residential and light commercial applications. The 3 stages of treatment addresses taste and quality, odor, turbidity, chlorine reduction and utilizing the power of Polaris UV technology to sterilize and protect against harmful bacteria and viruses.

More On Page **12**

AQUATEK'S 4 IN ONE ARSENIC TREATMENT SYSTEM



Aquatek ATCBF-AS "Four In One" Yes, you read correctly - FOUR in one, with this system you can effectively treat Arsenic (As III & As V), Iron, Manganese and Hydrogen Sulfide. The oxidative chemical locked inside CR-26 beads removes arsenic using metal-oxide nano-particles that are precipitated within the resin bed where they form very strong chemical bonds with arsenite (As III) and arsenate (As V). The media is regenerated via the dissolved oxygen in the backwash water. This means chemicals such as chlorine dioxide, potassium permanganate, chlorine or sodium chloride brine solution are not needed for regeneration.

More On Page **8**

SCALE REDUCTION SYSTEMS



INTRODUCING A **GREEN** ALTERNATIVE TO WATER SOFTENING

The classic softening system uses ion exchange; exchanging calcium and magnesium ions in water with an equivalent amount of sodium (Salt). When a water softener is used, the result is "soft water", with increased sodium content in the water supply. United Water's SODIUM FREE Scale Prevention Systems offer a SALT free alternative to the drawbacks associated with hard-water.

More On Page **10**

CARBON SOFTENER COMBO



CARBON FILTRATION & WATER SOFTENING COMBINED

By adding a shelf of granulated carbon media to our Aquatek water softeners we have a new systems that provides great tasting soft water. Carbon helps to reduce foul tastes and smells including chlorine with coconut shell carbon and chloramine with centaur carbon.

More On Page **6**

AQUATEK AT-Series WATER SOFTENERS

Two Tank ATWS and ATCWS Cabinet Softener Systems



Aquathek ATWS Water Softeners are proudly manufactured and assembled in the USA with NSF® certified components. Residential Aquathek Softeners feature industry leading, high-quality components. ATWS series valves were designed with the world's water treatment professional in mind, and incorporate many features that are a direct result of feedback from customers. The valves are manufactured from composite plastics and are designed to provide high flow rates (up to 27 GPM) over a wide range of applications.

Maximum Hardness 50 gpg | Maximum Iron 2 ppm (Clear) | Pressure Range: 40-100psi

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATWS100-ME	30,000	12	1" NPT Elbow	120v. 60Hz	200 10	16 x 33	9 x 48	27 x 27 x 55	90 lbs
ATWS150-ME	45,000	15	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54	29 x 29 x 65	125lbs
ATWS200-ME	60,000	17	1" NPT Elbow	120v. 60Hz	200 20	16 x 33	12 x 52	30 x 30 x 65	150lbs
ATWS300-ME	90,000	21	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65	32 x 32 x 80	170lbs
ATCWS100-ME	30,000	12	1" NPT Elbow	120v. 60Hz	200 6	n/a	n/a	13.5 x 22.5 x 50	90 lbs
ATCWS150-ME	45,000	15	1" NPT Elbow	120v. 60Hz	200 9	n/a	n/a	13.5 x 22.5 x 50	125lbs

Twin Alternating Continuous Flow ATTAWS Softener Systems

Aquathek ATTAWS Twin Alternating Systems provide no interruptions in flow of treated (softened) water. The system alternates between two separate media tanks allowing regeneration to take place without a temporary pause in treatment. ATTAWS-Systems utilize the same industry leading, high-quality components.

Maximum Hardness 50 gpg | Maximum Iron 2 ppm (Clear) | Pressure Range: 40-100psi

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATTAWS100-ME	30,000	12	1" NPT Elbow	120v. 60Hz	200 10	16 x 33	9 x 48 (x2)	39 x 39 x 55	200lbs
ATTAWS150-ME	45,000	15	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54 (x2)	40 x 40 x 65	265lbs
ATTAWS200-ME	60,000	17	1" NPT Elbow	120v. 60Hz	200 20	16 x 33	12 x 52 (x2)	45 x 45 x 65	350lbs
ATTAWS300-ME	90,000	21	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65 (x2)	52 x 52 x 80	530lbs

AQUATEK AT-Series Specialty Water Softeners

Two Tank Carbon Softener Combo

Aquathek ATWS-C & ATWS-CC Carbon Combo Softeners These specialty systems combine two units into one providing an economical option for improved taste, odor reduction and the removal of Chlorine with -C models (Coconut Shell Carbon) or Chloramine with -CC models (Centaur Carbon). Removing these contaminants adds longevity to the water softener and helps keeps maintenance costs lower over time. These units utilize the same high quality components as the ATWS systems with an added shelf in the media tank allowing for a bed of granulated carbon media to remove contaminants and soften water simultaneously.

Maximum Hardness 50 gpg | Maximum Iron 2 ppm (Clear) | Pressure Range: 40-100psi

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATWS100-C	30,000	6.5	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54	29 x 29 x 65	125lbs
ATWS100-CC	30,000	6.5	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54	29 x 29 x 65	125lbs
ATWS150-C	45,000	9	1" NPT Elbow	120v. 60Hz	200 20	16 x 33	13 x 54	32 x 32 x 65	150lbs
ATWS150-CC	45,000	9	1" NPT Elbow	120v. 60Hz	250 20	18 x 33	13 x 54	32 x 32 x 65	150lbs



Two Tank HIGH IRON ATWS-HI Softener Systems

Aquatek ATWS-HI High Iron Softeners utilize speciality resin with Shallow Shell Technology that has been proven to significantly reduce iron fouling of softener resin. Heavy metal (iron) fouling of resin builds from the center out. Chemical regenerate strength diminishes as it travels to the center of the bead and the effectiveness of the regenerate is reduced. The solid core provides superior performance by preventing iron fouling allowing a higher chemical conversion resulting in a more completely regenerated media bed. The higher regeneration efficiency provides quicker rinse time, salt usage and removes the opportunity to compound iron fouling. *Mineral Cleaner & 5 Micron Sediment Filter Recommended*

Maximum Hardness 50 gpg | Maximum Iron 10 ppm (Clear) | Pressure Range: 40-100psi

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATWS100-HI	30,000	12	1" NPT Elbow	120v. 60Hz	200 10	16 x 33	9 x 48	27 x 27 x 55	90 lbs
ATWS150-HI	45,000	15	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54	29 x 29 x 65	125lbs
ATWS200-HI	60,000	17	1" NPT Elbow	120v. 60Hz	200 20	16 x 33	12 x 52	30 x 30 x 65	150lbs
ATWS300-HI	90,000	21	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65	32 x 32 x 80	170lbs

Nitrate ATNWS & Tannin ATTWS Softener Systems

ATNWS NITRATE - Media type: Cation / Nitrate

Nitrates are ions created when nitrogen combines with oxygen. Nitrates can occur both naturally and synthetically. The nitrate ion is composed of one nitrogen atom and three atoms of oxygen (NO₃). Traditional water softeners like our ATWS-Systems do not remove nitrates from the water, however, Aquatek ATNWS-Systems will reduce Nitrates and soften your water simultaneously. .

ATTWS TANNIN - Media type: Cation / Tannin

Tannins are fermented organic materials that are created by the breakdown of vegetation. Tannins can cause yellow water and yellow staining on fabrics and fixtures. Tannins measuring 0.5 PPM or higher may cause staining and/or interference with various water treatment processes. ATTWS-Systems are formulated to remove Tannins and soften your water.

Maximum Hardness 50 gpg | Maximum Iron 0 ppm (Clear) | Pressure Range: 40-100psi

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATNWS200-ME	30,000	14	1" NPT Elbow	120v. 60Hz	250 20	16 x 33	12 x 52	30 x 30 x 65	150lbs
ATNWS300-ME	45,000	17	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65	32 x 32 x 80	170lbs
ATTWS200-ME	30,000	14	1" NPT Elbow	120v. 60Hz	250 20	16 x 33	12 x 52	30 x 30 x 65	150lbs
ATTWS300-ME	45,000	17	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65	32 x 32 x 80	170lbs

DROP Connect: Smart Home Water Treatment Systems



DROP
PROTECT WHAT MATTERS

Eliminate Water System Worries 24/7

Your whole home water system is essential to your well being. So, when problems arise, it's cause for alarm. From poor tasting water to high utility bills to catastrophic flooding, why not head all your water system worries off at the pass? DROP puts effortless residential water system control in the palm of your hand so you can relax and enjoy your home's water system the way it was meant to be.

Leak protection: Our DROP Leak Detector units allow our home water softener systems to monitor water usage for indications of leaks. When leaks are detected, the system is alerted and water is shut off, preventing untold damage to the home. You will also be notified through the DROP App.

Water savings: You can monitor your water use in real time and receive notifications and alerts to help keep water waste to a minimum. You can even shut off your water remotely or program your system for automatic shutoff.

Maximum Hardness 50 gpg | Maximum Clear Iron 2 ppm

MODEL NUMBER	GRAIN CAPACITY	FLOW RATE	PIPE SIZE.	ELEC.	SALT CAP USAGE	BRINE TANK DIM.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
S-32	30,000	12	1" NPT Elbow	120v. 60Hz	200 10	16 x 33	9 x 48	27 x 27 x 55	90 lbs
S-48	45,000	15	1" NPT Elbow	120v. 60Hz	200 15	16 x 33	10 x 54	29 x 29 x 65	125lbs
S-64	60,000	17	1" NPT Elbow	120v. 60Hz	200 20	16 x 33	12 x 52	30 x 30 x 65	150lbs
S-90	90,000	21	1.25" NPT	120v. 60Hz	250 30	18 x 33	14 x 65	32 x 32 x 80	170lbs
C-32 (cabinet)	30,000	12	1" NPT Elbow	120v. 60Hz	200 6	n/a	n/a	13.5 x 22.5 x 50	90 lbs
D-LD	Leak Detector			120v. 60Hz					



AQUATEK AT-Series Water Treatment Systems

Ozone AIO₃ Disinfecting Iron, Sulphur & Manganese ATAIO3 Systems



Aquatek ATAIO3 Series Ozone Systems provide a highly versatile solution to your treatment needs. Ozone is a triatomic oxygen (O₃) which has high oxidation capabilities. Ozone is the most effective and rapidly acting primary disinfectant for media bed available. Along with disinfection, the use of ozone for drinking water treatment has many other benefits such as improved taste and color removal, iron, manganese and sulfur removal. Ozone's high oxidation potential gives it excellent germicidal properties. Ozone is 52% stronger than chlorine, and will oxidize much more rapidly without the use of harsh chemicals.

Maximum Iron 20 ppm | Maximum Hydrogen Sulfide 10 ppm | Pressure Range: 40-100psi

MODEL NUMBER	FLOW RATE	BACKWASH RATE	PIPE SIZE.	ELEC.	MEDIA BED	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATAIO3-1.0	6	5.3	1" NPT Elbow	120v. 60Hz	ZeoLite	9 x 48	12 x 12 x 58	150lbs
ATAIO3-1.5	7	5.3	1" NPT Elbow	120v. 60Hz	ZeoLite	10 x 54	13 x 13 x 62	190lbs
ATAIO3-2.0	9	7.5	1" NPT Elbow	120v. 60Hz	ZeoLite	12 x 52	15 x 15 x 63	250lbs
ATAIO3-3.0	12	10	1.25" NPT	120v. 60Hz	ZeoLite	14 x 65	17 x 17 x 75	350lbs

Standard "All In One" AIO₂ Iron, Sulfur & Manganese ATAIOIF Systems



Aquatek ATAIOIF Series Filters reduce Iron, Hydrogen Sulfide (sulfur) & Manganese "All In One" filtration system. All natural and chemical free media bed provides excellent depth filtration of precipitated iron while increasing pH to enhance iron reduction performance. These systems utilize an air chamber within the tank to oxidize and capture the elements before filtering through the media bed.

Maximum Iron 10 ppm | Maximum Hydrogen Sulfide 2 ppm | Pressure Range: 40-100psi

MODEL NUMBER	FLOW RATE	BACKWASH RATE	PIPE SIZE.	ELEC.	MEDIA BED	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATAIOIF-1.0	6	5.3	1" NPT Elbow	120v. 60Hz	ZeoLite	9 x 48	12 x 12 x 58	150lbs
ATAIOIF-1.5	7	5.3	1" NPT Elbow	120v. 60Hz	ZeoLite	10 x 54	13 x 13 x 62	190lbs
ATAIOIF-2.0	9	7.5	1" NPT Elbow	120v. 60Hz	ZeoLite	12 x 52	15 x 15 x 63	250lbs
ATAIOIF-3.0	12	10	1.25" NPT	120v. 60Hz	ZeoLite	14 x 65	17 x 17 x 75	350lbs

Aquatek ATCBF-AS "Four In One" Arsenic, Iron, Manganese & Sulfur Systems



Aquatek ATCBF-AS "Four In One" Yes, you read correctly - FOUR in one, with this system you can effectively treat Arsenic (As III & As V), Iron, Manganese and Hydrogen Sulfide. The oxidative chemical locked inside CR-26 beads removes arsenic using metal-oxide nano-particles that are precipitated within the resin bed where they form very strong chemical bonds with arsenite (As III) and arsenate (As V). The media is regenerated via the dissolved oxygen in the backwash water. This means chemicals such as chlorine dioxide, potassium permanganate, chlorine or sodium chloride brine solution are not needed for regeneration.

MODEL NUMBER	FLOW RATE	BACKWASH RATE	PIPE SIZE.	ELEC.	MEDIA BED	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATCBF-1.0-AS			1" NPT Elbow	120v. 60Hz	CR-26	9 x 48	12 x 12 x 58	100lbs
ATCBF-2.0-AS			1" NPT Elbow	120v. 60Hz	CR-26	12 x 52	15 x 15 x 63	150lbs
ATCBF-3.0-AS			1.25" NPT	120v. 60Hz	CR-26	14 x 65	17 x 17 x 75	200lbs



AQUATEK ATUN-Series Up-Flow pH Neutralizers

Aquatek ATUN-Series Up-Flow Neutralizers help to mitigate & neutralize pH. Featuring a translucent tank for quickly viewing media fill level. Designed for continuous backwashing during use. No control valve no drain line or electricity required.

MODEL NUMBER	FLOW RATE	PIPE SIZE.	PSI LIMITS	MEDIA BED	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
ATUN1001	6	1" NPT Elbow	40-100 psi	Calcite	9 x 48	12 x 12 x 58	125lbs
ATUN1501	7.5	1" NPT Elbow	40-100 psi	Calcite	12 x 52	15 x 15 x 63	185lbs
ATUN2001	9	1.25" NPT	40-100 psi	Calcite	12 x 52	15 x 15 x 63	235lbs

AQUATEK ATCBF-Series Backwashing Filters



Aquatek ATCBF Backwashing water filters are highly versatile tank & valve style filters which, depending on desired results and media choice, can provide a wide variety treatment options. Backwashing consists of reversing the flow of water so that it enters from the bottom of the filter bed, lifts and rinses the bed, then exits through the top of the filter tank. Aquatek backwashing filter control valves and media tanks are programmed filled to desired customer needs (*see Filtration Media Options below*).

MEDIA OPTIONS & USES:

COCONUT SHELL CARBON	CENTAUR CARBON	CALCITE	pH NEUTRALIZER
Chlorine, Taste, Odor	Chloramine, Hydrogen Sulfide/Sulfur	pH Adjustment Above 6	pH Adjustment Below 6

Standard Tank ATCBF Systems | -DH Dome Hole Tanks Available on certain models see above

	MODEL NUMBER	FLOW RATE	BACKWASH RATE	PIPE SIZE.	PSI LIMITS	ELEC.	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
LESS MEDIA	ATCBF-1.0	-	4.2	1" NPT Elbow	40-100 psi	120v. 60Hz	9 x 48	12 x 12 x 58	30lbs
	ATCBF-1.5	-	5.3	1" NPT Elbow	40-100 psi	120v. 60Hz	10 x 54	13 x 13 x 62	40lbs
	ATCBF-2.0	-	7.5	1" NPT Elbow	40-100 psi	120v. 60Hz	12 x 52	15 x 15 x 63	50lbs
	ATCBF-3.0	-	8.5	1.25" NPT	40-100 psi	120v. 60Hz	14 x 65	17 x 17 x 75	70lbs
COCONUT SHELL CARBON	ATCBF-1.0-C	4.5	4.2	1" NPT Elbow	40-100 psi	120v. 60Hz	9 x 48	12 x 12 x 58	75lbs
	ATCBF-1.5-C	6.5	5.3	1" NPT Elbow	40-100 psi	120v. 60Hz	10 x 54	13 x 13 x 62	95lbs
	ATCBF-2.0-C	9	7.5	1" NPT Elbow	40-100 psi	120v. 60Hz	12 x 52	15 x 15 x 63	125lbs
	ATCBF-3.0-C	13	8.5	1.25" NPT	40-100 psi	120v. 60Hz	14 x 65	17 x 17 x 75	165lbs
CENTAUR CARBON	ATCBF-1.0-CC	4.5	4.2	1" NPT Elbow	40-100 psi	120v. 60Hz	9 x 48	12 x 12 x 58	75lbs
	ATCBF-1.5-CC	6.5	5.3	1" NPT Elbow	40-100 psi	120v. 60Hz	10 x 54	13 x 13 x 62	95lbs
	ATCBF-2.0-CC	9	7.5	1" NPT Elbow	40-100 psi	120v. 60Hz	12 x 52	15 x 15 x 63	125lbs
	ATCBF-3.0-CC	13	8.5	1.25" NPT	40-100 psi	120v. 60Hz	14 x 65	17 x 17 x 75	165lbs
CALCITE	ATCBF-1.0-N	4.5	4.2	1" NPT Elbow	40-100 psi	120v. 60Hz	9 x 48	12 x 12 x 58	85lbs
	ATCBF-1.5-N	6.5	5.3	1" NPT Elbow	40-100 psi	120v. 60Hz	10 x 54	13 x 13 x 62	105lbs
	ATCBF-2.0-N	9	7.5	1" NPT Elbow	40-100 psi	120v. 60Hz	12 x 52	15 x 15 x 63	135lbs
	ATCBF-3.0-N	13	8.5	1.25" NPT	40-100 psi	120v. 60Hz	14 x 65	17 x 17 x 75	175lbs
pH NEUTRALIZER	ATCBF-1.0-pH	4.5	4.2	1" NPT Elbow	40-100 psi	120v. 60Hz	9 x 48	12 x 12 x 58	85lbs
	ATCBF-1.5-pH	6.5	5.3	1" NPT Elbow	40-100 psi	120v. 60Hz	10 x 54	13 x 13 x 62	105lbs
	ATCBF-2.0-pH	9	7.5	1" NPT Elbow	40-100 psi	120v. 60Hz	12 x 52	15 x 15 x 63	135lbs
	ATCBF-3.0-pH	13	8.5	1.25" NPT	40-100 psi	120v. 60Hz	14 x 65	17 x 17 x 75	175lbs

Aquatek ATCBF-DH DOME HOLE TANKS Dome Hole Tanks are available for 1, 1.5 & 2 cubic foot models below, just add "-DH" to desired Model Number. Subject to additional charges. Larger systems available, please call 877-414-7873 for more information.



AQUATEK'S Sodium Free Scale Prevention Options

NSPS-Series Scale Prevention Systems

A GREEN Alternative to Conventional Water Softening



FEATURES

- Maintenance free – no electricity, cost for salt, additional water usage or regeneration material needed
- A **GREEN** alternative to traditional water softening
- Filtersorb SP3 Media prevents the negative effects of calcium & magnesium on your plumbing and appliances while allowing the positive health benefits of the minerals to remain in your drinking water.

Complete System Contents:

- ENPRESS® Vortech™ Pressure Vessel
- Riser Tube (Pre-Installed)
- Filtersorb SP3 Filter Media (May be Pre-Installed)
- C-Series In/Out Tank Head
- C-Series Bypass
- 1" NPT PVC Plumbing Adapters
- C- Series Wrench
- 1" x 10" Whole House Filter Housing for 8", 9" and 10" Tanks
- 10" GAC Carbon Pre-Filter for 8", 9" and 10" Tanks
- 1" x 20" Whole House Filter Housing for 12" & 13" Tanks
- 20" GAC Carbon Pre-Filter for 12" & 13" Tanks
- Filter Housing Wrench
- Wall Mount Bracket for Big Blue Housings

Maximum Hardness 80 gpg | Maximum Iron 0.3 ppm (Clear) | Maximum Manganese 0 ppm

MODEL NUMBER	FLOW RATE	MEDIA CAPACITY	IN / OUT CONNECTION	PSI LIMITS	TEMP RANGE	MINERAL TANK DIM.	SYSTEM DIM.	PACK WT.
NSPS-0844	10	3 Liters	1" NPT Elbow	15-100 psi	41°-149° F	8 x 44	9 x 14 x 50	40lbs
NSPS-0948	12	4 Liters	1" NPT Elbow	15-100 psi	41°-149° F	9 x 48	9 x 15 x 53	42lbs
NSPS-1054	15	4.5 Liters	1" NPT Elbow	15-100 psi	41°-149° F	10 x 54	11 x 15 x 60	44lbs
NSPS-1252	20	6.5 Liters	1.25" NPT	15-100 psi	41°-149° F	12 x 52	13 x 16 x 58	49lbs
NSPS-1354	25	7.5 Liters	1.25" NPT	15-100 psi	41°-149° F	13 x 54	14 x 17 x 60	51lbs

ATSS-Series Tankless Scale Reduction Systems *Ideal for Tankless Water Heaters*

Aquatek ATSS-Series utilize SLOW PHOS® which is a form of slowly soluble poly-phosphate in small glassy beads which has been engineered to dissolve at a slow controlled concentration to inhibit scale formation and corrosion. Benefits include scale prevention, corrosion inhibition, & Iron control.



	MODEL NUMBER	FLOW RATE	IN / OUT CONNECTION	PSI LIMIT	TEMP LIMIT	DIMENSIONS	PACK WT.
COMPLETE SYSTEM	ATSS-34	6	3/4" NPT	90 psi	100° F max	14 x 5 x 5	6 lbs
	ATSS-234	12	3/4" NPT	90 psi	100° F max	24 x 5 x 5	8 lbs
CARTRIDGE ONLY	NP420	6	N/A	90 psi	100° F max	2.5 x 10	1 lbs
	NP420-2	12	N/A	90 psi	100° F max	2.5 x 20	2 lbs

ST-Series ScaleTek High-Flow Scale Control & Conditioners

ScaleTek has unlocked the issue of Hard Water Scale with a revolutionary patent pending media. The technology behind this filter media is quite simple. By using this media, we are able to treat the Carbonate portion of hard water therefore delivering Scale Controlled water throughout the home or office.

	MODEL NUMBER	MAX HARDNESS	FLOW RATE	IN / OUT CONNECTION	PSI LIMIT	TEMP LIMIT	DIMENSIONS	PACK WT.
COMPLETE SYSTEM	ST-SCS1	25 GPG	10	1"	100 psi	100° F max	17 x 7	8 lbs
	ST-SCS2	25 GPG	18	1.5"	100 psi	100° F max	27 x 7	14 lbs
COMPLETE SCALE CONTROL & CONDITIONING* SYSTEM	ST-SCCS3	25 GPG	10	1"	100 psi	100° F max	17 x 16	24lbs
	ST-SCCS4	25 GPG	18	1"	100 psi	100° F max	27 x 16	34lbs
	ST-SCCS5	25 GPG	18	1.5"	100 psi	100° F max	27 x 16	34lbs
REPLACEMENT CARTRIDGES	ST-4150 (SCS1)	25 GPG	10	-	100 psi	100° F max	4.5 x 10	2.5lbs
	ST-4520 (SCS2)	25 GPG	18	-	100 psi	100° F max	4.5 x 20	4lbs
	ST-4510-K (SCCS3)	25 GPG	10	-	100 psi	100° F max	(2) 4.5 x 10	6lbs
	ST-4520-K (SCS4/5)	25 GPG	18	-	100 psi	100° F max	(2) 4.5 x 20	8lbs



Water Treatment Replacement Parts, Tanks & Media

Treatment Media

MODEL NUMBER	MEDIA DESCRIPTION
CARBON	MCB-CS Coconut Shell Carbon - Chlorine & Organics 1 cu. ft. 27lbs
	MCTC-1.0-B Centaur Carbon - Chloramine & Hydrogen Sulfide 1 cu. ft. 40lbs
SOFTENER RESIN	MCG-B8 Water Softener Cation Ion Exchange Resin 1 cu. ft. 50lbs
	MSST-60 High Iron Shallow Shell Water Softener Ion Exchange Resin 1 cu. ft. 50lbs
	MN-1.0-B Nitrate Specific Anion Water Softener Resin 1 cu. ft. 45lbs
	MT-1.0-B Tannin Specific Anion Water Softener Resin 1 cu. ft. 45lbs
	MSGB-2-B pH Lowering Anion Resin 1 cu. ft. 43lbs
IRON	MZL-0.5-B ZeoLite Iron Filter Media 0.5 cu. ft. 25lbs
	MZL-0.75-B ZeoLite Iron Filter Media 0.75 cu. ft. 38lbs
	MZL-1.0-B ZeoLite Iron Filter Media 1 cu. ft. 50lbs
AS	CR26 CR26 Arsenic, Iron, Manganese & Hydrogen Sulfide Media 1 cu. ft. 45lbs
MISC	MCPC-45-B Calcite Media 0.5 cu. ft. 45lbs
	MFS-1L Filtersorb SP3 Scale Prevention Media 1 liter
	pH Plus Magnesium Oxide 5lb Jar
	MCX Magnesium Oxide 0.66 cu. ft. Bag 50lbs
	CMG85-6 KDF Media Guard 6 Chamber - Well Water 7lbs
GRAVEL	MGV20-12 Gravel Underbed Media 12lbs for 1 cu. ft. media tanks
	MGV20-15 Gravel Underbed Media 15lbs for 1.5 cu. ft. media tanks
	MGV20-25 Gravel Underbed Media 25lbs for 2 cu. ft. media tanks
	MGV20-50 Gravel Underbed Media 50lbs for 3 cu. ft. media tanks

Tanks

MODEL NUMBER	TANKS DESCRIPTION
BT1633-H-C	Brine Tank Complete - Square Black - 16x16x33
BT1833-H-C	Brine Tank Complete - Round Black - 18x33
AT-0948BK-25T	Media Tank Black - 9x48 - 2.5, Standard Base
AT-1035BK-25T	Media Tank Black - 10x35 - 2.5, Standard Base
AT-1054BK-25T	Media Tank Black - 10x54 - 2.5, Standard Base
AT-1252BK-25T	Media Tank Black - 12x52 - 2.5, Standard Base
AT-1354BK-25T	Media Tank Black - 13x54 - 2.5, Standard Base
AT-1465BK-25T	Media Tank Black - 14x65 - 2.5, Standard Base

Valves & Parts

MODEL NUMBER	PARTS DESCRIPTION
CS960-S	Clack WSI Softener Valve
C950-AIO	Clack WSI Iron Filter Valve
C940-F	Clack WSI Backwashing Valve
V3006	Clack WSI Bypass
V3007-04	Clack WSI 1" Male NPT
V3007-16	Clack WSI 1" Male NPT Elbow
V3007-02	Clack WSI 1" Sweat Lead Free Brass
V3007-13	Clack WSI 1" Shark Bite Lead Free Brass
V3007-20	Clack WSI 1" John Guest Elbow QC Plastic
V3007-17	Clack WSI 1" John Guest QC Plastic
V3007-PEX	Clack WSI 1" Pex Connection Kit
V3007-01	Clack WSI Kit 3/4" or 1" Elbow Solvent
V3007-05	Clack WSI 1.25" Straight Connection Kit
V3191-01	Clack WSI Angle Adapters
V3005	Clack WSI Seal & Spacer Kit
V3011	Clack WSI Piston Assembly
V3174	Clack WSI Brine Piston
V3186	Clack WSI Transformer 12v
V3193-02	Clack WSI Wrench
V3108	Clack WSI 5 Button Softener Circuit Board
V3108-CC	Clack WSI 5 Button AIO CC Circuit Board
V3010TC	Clack WSI 3 Button Time Clock Circuit Board
V3100-OZBARBCV	Clack Ozone 3/16x3/16" Barb Check Valve
V3100-OZBCV	Clack Ozone Brine Elbow Check Valve
V3100-OZCK	Ozone Cleaning Kit
V3100CV-BE	Clack Brine Elbow Check Valve - complete
V3100CV-I	Clack Valve Inlet Check Valve
V3150	Clack Split Ring
V3158-01	Clack WSI Drain Elbow w/ Silencer
V3010-ID	Clack WSI Injector - 8-10" Tank - Red
V3010-IE	Clack WSI Injector - 12-14" Tank - White
V3162-1.3	Clack DLFC 1.3 gpm
V3162-1.7	Clack DLFC 1.7 gpm
V3162-2.7	Clack DLFC 2.7 gpm
V3162-3.2	Clack DLFC 3.2 gpm
V3162-4.2	Clack DLFC 4.2 gpm
V3162-5.3	Clack DLFC 5.3 gpm

Don't see what you need? Please call 877-414-PURE (7873)



Ultraviolet Disinfection Systems



UVA-418-S22

Aquatek UVA-418-S22 water disinfection system offers an economical and chemical-free way to ensure potability and safeguard your drinking water in most residential and light commercial applications. Perfect for applications up to 18 gpm and with the 3 stages of treatment addresses taste and quality, odor, turbidity, chlorine reduction and utilizing the power of Polaris UV technology to sterilize and protect against harmful bacteria and viruses.



Polaris UVA-C Series Ultraviolet Systems



Polaris UVA-HO-Series High Output Ultraviolet Systems

MODEL NUMBER	FLOW RATE	LAMP WATTS	MICRO JOULES	IN / OUT CONNECTION	PSI LIMITS	MAX TEMP	ELEC.	SYSTEM DIM.	PACK WT.
UVA-418-S22**	18	48W	30000	1" NPT	15-120 psi	35°-104°	120v / 220v	25 X 12 X 28	35 LBS
UVA-1C	1	10W	30000	1/4" MNPT	125	35°-104°	120v / 220v	10.47 x 2	29lbs
UVA-2C	2	14W	30000	1/4" MNPT	125	35°-104°	120v / 220v	13.74 x 2.5	36lbs
UVA-4C	4	17W	30000	1/2" MNPT	125	35°-104°	120v / 220v	15.5 x 2.5	29lbs
UVA-6C	6	24W	30000	1/2" MNPT	125	35°-104°	120v / 220v	23.23 x 2.5	44lbs
UVA-8C	8	32W	30000	3/4" MNPT	125	35°-104°	120v / 220v	27.87 x 2.5	46lbs
UVA-12C	12	39W	30000	3/4" MNPT	125	35°-104°	120v / 220v	36.81 x 2.5	57lbs
UVA-24B	24	39W	30000	1" MNPT	125	35°-104°	120v / 220v	36.93 x 3.5	29lbs
UVA-418HO	18	48W	30000	3/4" / 1"	125	35°-104°	120v / 220v	10.47 x 2	13.2lbs
UVA-630HO	30	58W	30000	3/4" / 1"	125	35°-104°	120v / 220v	13.74 x 2.5	15.4lbs
UVA-946HO	46	90W	30000	1.5"	125	35°-104°	120v / 220v	15.5 x 2.5	17.6lbs

Ultraviolet System Replacement Parts

MODEL NUMBER	TYPE	DESCRIPTION	MODEL NUMBER	TYPE	DESCRIPTION
GL10PP	LAMP	Replacement Lamp for UVA-1C	QS10	QUARTZ SLEEVE	Replacement Sleeve for UVA-1C
GL14PP	LAMP	Replacement Lamp for UVA-2C	QS14	QUARTZ SLEEVE	Replacement Sleeve for UVA-2C
GL17PP	LAMP	Replacement Lamp for UVA-4C	QS17	QUARTZ SLEEVE	Replacement Sleeve for UVA-4C
GL24PP	LAMP	Replacement Lamp for UVA-6C	QS24	QUARTZ SLEEVE	Replacement Sleeve for UVA-6C
GL32PP	LAMP	Replacement Lamp for UVA-8C	QS32	QUARTZ SLEEVE	Replacement Sleeve for UVA-8C
GL39PP	LAMP	Replacement Lamp for UVA-12C/24B	QS39	QUARTZ SLEEVE	Replacement Sleeve for UVA-12C/24B
GLHO48PP	LAMP	Replacement Lamp for UVA-418HO	QS48HO	QUARTZ SLEEVE	Replacement Sleeve for UVA-418HO
GLHO58PP	LAMP	Replacement Lamp for UVA-630HO	QS58HO	QUARTZ SLEEVE	Replacement Sleeve for UVA-630HO
GLHO90PP	LAMP	Replacement Lamp for UVA-946HO	QS90HO	QUARTZ SLEEVE	Replacement Sleeve for UVA-946HO

REPLACEMENT UV BALLAST CONTROLLER

BEB-1024	BALLAST CONTROLLER	Ballast for UVA-1C thru UVA-4C
BEB-2439	BALLAST CONTROLLER	Ballast for UVA-6C thru UVA-24B
HOB-4890	BALLAST CONTROLLER	Ballast for High Output UVA-HO



AQUATEK Reverse Osmosis Drinking Water Systems



Aquatek ATPRO-Series keeps your drinking water clean and safe and reduces the levels of lead, nitrates, cysts (cryptosporidium, giardia), arsenic, sodium and other contaminants commonly found in unfiltered tap water. If other systems are just base models, the **Aquatek ATPRO-Series** comes very well equipped with features other water systems simply don't offer.

Aquatek ATRO-Series REVERSE OSMOSIS (RO) is one of the most convenient and economical methods of reducing unwanted contaminants in your drinking water. These systems provide up to 50 gallons per day (GPD) of clean, clear, refreshing drinking water for residential and light commercial use.

ICF-2512-ALK Upgrade & enjoy the numerous health benefits of Alkaline Water and upgrade ANY Aquatek Reverse Osmosis system with our inline Alkaline filter (ICF-2512-ALK) to provide you with an endless supply of Alkaline Water at home.

Daily Production 50 GPD | Micron 0.0005 | 3.2 Gallon Storage Tank

MODEL NUMBER	DESCRIPTION	REPLACEMENT CARTRIDGES
ATPRO-50-ALK	Pro-Series ALKALINE Water Reverse Osmosis w/Quick Change Filter Cartridges	HDGT-SED5, HDGT-CB5, HDGT-CB5P, HDGT-TW50
ATPRO-50	Pro-Series Reverse Osmosis w/Quick Change Filter Cartridges	HDGT-SED5, HDGT-CB5, HDGT-CB5P, HDGT-TW50 + ICF-2512-ALK
ATRO-550-ALK	ATRO Alkaline Water Five Stage Reverse Osmosis w/Standard Cartridges	(2) CB-25-1005, MB-25098-05, IFC-10, TW812-50, ICF-2512-ALK
ATRO-550	ATRO Five Stage Reverse Osmosis w/Standard Cartridges	(2) CB-25-1005, MB-25098-05, IFC-10, TW812-50
ATRO-450-ALK	ATRO Alkaline Water Four Stage Reverse Osmosis w/Standard Cartridges	CB-25-1005, MB-25098-05, IFC-10, TW812-50, ICF-2512-ALK
ATRO-450	ATRO Four Stage Reverse Osmosis w/Standard Cartridges	CB-25-1005, MB-25098-05, IFC-10, TW812-50

Drinking Water Systems



TL3-KIT Reduces chlorine, cysts, bacteria, viruses, lead, lindane, atrazine, VOC's and MTBE with 1/4 turn quick change filters, no need to shut-off the water when changing filters



ELF IM-C Lead Reduction Cartridge

- Commercial and Residential Drinking Water Systems
- Pre- and Post- R.O. Filtration
- Water Coolers
- Food Service



BGDWS-1500-FF & BGDWS-HFF

These Drinking Water Systems utilize one of two popular BevGuard® SQC Cartridges. Each contains a 0.5 micron compressed carbon block and poly-phosphate scale inhibitor.

MODEL NUMBER	DESCRIPTION	REPLACEMENT CARTRIDGE	MICRON	CAP	FLOW RATE	FTP
BGDWS-HFF	BevGuard High Flow DWS - Full Flow	BGE-3200S	0.5	29,000	2.1	1/4"
BGDWS-1500-FF	BevGuard DWS - Full Flow	BGE-1200S	0.5	1,500	1.67	1/4"
ELF-IML-C	Omnipure Lead Reduction DWS - Full Flow	ELF-IML	0.5	1,500	1.5	1/4"
TL3-KIT	Neo-Pure Ultrafiltration DWS	2802110-00 x2 2802140-00 x1	0.025	1,000	1	1/4"
TL3-KITNF	Neo-Pure Ultrafiltration DWS - <u>NO Faucet</u>		0.025	1,000	1	1/4"
BGDWS-1500	BevGuard DWS - w/Faucet	BGE-1200S	0.5	1,500	1	1/4"
L5615-C	Omnipure Lead & Cyst Reduction DWS	L-5615	0.5	1,500	1	1/4"



Designer Faucets

LF Series Designer Faucets are the best choice for lead free NSF certified faucets and are available in a wide variety of styles and finishes.



MODEL NUMBER	DESCRIPTION	AIR GAP	FINISH
LF-EC32-CPAG	Designer Ceramic Disk, with air gap	Yes	Chrome
LF-EC32-BNAG	Designer Ceramic Disk, with air gap	Yes	Brushed Nickel
LF-EC25-CPAG	Designer Ceramic Disk, with air gap	Yes	Chrome
LF-EC25-BNAG	Designer Ceramic Disk, with air gap	Yes	Brushed Nickel
FCT-103AG-CH	Reverse Osmosis with air gap	Yes	Chrome
LF-BLRAG-BN	Reverse Osmosis with air gap	Yes	Brushed Nickel
LF-EC32-CP	Designer Ceramic Disk, non air gap	No	Chrome
LF-EC32-BN	Designer Ceramic Disk, non air gap	No	Brushed Nickel
LF-EC25-CP	Designer Ceramic Disk, non air gap	No	Chrome
LF-EC25-BN	Designer Ceramic Disk, non air gap	No	Brushed Nickel
LF-EC25-ORB	Designer Ceramic Disk, non air gap	No	Oil Rubbed Bronze
LF-LR-STND	Standard long reach, non air gap	No	Chrome
LF-BLR-BN	Standard long reach, non air gap	No	Brushed Nickel

LF Series Designer Faucets have two primary options/differences - Air Gap & Non Air Gap. If you have a reverse osmosis unit, we recommend using an air gap faucet. We also recommend that you check your local plumbing codes as some will require Air Gaps.

Inline Filters, RO & DWS Replacement Cartridges

MODEL NUMBER	DESCRIPTION	MICRON	CAPACITY (GAL)	FLOW RATE	FTP	CASE
ICF-2512-ALK	Inline Alkaline/ORP Filter: 2000 GAL 2.5" x 12"	-	2,000	0.5	1/4"	25
ICF-6	Inline Filter Coconut Shell Carbon 2" x 6"	5	1,000	0.5	1/4"	50
ICF-10	Inline Filter Coconut Shell Carbon 2" x 10"	5	2,000	0.5	1/4"	25
K5615BB	Inline Filter Carbon Block w/Lead & Cyst Reduction 2.5" x 10"	5	1,500	0.5	1/4"	25
ELF-IML	Omnipure ELF-IML Full Flow, Lead & Cyst Reduction	0.5	1,500	1.5	-	12
L5615	Omnipure L5615, Lead & Cyst Reduction	0.5	1,500	0.5	-	12
2802110-00	Neo-Pure TL3 Carbon Block (x2)	0.5	1,000	1	-	1
2802140-00	Neo-Pure TL3 Hollow Fiber Membrane	0.025	1,000	1	-	1
TW812-50	RO Membrane, 50 gpd TW812-50	0.0025	50 (gpd)	n/a	-	1
HDGT-SED5	5 Micron Sediment Prefilter	5	50 (gpd)	n/a	-	1
HDGT-CB5	5 Micron Carbon Block Prefilter	5	50 (gpd)	n/a	-	1
HDGT-CB5P	Carbon Post/Polishing Filter	0.0002	50 (gpd)	n/a	-	1
HDGT-TW50	50 gpd Membrane	5	50 (gpd)	n/a	-	1
HDGT-KIT	ATPRO replacement kit: HDGT-SED5, HDGT-CB5, HDGT-CB5P, HDGT-TW50	0.0002	50 (gpd)	n/a	-	4



Aftermarket Compatible Filters

	MODEL NUMBER	EQUIVALENT	CS
EVERPURE METAL HOUSING	BGE-1200	OW-200L, OW2, OW4, 2H-L, 4H-L, 2FC, 2FC-S, AC, 4C, 4H, OCS2, BH2, 2K-Plus, 4K-Plus, 2CB-GW, 2CB-5, 2CB-K	6
	BGE-1200S	OW-200L, OW2, OW4, 2H-L, 4H-L, 2FC, 2FC-S, AC, 4C, 4H, OCS2, BH2, 2K-Plus, 4K-Plus, 2CB-GW, 2CB-5, 2CB-K	6
	BGE-3200	2FC, 4CB5, 4FC, 4FC5, 4HC-H, 7TO-BW, 7FC, MC, MC2, XC, XC2	4
	BGE-3200S	2FC-S, 2K Plus, 4CB5-K, 4SI, 4CB5-S, 4FC-S, 4FC5-S, 7FC-S, i2000, i4000, CFS9112-S, CFS9112-ELXS	4
	BGE-4000R	7SO, ESO	4
	BGE-4200	2H-L, 4C, AC, 7CB5, 7FC5	4
	BGE-4200S	7CB5-K, 7CB5-S, 7FC5-S, 7SI, PBS-400, SPA 400	4
	BGP-1200S	2H0L, 4C, H-104, H-300, H54, AC, S-100, 2CLM-S, OCS2	6
	BGP-1300S	2CB-GW, 2CB5-K, 2CB5-S, BH, BH2	6
	BGP-2000S	N/A	6
	BGP-2200	2FC, 4FC, MC, MC2, XC, XC, XC2	6
	BGP-2200S	2FC-S, 2K Plus, 4FC-S, 4K Plus, 4SI, i2000, i4000	6
	BGP-2300	4CB5	6
	BGP-2300S	4CB5-K, 4CB5-S	6
	BGP-3000R	7SO, ESO	6
	BGP-3200	7TO-BW, 7FC	6
	BGP-3200S	PBS-400, SPA-400	6
	BGP-3300	4FC5	6
	BGP-3300S	4FC5-S	6
	BGC-2000S	CFS-8000S	6
CUNO/3M FOOD SERVICE	BGC-2100	CFS-8110	6
	BGC-2100S	CFS-8110S	6
	BGC-2200	CFS-8112, CFS8112S	6
	BGC-2200S	CFS-8112S, CFS-8112-XS	6
	BGC-2300	CFS-8720	6
	BGC-2300S	CFS-8720S, CFS-517, AP517	6
	BGC-3100S	CFS-8110S	6
	BGC-3200	CFS-8112-EL, CFS-8112-ELX	6
	BGC-3200S	CFS-8112-ELS, CGS-8112-ELXS	6
	BGC-3300	CFS-8720-EL	6
	BGC-3300S	CFS-8720-ELS	6
	NP-217	AP200	24
AQUAPURE	MBG-25098-05	AP110	50
	MBG-25098-50	AP124	50
	SDP-4510	AP817	18
	SDP-4520	AP817-2	9
	ELKAY, HOSHISAKI, OSASIS		
	NP-EWS	Neo-Pure NP-EWS Elkay Compatible	1
	BGH-3200S	HC, HC-H, HCH-CTO, HF, HF-H	4

Aftermarket Filters United Water offers a variety of aftermarket filters to suit your needs and save you money. Aftermarket equivalents are excellent cost saving alternatives to name brand filters. Match the brand and model of the filter you need with our aftermarket offerings and **SAVE!**

SAVE MONEY

WITH AN

AFTERMARKET

EQUIVALENT

FILTER!!

AQUATEK & Other Filter Housings



	MODEL NUMBER	FTP	FLOW RATE*	TEMP. RANGE	PRESSURE RANGE	FILTER SIZE	COLOR	INCLUDES
AQUATEK AT100 SERIES STANDARD DIAMETER HOUSINGS (2.5")								
10"	AT101-C	3/4" FTP	8 gpm	40° - 100° F	25 - 100 psi	2.5" x 10"	Blue Black	Filter Wrench & Mounting Bracket
	AT101T-C	3/4" FTP	8 gpm	40° - 100° F	25 - 100 psi	2.5" x 10"	Clear Black	Filter Wrench & Mounting Bracket
	AT101T-VIH	3/4" FTP	8 gpm	40° - 100° F	25 - 100 psi	2.5" x 10"	Blue Black	Valve in Head, Filter Wrench & Mounting Bracket
20"	AT102-C	3/4" FTP	16 gpm	40° - 100° F	25 - 100 psi	2.5" x 20"	Blue Black	Filter Wrench & Mounting Bracket
AQUATEK AT800 SERIES LARGE DIAMETER HOUSINGS (4.5")								
10"	AT801	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 10"	Black Black	Filter Wrench
	AT801-C	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 10"	Black Black	Filter Wrench & Mounting Bracket
	AT801-CMB	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 10"	Black Black	MB-45097-05 Cartridge, Filter Wrench & Mounting Bracket
	ATC801-C	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 10"	Clear Black	Filter Wrench & Mounting Bracket
20"	AT802	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 20"	Black Black	Filter Wrench
	AT802-C	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 20"	Black Black	Filter Wrench & Mounting Bracket
	ATC802-C	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	4.5" x 20"	Clear Black	Filter Wrench & Mounting Bracket
	AT802-1.5C	1.5" FTP	25 gpm	40° - 100° F	25 - 100 psi	4.5" x 20"	Black Black	Filter Wrench & Mounting Bracket
	ATC802-1.5C	1.5" FTP	25 gpm	40° - 100° F	25 - 100 psi	4.5" x 20"	Clear Black	Filter Wrench & Mounting Bracket
LARGE DIAMETER HIGH TEMPERATURE PLASTIC HOUSINGS (4.5")								
10"	HF5HT-10DRD34	3/4" FTP	8 gpm	40° - 165° F	25 - 125 psi	4.5" x 10"	Red Black	Housing Only
	HF5HT-10DRD10	1" FTP	15 gpm	40° - 165° F	25 - 125 psi	4.5" x 10"	Red Black	Housing Only
20"	HF5HT-20DRD34	3/4" FTP	8 gpm	40° - 165° F	25 - 125 psi	4.5" x 20"	Red Black	Housing Only
	HF5HT-20DRD10	1" FTP	15 gpm	40° - 165° F	25 - 125 psi	4.5" x 20"	Red Black	Housing Only
	HF5HT-20DRD15	1.5" FTP	20 gpm	40° - 165° F	25 - 125 psi	4.5" x 20"	Red Black	Housing Only
LARGE DIAMETER STAINLESS STEEL HOUSINGS (4.5")								
10"	HF4510SS-10	1" FTP	20 gpm	40° - 200° F	25 - 300 psi	4.5" x 10"	Stainless	Mounting Bracket & Ring Nut Tool
20"	HF4520SS-10	1" FTP	20 gpm	40° - 200° F	25 - 300 psi	4.5" x 20"	Stainless	Mounting Bracket & Ring Nut Tool
LARGE DIAMETER BAG FILTER HOUSINGS (4.5")								
20"	ATB20-5	1" FTP	20 gpm	40° - 100° F	25 - 100 psi	Bag Filter	Blue Black	BP420-5 Bag Filter, Mounting Bracket, & Filter Wrench
	ATB20-1.5-5	1.5" FTP	40 gpm	40° - 100° F	25 - 100 psi	Bag Filter	Blue Black	BP420-5 Bag Filter, Mounting Bracket, & Filter Wrench
	BP420-5	N/A	40 gpm	40° - 100° F	25 - 100 psi	-	-	Replacement Bag Filter



Filter Cartridge Options | For Pricing & Models see next page

United Water carries a wide array of water filter cartridges for you choose from. Choosing the right cartridge is fairly simple and the great thing is we have broken it down into two categories: **Sediment** or **Carbon** – making it easier to choose which is best to fix your water quality issues. **Sediment Cartridges** are utilized for reducing silt, dirt, sand, rust & scale particles. **Carbon Cartridges** are utilized for taste & odor issues such as chlorine, musty or off smells, and/or swampy or unpleasant tastes. One other thing to consider is the Micron Rating (μm) which are the average size of the openings between pieces of the filter media represented in microns.

Sediment Cartridges | 3 Tiers of Filtration | DIRT & RUST REDUCTION



MELT BLOWN MB-SERIES | 175° F Max

Offering the highest level of sediment & particulate filtration Melt Blown Cartridges are manufactured from 100% Polypropylene construction offering excellent filtration and good thermal stability. The unique density gradient construction maximizes efficiency and minimizes pressure drop. This filter will not impart taste, odor, or color to the filtered product and has superior chemical resistance for process fluid applications.

APPLICATIONS

- Potable Water
- Pre Filters for Reverse Osmosis Filters
- Home Water Filtration
- Swimming Pools & Hot Tubs



PLEATED PS-SERIES | 180° F Max

The 2nd best option for removing sediment standard Efficiency Pleated filter cartridges are manufactured with special non-cellulose fabric which provides excellent resistance to bacterial and chemical attack. Synthetic polyester fabric pleated around a durable polypropylene core with a long service life and reduced maintenance costs.

APPLICATIONS

- Drinking Water
- Reverse Osmosis Pre-filtration
- Food and Beverage
- Cosmetics
- Electronics
- Chemicals



STRING WOUND SWC-SERIES | 180° F Max

Highly effective in certain applications the 3rd option String Wound Depth Cartridges are made with 100% Polypropylene cord utilizing a precision winding pattern giving them high dirt-holding capacity reducing sand, silt, rust, and scale.

APPLICATIONS

- Water
- Coolants & Cutting Fluids
- Fuels & Light Oil
- Aqueous Solutions
- Water Glycols
- Mineral and Synthetic Oils
- Lubricants & Solvents

Carbon Cartridges | CHLORINE TASTE & ODOR



RADIAL FLOW SDP-SERIES* | 125° F Max

Utilizing Coconut Shell Granular Activated Carbon (GAC), these are ideal for point-of-entry and other high flow rate applications.

CARBON BLOCK CTO/CB-SERIES | 180° F Max

Eco-friendly activated coconut shell carbon filter media to provide purer filtration and high level of chlorine taste and odor reduction

Filtration Replacement Parts Accessories

MODEL NUMBER	DESCRIPTION	CASE
FM-10W	AT101 10" Standard Housing Bracket	1
HF3-ORING	AT101 10" Standard Housing O-Ring	1
FW-1	AT101 10" Standard Housing Wrench	1
FM-20W	AT102 20" Standard Housing Bracket	1
HF5-ORING	AT102 20" Standard Housing O-Ring	1
FW-2	AT102 20" Standard Housing Wrench	1
AT-BBMB	AT800 Series Large Diameter Housing Mounting Bracket & Bolt Kit	1
HF45-ORING	AT800 Series Large Diameter Housing O-Ring	1
FW-3	AT800 Series Large Diameter Housing Filter Wrench	1

Filter Cartridges

	MODEL NUMBER	TYPE	MICRON	LGTH.	DIA.	GPM	DESCRIPTION	CASE
AT100 SERIES COMPATIBLE	MB-25098-05	Sediment	5	10"	2.5"	8	Melt Blown Graded Density - 5 Micron	50
	MB-25098-20	Sediment	20	10"	2.5"	8	Melt Blown Graded Density - 20 Micron	50
	MB-25098-50	Sediment	50	10"	2.5"	8	Melt Blown Graded Density - 50 Micron	50
	MBG-25098-05	Sediment	05	10"	2.5"	8	Melt Blown Grooved - 5 Micron	50
	MBG-25200-05	Sediment	05	20"	2.5"	16	Melt Blown Grooved - 5 Micron	20
	PS-27098-05	Sediment	5	10"	2.5"	8	Pleated Synthetic - 5 Micron	50
	PS-27098-20	Sediment	20	10"	2.5"	8	Pleated Synthetic - 20 Micron	50
	PS-27098-50	Sediment	50	10"	2.5"	8	Pleated Synthetic - 50 Micron	50
	SWC-25-1005	Sediment	5	10"	2.5"	8	String Wound - 5 Micron	50
	SWC-25-1020	Sediment	20	10"	2.5"	8	String Wound - 20 Micron	50
	SWC-25-1050	Sediment	50	10"	2.5"	8	String Wound - 50 Micron	50
	SWC-25-2005	Sediment	5	20"	2.5"	16	String Wound - 5 Micron	20
	SWC-25-2020	Sediment	20	20"	2.5"	16	String Wound - 20 Micron	20
	SWC-25-2050	Sediment	50	20"	2.5"	16	String Wound - 50 Micron	20
	HDG-P117	Carbon Sediment	5	10"	2.5"	6	Radial Flow Carbon - 5 Micron - 6,000 Gal. Capacity	20
	CB-25-1005	Carbon Sediment	5	10"	2.5"	2	Block Carbon - 5 Micron - 6,000 Gal. Capacity	20
AT800 SERIES COMPATIBLE	SMCB-2510	Carbon Sediment	0.5	10"	2.5"	2	Block Carbon - .05 Micron - 10,000 Capacity - Cyst Reduction	20
	CB-25-2005	Carbon Sediment	5	20"	2.5"	2	Block Carbon - 5 Micron - 9,000 Gal. Capacity	20
	MB-45098-05	Sediment	5	10"	4.5"	20	Melt Blown Graded Density - 5 Micron	18
	MB-45098-25	Sediment	25	10"	4.5"	20	Melt Blown Graded Density - 25 Micron	18
	MB-45098-50	Sediment	50	10"	4.5"	20	Melt Blown Graded Density - 50 Micron	18
	MB-45200-05	Sediment	5	20"	4.5"	40	Melt Blown Graded Density - 5 Micron	9
	MB-45200-25	Sediment	25	20"	4.5"	40	Melt Blown Graded Density - 25 Micron	9
	MBG-45098-05	Sediment	5	10"	4.5"	20	Melt Blown Grooved - 5 Micron	18
	PS-45098-05	Sediment	5	10"	4.5"	20	Pleated Synthetic - 5 Micron	18
	PS-45098-20	Sediment	20	10"	4.5"	20	Pleated Synthetic - 20 Micron	18
	PS-45088-50	Sediment	50	10"	4.5"	20	Pleated Synthetic - 50 Micron	18
	PS-45200-05	Sediment	5	20"	4.5"	40	Pleated Synthetic - 5 Micron	9
	PS-45200-20	Sediment	20	20"	4.5"	40	Pleated Synthetic - 20 Micron	9
	PS-45200-50	Sediment	50	20"	4.5"	40	Pleated Synthetic - 50 Micron	9
	SWC-45-1005	Sediment	5	10"	4.5"	20	String Wound - 5 Micron	6
	SWC-45-1020	Sediment	20	10"	4.5"	20	String Wound - 20 Micron	6
	SWC-45-1050	Sediment	50	10"	4.5"	20	String Wound - 50 Micron	6
	SDP-4510	Carbon Sediment	10	10"	4.5"	10	Radial Flow Carbon - 25 Micron - 50,000 Gal. Capacity	18
	SDP-4520	Carbon Sediment	10	20"	4.5"	10	Radial Flow Carbon - 25 Micron - 100,000 Gal. Capacity	9
	CB-45-1001	Carbon Sediment	5	10"	4.5"	3	Block Carbon - 5 Micron - 12,000 Gal. Capacity	9
	CB-45-2005	Carbon Sediment	5	20"	4.5"	3	Block Carbon - 5 Micron - 26,000 Gal. Capacity	4
	SMCB-4510	Carbon Sediment	0.5	10"	4.5"	2	Block Carbon - .05 Micron - 50,000 Capacity - Cyst Reduction	9
	SMCB-4520	Carbon Sediment	0.5	20"	4.5"	2	Block Carbon - .05 Micron - 100k Capacity - Cyst Reduction	4



UNITED WATER COMMERCIAL & INDUSTRIAL

United Water offers a large line-up of heavy-duty water filtration & treatment options that are designed for commercial and industrial applications. We are here to help you find the best systems for your needs. In addition to our standard available products we also offer expert custom design to ensure you install the perfect system tailored specifically to your needs.

Choosing the correct system can be a complex task and we are here to help provide you with the information you need to make the right choice for any commercial and industrial application. **Call 877-414-7873**



INDUSTRIES:

- HOSPITALITY
- FOOD & BEVERAGE
- WINERIES, BREWING FACILITIES, DISTILLERIES
- HOSPITALS & MEDICAL LABORATORIES
- APARTMENTS, RETIREMENT HOMES, LARGE RESIDENTIAL FACILITIES
- SCHOOLS & UNIVERSITIES
- MANUFACTURING
- RESORTS & HOTELS
- AGRICULTURE
- BIO-TECH
- MUNICIPAL WATER SYSTEMS

COMPLETED INSTALLS & JOBS

2020	AT450-956TA Twin Alternating Water Softener 450,000 Grain Capacity	Public School Idaho Falls, ID
2020	AT300-956SM Single Metered Water Softener 300,000 Grain Capacity	Apartment Complex Turlock, CA
2020	Hydro Scientific MRH-3640-6FL Stainless Housing	Food Processing Facility Sparks, NV
2020	AT450-956SM Single Metered Water Softener 450,000 Grain Capacity	Apartment Complex The Dalles, OR
2019	AT210-954SM Single Metered Water Softener 210,000 Grain Capacity ATAIOF-7.0-1.5 Aquatek 7cu. ft. Iron Filter SC40SB Sciclone Swing Bolt Jumbo Housing w/HSC-40-5 Cartridge	Walker River State Recreation Area Independence, CA
2019	AT450-959TA Twin Alternating Water Softener 450,000 Grain Capacity	Independence Hotel Independence, OR
2019	AT300-959SM Single Metered Water Softener 450,000 Grain Capacity	Assisted Living Facility Pasco, WA
2018	AT450-959SM Single Metered Water Softener 450,000 Grain Capacity	Hotel Auburn, CA
2018	AT450-956TA Twin Alternating Water Softener 450,000 Grain Capacity	New Hotel Nevada, CA

AQUATEK AT-Series Commercial Media Filters



- Features**
- Four solid state microprocessors
 - Fully adjustable cycle sequencing controller
 - Coin cell lithium battery back-up with 24 hour carry over

Aquatek ATAIOF Series Filters reduce Iron, Hydrogen Sulfide (sulfur) & Manganese "All In One" filtration system. All natural and chemical free media bed provides excellent depth filtration of precipitated iron while increasing pH to enhance iron reduction performance. These systems utilize an air chamber within the tank to oxidize and capture the elements before filtering through the media bed.

AQUATEK ATAIOF SERIES COMMERCIAL IRON FILTER SYSTEMS

Maximum Iron (Fe): 20 PPM | Max. Hydrogen Sulfide: 2 PPM

MODEL NUMBER	PIPE SIZE	FLOW RATE		CUBIC FT. MEDIA	BACKWASH RATE	PSI RANGE	ELEC-TRICAL	TANK SIZE	WT.
		12-20 GPM/ FT2	CONTINUOUS FLOW*						
ATAIOF-3.0-1.5	1.5"	13-20 gpm	10 gpm	3 cu. ft. Zeolite	10	40-100	120v 60Hz	14 x 65	300lbs
ATAIOF-5.0-1.5	1.5"	20-30 gpm	13 gpm	5 cu. ft. Zeolite	15	40-100	120v 60Hz	18 x 65	400lbs
ATAIOF-7.0-1.5	1.5"	30-40 gpm	15 gpm	7 cu. ft. Zeolite	17	40-100	120v 60Hz	21 x 62	600lbs
ATAIOF-10.0-1.5	1.5"	40-50 gpm	17 gpm	10 cu. ft. Zeolite	35	40-100	120v 60Hz	24 x 72	825lbs
ATAIOF-3.0-2.0	2.0"	13-20 gpm	10 gpm	3 cu. ft. Zeolite	10	40-100	120v 60Hz	14 x 65	300lbs
ATAIOF-5.0-2.0	2.0"	20-30 gpm	13 gpm	5 cu. ft. Zeolite	15	40-100	120v 60Hz	18 x 65	400lbs
ATAIOF-7.0-2.0	2.0"	30-40 gpm	15 gpm	7 cu. ft. Zeolite	17	40-100	120v 60Hz	21 x 62	600lbs
ATAIOF-10.0-2.0	2.0"	40-50 gpm	17 gpm	10 cu. ft. Zeolite	35	40-100	120v 60Hz	24 x 72	825lbs

AQUATEK ATCBF SERIES COMMERCIAL CARBON FILTER SYSTEMS

Aquatek ATCBF Backwashing water filters are highly versatile tank & valve style filters which, depending on desired results and media choice, can provide a wide variety treatment options. Backwashing consists of reversing the flow of water so that it enters from the bottom of the filter bed, lifts and rinses the bed, then exits through the top of the filter tank. Aquatek backwashing filter control valves and media tanks are programmed filled to desired customer needs (see *Filtration Media Options* below).

	MODEL NUMBER	PIPE SIZE	FLOW RATE		CUBIC FT. MEDIA	BACKWASH RATE	PSI RANGE	ELEC-TRICAL	TANK SIZE	WT.
			12-20 GPM/ FT2	CONTINUOUS FLOW*						
COCONUT SHELL CARBON	ATCBF-3.0-1.5-C	1.5"	10-20 gpm	10 gpm	3 cu. ft. Coconut	17	40-100	120v 60Hz	14 x 65	300lbs
	ATCBF-5.0-1.5-C	1.5"	12-25 gpm	25 gpm	5 cu. ft. Coconut	25	40-100	120v 60Hz	18 x 65	400lbs
	ATCBF-7.0-1.5-C	1.5"	15-30 gpm	15 gpm	7 cu. ft. Coconut	48	40-100	120v 60Hz	21 x 62	600lbs
	ATCBF-10.0-1.5-C	1.5"	35-70 gpm	35 gpm	10 cu. ft. Coconut	70	40-100	120v 60Hz	24 x 72	825lbs
	ATCBF-3.0-2.0-C	2.0"	10-20 gpm	10 gpm	3 cu. ft. Coconut	17	40-100	120v 60Hz	14 x 65	300lbs
	ATCBF-5.0-2.0-C	2.0"	12-25 gpm	25 gpm	5 cu. ft. Coconut	25	40-100	120v 60Hz	18 x 65	400lbs
	ATCBF-7.0-2.0-C	2.0"	15-30 gpm	15 gpm	7 cu. ft. Coconut	48	40-100	120v 60Hz	21 x 62	600lbs
	ATCBF-10.0-2.0-C	2.0"	35-70 gpm	35 gpm	10 cu. ft. Coconut	70	40-100	120v 60Hz	24 x 72	825lbs
CENTAUR CARBON	ATCBF-3.0-1.5-CC	1.5"	10-20 gpm	10 gpm	3 cu. ft. Centaur	17	40-100	120v 60Hz	14 x 65	300lbs
	ATCBF-5.0-1.5-CC	1.5"	12-25 gpm	25 gpm	5 cu. ft. Centaur	25	40-100	120v 60Hz	18 x 65	400lbs
	ATCBF-7.0-1.5-CC	1.5"	15-30 gpm	15 gpm	7 cu. ft. Centaur	48	40-100	120v 60Hz	21 x 62	600lbs
	ATCBF-10.0-1.5-CC	1.5"	35-70 gpm	35 gpm	10 cu. ft. Centaur	70	40-100	120v 60Hz	24 x 72	825lbs
	ATCBF-3.0-2.0-CC	2.0"	10-20 gpm	10 gpm	3 cu. ft. Centaur	17	40-100	120v 60Hz	14 x 65	300lbs
	ATCBF-5.0-2.0-CC	2.0"	12-25 gpm	25 gpm	5 cu. ft. Centaur	25	40-100	120v 60Hz	18 x 65	400lbs
	ATCBF-7.0-2.0-CC	2.0"	15-30 gpm	15 gpm	7 cu. ft. Centaur	48	40-100	120v 60Hz	21 x 62	600lbs
	ATCBF-10.0-2.0-CC	2.0"	35-70 gpm	35 gpm	10 cu. ft. Centaur	70	40-100	120v 60Hz	24 x 72	825lbs



AQUATEK AT-Series Commercial Water Softeners

Commercial Single Metered Softener Systems



Features

- Four methods to initiate regeneration; meter immediate or delayed, time delayed or pressure differential
- Fully adjustable cycle sequencing controller
- Electronic microprocessor tracks system water usage daily and automatically adjusts to meet demand

MODEL NUMBER	PIPE SIZE	GRAIN CAPACITY		FLOW RATE (GPM) ¹		TANK SIZES		MINERAL QTY. (CU/FT)	SALT CAP. (LBS)	BACK-WASH RATE
		MAX @ 15LBS PER CU/FT	MAX @ 6LBS PER CU/FT	CONT. @ 15PSI DROP	PEAK @ 25PSI DROP	MINERAL TANK	BRINE TANK			
AT90-954SM	1.5"	90,000	60,000	33	42	14 x 65	18 x 40	3.0	340	4.2
AT120-954SM	1.5"	120,000	80,000	36	50	16 x 65	18 x 40	4.0	590	5.3
AT150-954SM	1.5"	150,000	100,000	40	57	18 x 65	24 x 50	5.0	900	7.0
AT180-954SM	1.5"	180,000	120,000	44	60	21 x 62*	24 x 50	6.0	900	10.0
AT210-954SM	1.5"	210,000	180,000	43	58	21 x 62*	24 x 50	7.0	900	10.0
AT300-954SM	1.5"	300,000	200,000	45	60	24 x 72*	30 x 50	10.0	1200	12.0
AT90-956SM	2"	90,000	60,000	39	50	14 x 65	18 x 40	3.0	340	4.2
AT120-956SM	2"	120,000	80,000	47	60	16 x 65	18 x 40	4.0	590	5.3
AT150-956SM	2"	150,000	100,000	53	69	18 x 65	24 x 50	5.0	900	7.0
AT180-956SM	2"	180,000	120,000	70	91	21 x 62*	24 x 50	6.0	900	10.0
AT210-964SM	2"	210,000	180,000	66	85	21 x 62*	24 x 50	7.0	900	10.0
AT300-956SM	2"	300,000	200,000	73	94	24 x 72*	30 x 50	10.0	1200	12.0
AT450-956SM	2"	450,000	300,000	84	109	30 x 72*	39 x 48	15.0	1510	20.0
AT600-956SM	2"	600,000	400,000	93	119	36 x 72*	39 x 60	20.0	1870	30.0
AT750-956SM	2"	750,000	500,000	98	127	42 x 72*	39 x 60	25.0	1660	35.0
AT900-956SM	2"	900,000	600,000	95	123	42 x 72*	42 x 60	30.0	1930	35.0
AT1050-956SM	2"	1,050,000	700,000	100	129	48 x 72*	42 x 60	35.0	1750	45.0
AT1200-956SM	2"	1,200,000	800,000	98	127	48 x 72*	50 x 60	40.0	2730	45.0
AT300-959SM	3"	300,000	200,000	98	126	24 x 72*	30 x 50	10.0	1200	12.0
AT450-959SM	3"	450,000	300,000	144	186	30 x 72*	39 x 48	15.0	1510	20.0
AT600-959SM	3"	600,000	400,000	172	222	36 x 72*	39 x 60	20.0	1870	30.0
AT750-959SM	3"	750,000	500,000	190	244	42 x 72*	39 x 60	25.0	1660	35.0
AT900-959SM	3"	900,000	600,000	176	265	42 x 72*	42 x 60	30.0	1930	35.0
AT1050-956SM	3"	1,050,000	700,000	194	251	48 x 72*	42 x 60	35.0	1750	45.0
AT1200-956SM	3"	1,200,000	800,000	98	127	48 x 72*	50 x 60	40.0	2730	45.0

NOTES:

¹ - Quality of water may vary depending on flow rate and water conditions

* - These systems are also available with the following tank options: Steel non-code pressure vessels, Fibreglass ASME-code vessels & Steel ASME-code vessels.

COMMERCIAL TWIN ALTERNATING CONTINUOUS FLOW SOFTENER SYSTEMS



Features

- Four methods to initiate regeneration; meter immediate or delayed, time delayed or pressure differential
- Fully adjustable cycle sequencing controller
- Electronic microprocessor tracks system water usage daily and automatically adjusts to meet demand

MODEL NUMBER	PIPE SIZE	GRAIN CAPACITY		FLOW RATE (GPM) ¹		TANK SIZES		MINERAL QTY. (CU/FT)	SALT CAP. (LBS)	BACK-WASH RATE
		MAX @ 15LBS PER CU/FT	MAX @ 6LBS PER CU/FT	CONT. @ 15PSI DROP	PEAK @ 25PSI DROP	MINERAL TANK	BRINE TANK			
AT90-954TA	1.5"	90,000	60,000	33	42	14 x 65	18 x 40	3.0	340	4.2
AT120-954TA	1.5"	120,000	80,000	36	50	16 x 65	18 x 40	4.0	590	5.3
AT150-954TA	1.5"	150,000	100,000	40	57	18 x 65	24 x 50	5.0	900	7.0
AT180-954TA	1.5"	180,000	120,000	44	60	21 x 62*	24 x 50	6.0	900	10.0
AT210-954TA	1.5"	210,000	180,000	43	58	21 x 62*	24 x 50	7.0	900	10.0
AT300-954TA	1.5"	300,000	200,000	45	60	24 x 72*	30 x 50	10.0	1200	12.0
AT90-956TA	2"	90,000	60,000	39	50	14 x 65	18 x 40	3.0	340	4.2
AT120-956TA	2"	120,000	80,000	47	60	16 x 65	18 x 40	4.0	590	5.3
AT150-956TA	2"	150,000	100,000	53	69	18 x 65	24 x 50	5.0	900	7.0
AT180-956TA	2"	180,000	120,000	70	91	21 x 62*	24 x 50	6.0	900	10.0
AT210-964TA	2"	210,000	180,000	66	85	21 x 62*	24 x 50	7.0	900	10.0
AT300-956TA	2"	300,000	200,000	73	94	24 x 72*	30 x 50	10.0	1200	12.0
AT450-956TA	2"	450,000	300,000	84	109	30 x 72*	39 x 48	15.0	1510	20.0
AT600-956TA	2"	600,000	400,000	93	119	36 x 72*	39 x 60	20.0	1870	30.0
AT750-956TA	2"	750,000	500,000	98	127	42 x 72*	39 x 60	25.0	1660	35.0
AT900-956TA	2"	900,000	600,000	95	123	42 x 72*	42 x 60	30.0	1930	35.0
AT1050-956TA	2"	1,050,000	700,000	100	129	48 x 72*	42 x 60	35.0	1750	45.0
AT1200-956TA	2"	1,200,000	800,000	98	127	48 x 72*	50 x 60	40.0	2730	45.0
AT300-959TA	3"	300,000	200,000	98	126	24 x 72*	30 x 50	10.0	1200	12.0
AT450-959TA	3"	450,000	300,000	144	186	30 x 72*	39 x 48	15.0	1510	20.0
AT600-959TA	3"	600,000	400,000	172	222	36 x 72*	39 x 60	20.0	1870	30.0
AT750-959TA	3"	750,000	500,000	190	244	42 x 72*	39 x 60	25.0	1660	35.0
AT900-959TA	3"	900,000	600,000	176	265	42 x 72*	42 x 60	30.0	1930	35.0
AT1050-956TA	3"	1,050,000	700,000	194	251	48 x 72*	42 x 60	35.0	1750	45.0
AT1200-956TA	3"	1,200,000	800,000	98	127	48 x 72*	50 x 60	40.0	2730	45.0

NOTES:

1 - Quality of water may vary depending on flow rate and water conditions

* - These systems are also available with the following tank options: Steel non-code pressure vessels, Fibreglass ASME-code vessels & Steel ASME-code vessels.



AQUATEK ATRO-Series Commercial Reverse Osmosis Systems

ATRO-600G & ATRO-300G Reverse Osmosis Systems



Features


- Light weight, heavy duty power coated aluminium frame.
- Assembled with NSF Certified Filters, Tubing, Fittings and Membrane
- Space saving design.
- 300 GPD TFC Membrane element. (2 with ATRO-600G)
- Pressure Gauge for pre filter pressure monitoring. • Floor or wall mountable.
- AQUATROL 36V Pump. (2 with ATRO-600g)

Aquatek ATRO-300/600G Commercial RO System keeps your drinking water clean and safe and reduces the levels of lead, nitrates, cysts (cryptosporidium, giardia), arsenic, sodium and other contaminants commonly found in unfiltered water. The easy to install system comes with everything you need. These high capacity units are available in both 300 gallon per day (gpd) and 600 gpd models.

REVERSE OSMOSIS (RO) is one of the most convenient and economical methods of reducing unwanted contaminants in your drinking water. These systems have the ability to provide up to 600 gallons per day (GPD) of clean, clear, refreshing drinking water for light commercial use.

REVERSE OSMOSIS is the process by which water molecules are forced by water pressure through a semipermeable membrane, and causing most of the impurities and other contaminants to be rinsed to the drain while the refined water is routed to a special holding tank. The Thin Film Composite (TFC) reverse osmosis membrane rejects a high percentage of impurities to bring you the most advanced RO technology at an affordable price

Flow Characteristics ATRO-600G

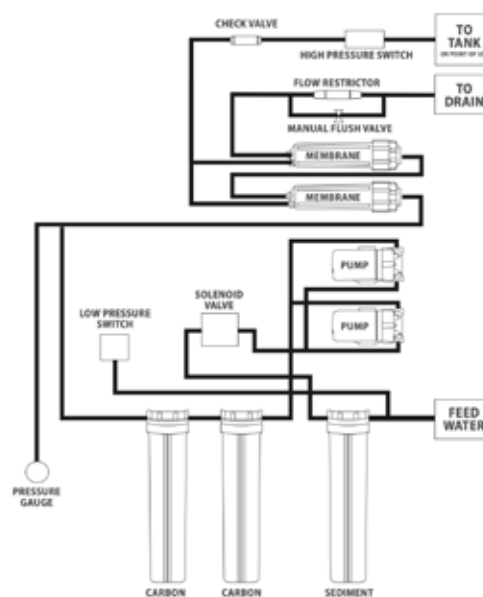

MODEL NUMBER	DAILY PRODUCTION RATE	RECOVERY RATE (PRODUCT WASTE RATIO)	MAX. HARDNESS	TEMP RANGE	SALT REJECTION	PSI	PH RANGE	TDS
ATRO-300G	300 GPD	1:4	< 120 PPM (7 GPG)	40° - 100° F	98%	120	3 - 11	< 1500PPM
ATRO-600G	600 GPD	1:4	< 120 PPM (7 GPG)	40° - 100° F	98%	120	3 - 11	< 1500PPM

Tritton IXC-Series Commercial Reverse Osmosis Systems



Features

- Systems come ready to be placed into immediate operation with no programming needed
- TDS on Display – Shows the quality of product water in TDS PPM being obtained at that time.
- Multiple membrane options are available
- Modifying an IXC system by adding additional membranes is simple and a value added solution for customers who might outgrow their system

The TRITTON IXC RO Systems are designed to operate with high productivity, automatic operation and low maintenance. Built in a vertical module using cutting-edge technology materials and accessories at a lower investment cost that will give a greater competitive advantage.

Multiple membrane options, make it a versatile system in the range of flow from 2,100 to 9,600 GPD and with 99% rejection of minerals.

MODEL NUMBER	GALLONS PER DAY	PROD-UCT	FEED FLOW	RECOVERY %	PRESSURE PUMP	CONNECTIONS			ELEC.	SYS. DIM.
						INLET	PRODUCTION OUTLET	WASTE OUTLET		
ROA-IXC-ISS-B	2,100-2,400*	1.45-1.6	5 gpm	50-60%	1.5 HP	3/4"	1/2"	1/2"	120/220v	20 x 20 x 47
ROA-IXC-2SS-B	4,200-4,800*	2.9-3.2	8 gpm	50-60%	1.5 HP	3/4"	1/2"	1/2"	120/220v	20 x 20 x 47
ROA-IXC-3SS-B	6,300-7,200*	4.3-4.8	10 gpm	50-60%	1.5 HP	1"	3/4"	3/4"	120/220v	25 x 20 x 47
ROA-IXC-4SS-B	8,400-9,600*	5.8-6.4	20 gpm	50-60%	3.0 HP	1"	3/4"	3/4"	220v	25 x 20 x 47

* The system production rate is based on minimum feed water quality below 1,000 PPM, feed water temp 77 °F, and SDI < 5. Use a suitable pretreatment capable of removing all membrane damaging substances.

TRITTON ROS-IXC-850 Compact RO System

The TRITTON IXC 850 designed to be highly productive, easily maintained & operated, with all the quality of the IXC-series in a compact & affordable version. With its horizontal membrane design combines high quality components and accessories while keeping in mind the importance of cost to benefit ratio.

Although light weight and compact, IXC-850's have been designed for ease of maintenance and installation. They offer a high performance, low pressure Hydron™ membrane for 98% rejection and a production range of 850 – 1000 gpd*.

Tritton IXC 850 reverse osmosis systems are ideal for diverse applications and can be used for restaurants, coffee shops, ice machines, food & beverages, laboratories, water for steam generators to name a few.



MODEL NUMBER	DAILY PRODUCTION RATE	MEMBRANE	OPERATING PRESSURE	CAPACITY ROTARY PUMP	IN/OUT CONNEC-TION	ELEC.	Sys. DIM.
ROS-IXC-805	850-1000*	4" x 21" (1)	100-150psi	100 gph	1/2"	120V/60Hz	26 x 23 x 20

* Depending on feed water characteristics through the 4 stages of filtration. The system production rate is based on minimum feed water quality below 1,000 PPM, < 300 PPM hardness, feed water temp 77 °F, and SDI < 5.

Commercial Storage Tanks



MODEL NUMBER	CAPACITY	TANK DIMS.	DESCRIPTION
ST-100	100 gallons	28 x 43	100gal Atmospheric Storage Tank
ST-200	200 gallons	30 x 72	200gal Atmospheric Storage Tank
ST-500	500 gallons	48 x 73	500gal Atmospheric Storage Tank
ARO-821-B10	2 gallons	8 x 11.4	2gal Inline Pressure Tank 1" NPT 150 psi max
ARO-1845I-B10	4.5 gallons	11 X 15.4	4.5gal Inline Pressure Tank 1" NPT 150 psi max
ARO-3810I-B10	10 gallons	11.6 x 21.7	10gal Inline Pressure Tank 1" NPT 150 psi max
ARO-5814V-B10	14 gallons	15 x 23.6	14gal Vertical Pressure Tank 1" NPT 150 psi max
ARO-8020V-B10	20 gallons	15 x 30.7	20gal Vertical Pressure Tank 1" NPT 150 psi max
ARO-12032V-B10	32 gallons	15 x 44	32gal Vertical Pressure Tank 1" NPT 150 psi max
ARO-13034V-B114	34 gallons	22 x 29.5	34gal Vertical Pressure Tank 1 1/4" NPT 150 psi max
ARO-16044V-B114	44 gallons	22 x 45.7	44gal Vertical Pressure Tank 1 1/4" NPT 150 psi max
ARO-30582V-B114	82 gallons	22 x 57.1	82gal Vertical Pressure Tank 1 1/4" NPT 150 psi max
ARO-450120V-B114	120 gallons	25.6 x 55.2	120gal Vertical Pressure Tank 1 1/4" NPT 150 psi max

Stainless Steel Commercial Filter Housings

HydroScientific™ BF-Series Swing Bolt Bag Filter Housings

HYDROSCIENTIFIC™ BF SERIES BAG FILTER HOUSINGS are ideal for most commercial / industrial applications. Commonly used for pre-filtration for Reverse Osmosis (RO) systems, food service, car washes, agriculture and many other uses.

HYDROSCIENTIFIC™ BF SERIES BAG FILTER HOUSINGS are made with high grade 304 or 316 Stainless Steel and easily accept most standard filter bags. With a wide range of models, these housings can easily meet most application requirements

Features

- 304 or 316 Stainless Steel
- Positive O-Ring Seal
- Electropolish standard on all models
- Accepts #1 (7" x 16.5") or #2 (7" x 32") Filter Bags
- 150 PSI Pressure Rating



Max. Pressure: 150 psi at 300 °F | Max. Temp. 300 °F

MODEL NUMBER	DESCRIPTION	IN / OUT	VENTS	GAUGE PORT	MAX FLOW
BF1-304-2N	304 Stainless SB Single Bag Filter Housing 1 x #1, AL, EP	2" FNPT	1/4" FNPT	14" FNPT	90 gpm
BF2-304-2N	304 Stainless SB Single Bag Filter Housing 1 x #2, AL, EP	2" FNPT	1/4" FNPT	14" FNPT	180 gpm
BF1-316-2N	316 Stainless SB Single Bag Filter Housing 1 x #1, AL, EP	2" FNPT	1/4" FNPT	14" FNPT	90 gpm
BF2-316-2N	316 Stainless SB Single Bag Filter Housing 1 x #2, AL, EP	2" FNPT	1/4" FNPT	14" FNPT	180 gpm

Stainless Steel Commercial Filter Housings Cont.

HydroScientific™ MRH/MRHS-Series Swing Bolt Housings

HYDROSCIENTIFIC™ MRH / MRHS SERIES – SWING BOLT MULTI ROUND FILTER HOUSINGS are ideal for most industrial/commercial applications with our welded leg design as a standard, (not “optional”) feature, we eliminate the added expense to your application. MRH/MRHS Swing Bolt Multi Round Housings are commonly used for pre- filtration for Reverse Osmosis (RO) systems, food service, car washes, agriculture and many other uses. HYDROSCIENTIFIC™ MRH / MRHS SERIES – SWING BOLT MULTI ROUND FILTER HOUSINGS are made with a high grade 304 or 316 Stainless Steel as standard and accept a wide range of filter cartridges.

APPLICATIONS

- Residential, Commercial, Industrial, and Municipal
- Reverse Osmosis Pre-filtration
- Ground Water Remediation
- Industrial Process (High Purity) Applications
- Cooling Tower Filtration
- Process Water
- Industrial Waste Water Treatment

Max. Pressure: 150 psi at 300 °F | Max. Temp. 300 °F

Features

- Electropolished/Glass Bead 304 or 316 Stainless Steel.
- Swing Bolt Design for Safe/Easy Operation.
- Accepts DOE, 222/Flat or 222/Fin Cartridges.
- Heavy duty legs included on all models.
- Vented lid and Clean and Dirty Drains on all models.
- Two gauge ports on inlet and outlet on all models.
- Flow rates up to 2,380 gpm - 9,009 lpm - 649 m³/hr.



MODEL NUMBER	DESCRIPTION	IN / OUT	DRAINS	GAUGE PORT	MAX FLOW	NO. OF CARTRIDGES
MRH-420-2	304 Stainless SB 4 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	56 gpm	4
MRH-430-2	304 Stainless SB 4 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	84 gpm	4
MRH-440-2	304 Stainless SB 4 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	112 gpm	4
MRH-520-2	304 Stainless SB 5 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	70 gpm	5
MRH-530-2	304 Stainless SB 5 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	105 gpm	5
MRH-540-2	304 Stainless SB 5 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	140 gpm	5
MRH-720-2	304 Stainless SB 7 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	98 gpm	7
MRH-730-2	304 Stainless SB 7 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	147 gpm	7
MRH-740-2	304 Stainless SB 7 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	196 gpm	7
MRHS-420-2	316 Stainless SB 4 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	56 gpm	4
MRHS-430-2	316 Stainless SB 4 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	84 gpm	4
MRHS-440-2	316 Stainless SB 4 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	112 gpm	4
MRHS-520-2	316 Stainless SB 5 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	70 gpm	5
MRHS-530-2	316 Stainless SB 5 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	105 gpm	5
MRHS-540-2	316 Stainless SB 5 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	140 gpm	5
MRHS-720-2	316 Stainless SB 7 x 20" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	98 gpm	7
MRHS-730-2	316 Stainless SB 7 x 30" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	147 gpm	7
MRHS-740-2	316 Stainless SB 7 x 40" Multi Filter Housing, ML, EP	2" FNPT	3/4" MNPT	1/4" FNPT	196 gpm	7

MRH/MRHS-Series Cartridge Options

MODEL NUMBER	TYPE	MICRON	LGTH.	DIA.	CASE
HDG P117	Radial Flow Carbon	5	10"	2.5"	
SGC-25-2005	Melt Blown Sediment Grooved	5	20"	2.5"	
SGC-25-3005	Melt Blown Sediment Grooved	5	30"	2.5"	
CB-25-1005	Carbon Block	5	10"	2.5"	20
CB-25-2005	Carbon Block	5	20"	2.5"	20



HydroScientific™ SCICLONE SC-Series Housings

HYDROSCIENTIFIC SCICLONE™ SERIES SS FILTER HOUSING provide an exceptional performance housing design that helps separate dense solids prior to water passing through the filter cartridge. This SCICLONICTM design delivers extended filter life, low cost operation, increased dirt holding capacity and reduced maintenance costs.

HYDROSCIENTIFIC SCICLONE™ SERIES SS FILTER HOUSING come with Stainless Steel standpipes as a standard feature and through their SCICLONICTM radial flow water entry, water enters the housing to create a cyclonic effect to prevent air entrapment and force water more effectively through the cartridges pleated filter media.

APPLICATIONS

- Residential, Commercial, Industrial and Municipal
- Cooling Tower Filtration
- Whole House Filtration
- Process Water
- Well Water
- Small Community Compliance
- Industrial Waste Water Treatment

Features

- SCICLONICTM Water Flow Design.
- Swing bolt closure for quick and secure filter change.
- Heavy duty 304 or 316 Stainless Steel for durability available.
- Legs and Electropolish are standard.
- Accepts Jumbo Style Cartridges.
- Radial Flow Entry.
- Stainless Steel Standpipes.



Max. Pressure: 150 psi at 300 °F | Max. Temp. (Housing Only) 250 °F

MODEL NUMBER	DESCRIPTION	IN / OUT	DRAINS	MAX FLOW
SC40SB	304 Stainless Sciclone Swing Bolt 40 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	50 gpm
SC90SB	304 Stainless Sciclone Swing Bolt 90 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	100 gpm
SC170SB	304 Stainless Sciclone Swing Bolt 170 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	150 gpm
SC40SB-316	316 Stainless Sciclone Swing Bolt 40 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	50 gpm
SC90SB-316	316 Stainless Sciclone Swing Bolt 90 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	100 gpm
SC170SB-316	316 Stainless Sciclone Swing Bolt 170 Single Jumbo Filter Housing ML, GP, EP	2" FNPT	3/4" FNPT	150 gpm

HydroScientific™ HSBJ-Series Housings

HYDROSCIENTIFIC™ SWING BOLT JUMBO FILTER HOUSINGS provide an exceptional performance that delivers durability, quality and price.

HYDROSCIENTIFIC™ SWING BOLT JUMBO FILTER HOUSINGS come with Stainless Steel standpipes as a standard feature and through their JUMBO radial flow water entry, water enters the housing and forces water more effectively through the cartridges pleated filter media.

FEATURES:

Available in either 304 or 316 Stainless Steel. Electropolished standard on all models. Swing Bolt Design for fast and easy operation. Stainless steel stand pipe. Multiple sizing options to best meet your needs.



Max. Pressure: 150 psi at 300 °F | Max. Temp. (Housing Only) 250 °F

MODEL NUMBER	DESCRIPTION	IN / OUT	DRAINS	VENTS	MAX FLOW
HSBJ40	304 Stainless SB 40 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	50 gpm
HSBJ90	304 Stainless SB 90 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	100 gpm
HSBJ170	304 Stainless SB 170 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	150 gpm
HSBJ40-316	316 Stainless SB 40 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	50 gpm
HSBJ90-316	316 Stainless SB 90 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	100 gpm
HSBJ170-316	316 Stainless SB 170 Jumbo Filter Housing ML, GP, EP	2" FNPT	1" FNPT	1/4"	150 gpm

HSC Jumbo High-Flow Filter Cartridge Options

HYDROSCIENTIFIC™ PLEATED JUMBO CARTRIDGES

are high flow performance cartridges designed to meet and exceed operational requirements in high flow applications. Their 100% Polyester material is ideal for almost every application where a rugged, cleanable and reusable cartridge is required.

HYDROSCIENTIFIC™ PLEATED JUMBO CARTRIDGES

deliver high flow capability while reducing filter change-outs due to their high dirt holding capacity and increased particle removal. HSC Series Cartridges are surfactant and binder free, incorporate a built-in seal and are available in a wide range of sizes and micron ratings.



MODEL NUMBER	DESCRIPTION	FILTER LENGTH	NOMI- NAL MICRON RATING	RCMD. FLOW RATE (GPM)	MAX FLOW RATE (GPM)
HSC-40-0.35-PP	Polypropylene Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	0.35	35	50
HSC-40-1	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	1	35	50
HSC-40-5	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	5	35	50
HSC-40-10	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	10	35	50
HSC-40-20	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	20	35	50
HSC-40-50	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 5/8"	9 5/8"	50	35	50
HSC-90-0.35-PP	Polypropylene Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	0.35	70	100
HSC-90-1	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	1	70	100
HSC-90-5	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	5	70	100
HSC-90-10	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	10	70	100
HSC-90-20	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	20	70	100
HSC-90-50	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 9 1/2"	9 1/2"	50	70	100
HSC-170-0.35-PP	Polypropylene Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	0.35	105	150
HSC-170-1	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	1	105	150
HSC-170-5	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	5	105	150
HSC-170-10	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	10	105	150
HSC-170-20	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	20	105	150
HSC-170-50	Pleated Synthetic Jumbo Cartridge, 7 3/4" x 30 3/4"	30 3/4"	50	105	150



United Water Inc.

TERMS AND CONDITIONS OF SALE – 2022

1. ORDERS AND CONTRACTS: Any statement in an order of contract which modifies United Water Inc. (UWI) Terms and Conditions as set forth here, must first be accepted in writing by UWI. UWI reserves the right to correct clerical or technical errors in documents.

2. PRICES: All prices are \$USD F.O.B. our warehouse. Taxes extra. Prices are subject to change without notice. All shipments will be invoiced at prices in effect on date order is placed. All orders accepted subject to credit terms and limits. Past due invoices subject to service charge of 1.5% per month.

3. FOB POINT: Vancouver WA. Unless direct from a supplier.

4. INVOICE TERMS: Net 30 days following date of Invoice on approved credit. No minimum charge per invoice – all taxes extra. Credit card payments accepted.

5. MINIMUM ORDERS: There are no minimum order requirements. Purchase orders should be for case quantities.

6. FREIGHT POLICY: Transportation charges for air freight shipments are the responsibility of the Buyer. Orders for filtration products, residential water treatment products, replacement parts, and/or media may qualify for free freight allowed (FFA) under the following conditions:

1. Orders must ship to a single address, with a single requested ship date.
2. Net Order Value of \$3,000.00 or more qualifies for FFA
 - Each individual purchase order is evaluated on its' own merit
3. Net Order Value of less than \$3,000.00 does not qualify for FFA. However, each order is then evaluated by product category based on the following criteria to determine if that portion of the order qualifies for FFA.
 - Residential & Food Service Commercial Filtration products/replacement parts: Orders of \$1,000.00 net order value or more
 - Residential Water Treatment products: Orders of 6 units or more or \$3,000.00 net per order
 - Water Treatment Media qualifies under the \$3,000.00 FFA Policy
 - Commercial equipment FOB Vancouver, WA

7. ORDER ACCEPTANCE: UWI reserves the right to accept or reject all orders. Possession of a price sheet or catalog shall not be construed as an offer to sell the product listed. UWI sells wholesale only to distributors, OEM's, Water Conditioning Dealers and other qualified businesses (Plumbing and Construction Suppliers or Installers, Coffee (OCS), Food Service, Vending & Bottling). UWI does not sell directly to consumers.

8. ORDER CONFIRMATIONS: UWI will confirm all orders by e-mail or fax. It is the purchaser's responsibility to review the order confirmation and immediately notify UWI of any order corrections. Unless otherwise notified, UWI will assume the order is correct and will package and ship the order with the least expensive carrier.

TERMS AND CONDITIONS OF SALE – 2022 (Cont.)

10. SHIPPING: Shipping methods should be specified on purchaser's purchase order; otherwise UWI will ship best method. UWI standard shipping method is UPS Ground or Common Carrier LTL or services are available upon request. Stock items are generally shipped within one day. Special orders, large orders, or items not in stock will require additional lead-time. Items out of stock are automatically back-ordered and shipped when received.

11. DELAYS IN SHIPPING: The purchaser shall not hold UWI responsible for any delay or for any damages suffered by the purchaser by reason of any delay due to fires, strikes, riots, Acts of God, government orders or restrictions, delays in transportation, delays by suppliers of materials or parts, inability to obtain necessary labor, or other caused beyond the control of UWI. In the event of such delay, the shipping date shall be extended for a period equal to the time lost by reason of such delay.

12. DAMAGE/LOSS IN TRANSIT, ERRORS AND SHORTAGES: Delivery of goods to a carrier at UWI's warehouse or other shipping point shall constitute delivery. Regardless of freight payment, all risk of loss or damage in transit shall pass to the purchaser at that time. UWI is not responsible for damage, shortage, or loss incurred during transit. Check shipments for damage before acceptance. The purchaser must inspect the goods on arrival from the carrier. Purchaser shall make claims for loss or damage to goods while in transit against the carrier. UWI will assist purchaser in securing satisfactory adjustment of such claims. Claims for errors, shortages, etc. must be made within 5 days of the receipt of goods, otherwise no allowance will be made. WHEN PRODUCTS ARE SHIPPED ON PALLETS, INDIVIDUAL CARTONS MUST BE COUNTED UPON RECEIPT. ANY SHORTAGES OR OTHER DISCREPANCIES MUST BE NOTED ON THE DELIVERY RECEIPT AT THE TIME OF RECEIPT OR CLAIMS WILL BE CONSIDERED WAIVED.

13. PRICES & QUOTATIONS: Orders will be invoiced at the prices in effect at time of shipment. Unless otherwise specified, prices are F.O.B. point of shipment. We reserve the right to change prices and quotations without notice.

14. CHANGED/CANCELLED/MODIFIED ORDERS: Orders are processed as they are received. Additions may delay the original shipment or may be shipped as a separate order. We reserve the right to assess a 15% cancellation charge for all orders cancelled prior to shipping. Non-stock items cannot be changed and are non-cancellable if noted on the order acknowledgment as such. A purchaser's request for modification or cancellation will not be incorporated into the Agreement unless the request is accepted by UWI in a writing that amends the Agreement.

15. RETURNED GOODS: Only new and marketable items with a copy of the invoice and a Return Merchandise Authorization number (RMA) will be accepted. RMA numbers are available by calling customer service and must be requested within 30 days of the invoice date. We reserve the right to assess a 15% restocking charge. Returned merchandise is to be returned freight prepaid. Non-stock items are not returnable if noted on the order acknowledgment as such. Returns accepted within 30 days from date of authorization only.



United Water Inc.
12427 NE 117th Ave Suite 105
Vancouver, WA 98662
T: 877-414-7873 F: 877-669-1069
E: unitedwatercorp@gmail.com



2022 United Water

CONTACT US

12427 NE 117th Avenue
Vancouver, WA, 98662

T: (877) 414-PURE (7873)

F: (877) 669-1069

E: unitedwatercorp@gmail.com

W: www.unitedwaterinc.com



www.unitedwaterinc.com