

SLOANE 59" RECTANGULAR ACRYLIC TUB

Cat. No.
ATFRECN59AIG-XX



L: 59"
W: 30"
H: 24"

Water depth: 18-1/2" to top of tub
Water depth: 14-3/4" to overflow
Overflow slot length: 4-7/8"
Center drain to back of rim: 14-3/8"
Bottom of drain to floor: 3-5/8"
Bathing well to floor: 4-3/8"

The following is recommended for
ATFRECN59A tubs:

•Faucet: part #7901 or 7913



For easier instalation we
recommend use of 5598-ITD
Easy Install Rough In Kit

Gallon Capacity with OF: 60
Shipping Weight: 144 lbs.
Empty Weight: 94 lbs.
Filled Weight with OF: 410 lbs.

Features:




- ▶ Interior and exterior walls acrylic sheets
- ▶ Drain and overflow covers included (available in 6 finishes)
- ▶ Overflow slot with integrated drain
- ▶ Drain included
- ▶ Rim ends are 2-3/4" wide side are 1"
- ▶ No faucet holes
- ▶ IAPMO certified
- ▶ Includes built-in adjusters
- ▶ Angle slope of tub: 31°
- ▶ Tub is thoroughly inspected before shipment
- ▶ Option to add foam insulation between tub walls available
- ▶ Not compatible with air jet system



Finishes:

BN Brushed Nickel
CP Polished Chrome
ORB Oil Rubbed Bronze
PB Polished Brass
PN Polished Nickel
WT White

Custom Colors Available (inside of tub is always white enamel):
Painted bathtubs are considered "special order" and are not returnable

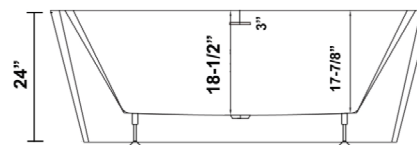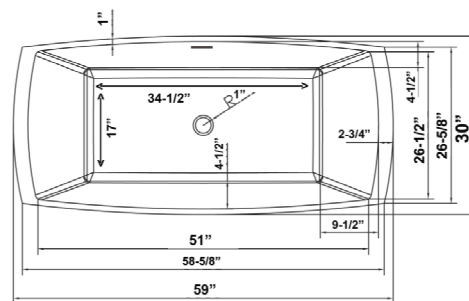

Dimensions of fixture are nominal and specifications subject to change without notice.