

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	


LBV Series Gas Ball Valve – Female Iron Pipe x Female Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied-petroleum (LP) gas and LP gas-air mixtures.

****The National Fuel Gas Code requires a gas shut-off valve installed upstream, within “easy reach” or 6 feet of the gas appliance**

Design Features:

- **Forged brass body** eliminates pinhole leaks commonly associated with cast products.
- **Blow-out proof stem** is assembled from the inside with double o-rings for reliable performance
- **PTFE seat rings** for longer life and consistent performance
- **Right-sized handles** ensures on/off operation even in tight installations
- **Quarter turn flow control** for easy on/off flow control
- **Approved for indoor/outdoor use**

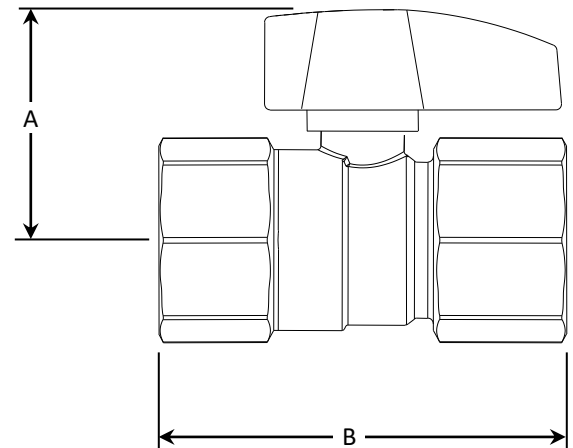

Operating Specifications:

Temperature: -40° - 150° F

Pressure: 5 PSI maximum

MATERIAL SPECIFICATIONS	
Valve Body	Forged brass
Retainer	Forged brass
Ball	Brass, chrome plated
Seats	PTFE
Stem	Brass
O-rings	High-temperature rubber
Washers	PTFE
Handle	Aluminum
Screw	Steel, zinc plated

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
LBV8	1.43	2.13
LBV12	1.60	2.44

Part Listing:

- ☐ LBV8 1/2" FIP x 1/2" FIP
- ☐ LBV12 3/4" FIP x 3/4" FIP

Listings and Certifications:

- CSA listed to ANSI Z21.15 / CSA 9.1, ANSI / ASME B16.44 and CGA CR91-002

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.38 LBV Series Gas Ball Valve – FIP x FIP REV 9.19



©2019 Brasscraft Manufacturing Company