


3/8" Barb check valve



Multi-slot metal mount tabs

Lift-to-Test tab



Bullseye level helps to confirm the pump is installed level

* No tools required

6 ft. Grounded power cord

Rubber feet to reduce noise


LS model does not include safety switch shown



New design offers a longer 3 year warranty life and reduced noise level. Includes lid mounted bullseye level for easy installation. Rated for condensate water up to 150° F. Automatic start/stop operation with thermally protected motor. More water pumped out per cycle means the pump runs less and lasts longer. Larger 2.5 quart tank capacity.

Model	Note	Volts - Hz	Amps - Watts	Weight	Flow (GPH)@			Max lift	Outlet	Inlet
					1'	10'	15'			
BK171LSUL	w/o Safety Switch	115 - 60	1.1 - 60	3.6 lbs	112	64	19	17'	3/8" Barb	4 x 1.1"
BK171TUL	w/ Tubing	115 - 60	1.1 - 60	4.8 lbs	112	64	19	17'	3/8" Barb	4 x 1.1"
BK171UL		115 - 60	1.1 - 60	3.7 lbs	112	64	19	17'	3/8" Barb	4 x 1.1"
BK221LSUL	w/o Safety Switch	115 - 60	1.2 - 65	3.6 lbs	125	83	50	22'	3/8" Barb	4 x 1.1"
BK221TUL	w/ Tubing	115 - 60	1.2 - 65	4.8 lbs	125	83	50	22'	3/8" Barb	4 x 1.1"
BK221UL		115 - 60	1.2 - 65	3.7 lbs	125	83	50	22'	3/8" Barb	4 x 1.1"
BK222TUL	w/ Tubing	230 - 50/60	0.9 - 77	5.4 lbs	156	103	68	22'	3/8" Barb	4 x 1.1"
BK222UL		230 - 50/60	0.9 - 77	4.3 lbs	156	103	68	22'	3/8" Barb	4 x 1.1"

Average Performance

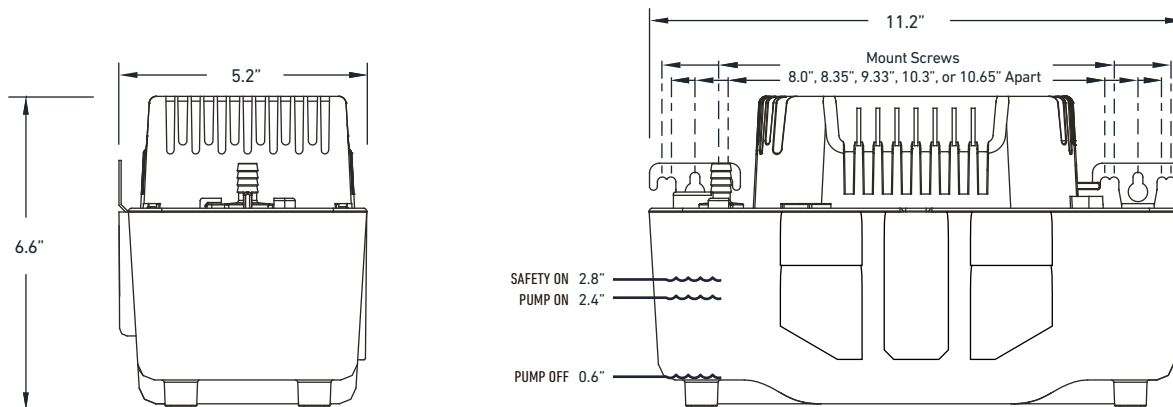

BeckettUS.com



Condensate Pumps