

NSF CONSTRUCTION

3-ELEMENT COMMERCIAL ELECTRIC WATER HEATER

INSTALLATION INSTRUCTIONS

THE MANUFACTURER OF THIS WATER HEATER WILL NOT BE LIABLE FOR ANY DAMAGE RESULTING FROM FAILURE TO COMPLY WITH THESE INSTRUCTIONS. READ THESE INSTRUCTIONS THOROUGHLY BEFORE STARTING.

For safety and convenience, the NSF construction components must be installed and serviced by a qualified technician.

Before proceeding with installation of this NSF kit, please assure that this water heater has been installed in accordance with local codes and/or ordinances. In the absence of local codes, this water heater must be installed in accordance with the National Electric Code – latest edition. Refer to Installation instructions provided with this water heater.

Assure the correct NSF kit for this water heater has been provided.

NSF Kit Required	
Gallon Size	NSF Kit Part No.
50	265-45446-01
80	265-45446-02
120	265-45446-03

Tools and Materials Required:

- RTV sealant (provided)
- Two (2) Control box seals (provided)
- Four (4) sheet metal screws (provided)
- NSF label (provided) attached to these instructions
- Caulk gun
- 1/4" nut driver and/or drive tool

Installation Procedure:

1. Place control box seals on top and bottom of control box sealing gap between control box and water heater jacket. Attach control box seals to control using sheet metal screws. Two (2) seals are required. Attach one (1) to topside of box and one (1) to bottom side of box (**see Figure 1**).
2. Seal water heater to floor using RTV sealant. Be sure to seal water heater completely sealed to floor without leaving voids (**see Figure 2**).
3. Place NSF label on or adjacent to rating plate.

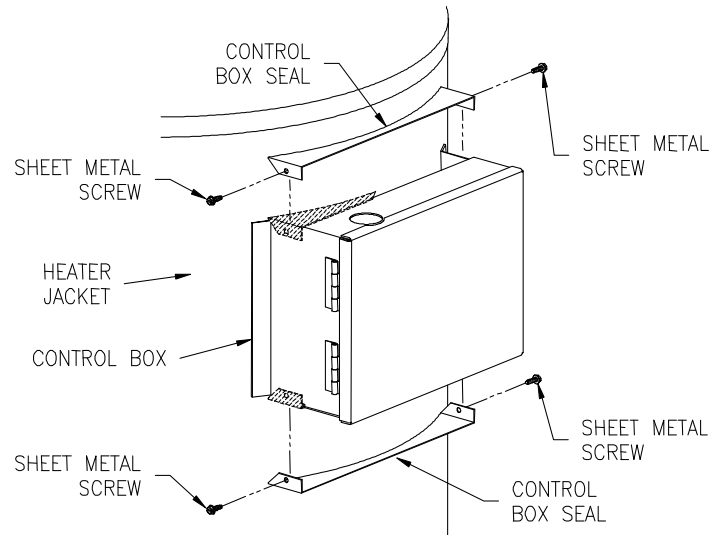


Figure 1

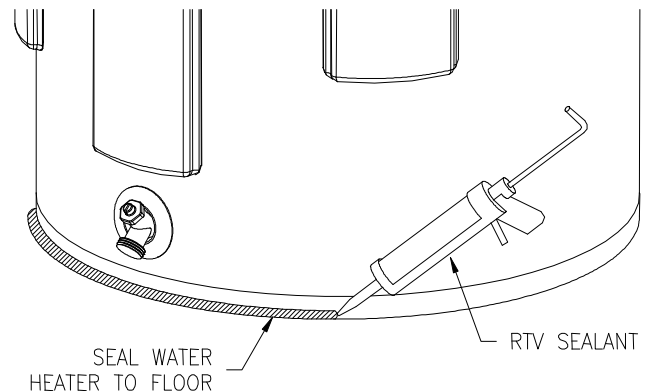


Figure 2