

## For Residential and Commercial Applications

|                |  |                      |  |
|----------------|--|----------------------|--|
| Job Name       |  | Engineer / Architect |  |
| Job Location   |  | Wholesaler           |  |
| Submittal Date |  | Contractor           |  |

# BL12-\*\*WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

**Use:** For use in potable water distribution systems in accessible locations only.

**Design Features:**

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection




**Operating Specifications:**

**Temperature:** 40°- 160° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.450" ID (0.660" OD)

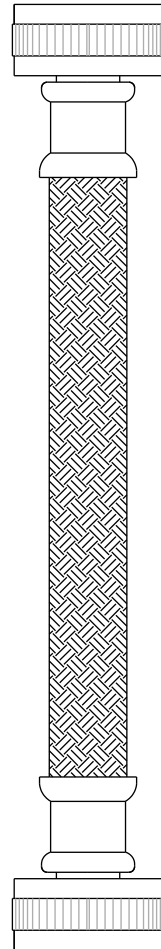

### CONNECTOR MATERIAL SPECIFICATIONS

|                   |                                |
|-------------------|--------------------------------|
| <b>Inner Hose</b> | Reinforced PVC                 |
| <b>Braiding</b>   | PVC coated yarn                |
| <b>Barb</b>       | Brass                          |
| <b>Ferrule</b>    | Stainless steel                |
| <b>Nut</b>        | Brass, plated or polypropylene |
| <b>Washer</b>     | Rubber                         |


**Part Listing:**

|                          |              |                                                                              |
|--------------------------|--------------|------------------------------------------------------------------------------|
| <input type="checkbox"/> | BL12-48WA F  | 3/4" female hose thread x 3/4" female hose thread x 48" length, flag labeled |
| <input type="checkbox"/> | BL12-48WA P  | 3/4" female hose thread x 3/4" female hose thread x 48" length, bagged       |
| <input type="checkbox"/> | BL12-60WA B  | 3/4" female hose thread x 3/4" female hose thread x 60" length, bulk         |
| <input type="checkbox"/> | BL12-60WA F  | 3/4" female hose thread x 3/4" female hose thread x 60" length, flag labeled |
| <input type="checkbox"/> | BL12-60WA P  | 3/4" female hose thread x 3/4" female hose thread x 60" length, bagged       |
| <input type="checkbox"/> | BL12-60WA P2 | 3/4" female hose thread x 3/4" female hose thread x 60" length, 2 per bag    |
| <input type="checkbox"/> | BL12-72WA B  | 3/4" female hose thread x 3/4" female hose thread x 72" length, bulk         |
| <input type="checkbox"/> | BL12-72WA F  | 3/4" female hose thread x 3/4" female hose thread x 72" length, flag labeled |
| <input type="checkbox"/> | BL12-72WA P  | 3/4" female hose thread x 3/4" female hose thread x 72" length, bagged       |

*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

**BrassCraft®**

# BL12-\*\*WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

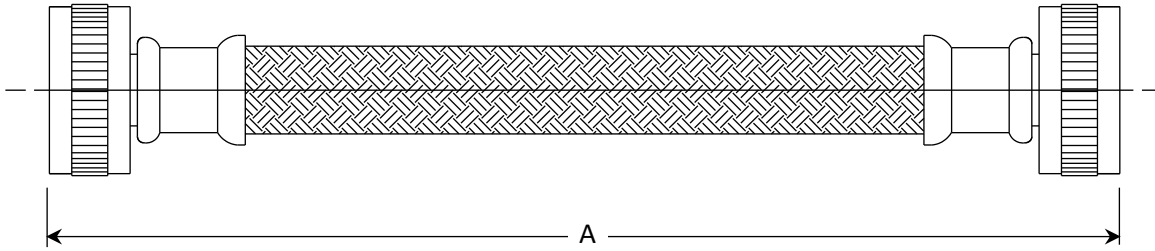

| <b>PART DIMENSIONS (Inches)</b> |               |
|---------------------------------|---------------|
| <b>Model</b>                    | <b>DIM. A</b> |
| BL12-48WA                       | 48.0 / 49.0   |
| BL12-60WA                       | 60.0 / 61.0   |
| BL12-72WA                       | 72.0 / 73.0   |

## Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

**BrassCraft®**