

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection




Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.450" ID (0.660" OD)

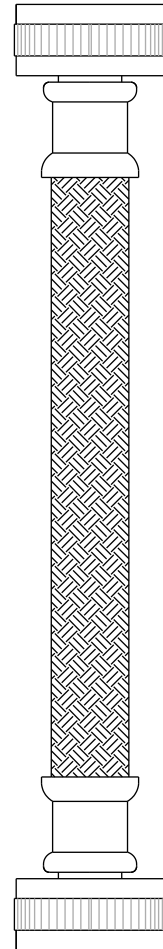

CONNECTOR MATERIAL SPECIFICATIONS


Inner Hose	Reinforced PVC
Braiding	PVC coated yarn
Barb	Brass
Ferrule	Stainless steel
Nut	Brass, plated or polypropylene
Washer	Rubber

Part Listing:

☐	BL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length, flag labeled
☐	BL12-48WA P	3/4" female hose thread x 3/4" female hose thread x 48" length, bagged
☐	BL12-60WA B	3/4" female hose thread x 3/4" female hose thread x 60" length, bulk
☐	BL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length, flag labeled
☐	BL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
☐	BL12-60WA P2	3/4" female hose thread x 3/4" female hose thread x 60" length, 2 per bag
☐	BL12-72WA B	3/4" female hose thread x 3/4" female hose thread x 72" length, bulk
☐	BL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length, flag labeled
☐	BL12-72WA P	3/4" female hose thread x 3/4" female hose thread x 72" length, bagged

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BL12-WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread**

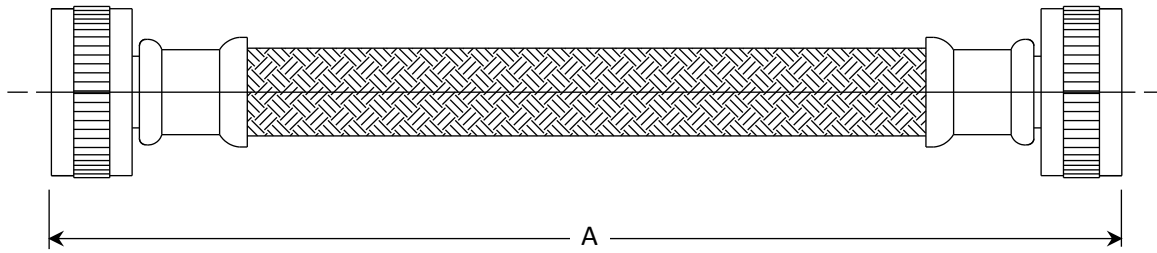

PART DIMENSIONS (Inches)	
Model	DIM. A
BL12-48WA	48.0 / 49.0
BL12-60WA	60.0 / 61.0
BL12-72WA	72.0 / 73.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®