

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BRPX1901LRX Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:


- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Knurled oval handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
- **PEX end** designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807



Operating Specifications:

Temperature: 40° - 160° F

Pressure: 125 PSI maximum

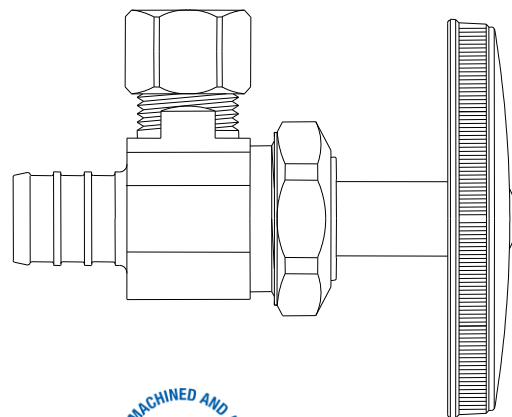

STOP MATERIAL SPECIFICATIONS

Body	Brass
Stem	POM
Bib & Packing Washers	Rubber
Packing Nut	Brass
Handle	Polycarbonate
Handle Screw	Steel, plated
Plastic Sleeve	Plastic
Compression Nut	Brass
Compression Sleeve	Brass

Part Listing:

- ☐ BRPX1901LRX R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



400.85 BRPX1901LRX Multi-Turn Dual Outlet Stop – Barbed PEX Inlet x Comp REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company

BRPX1901LRX Multi-Turn Dual Outlet Stop – Barbed PEX (Inlet) x Compression x Compression

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
BRPX1901LR	1.06	2.82	1.06

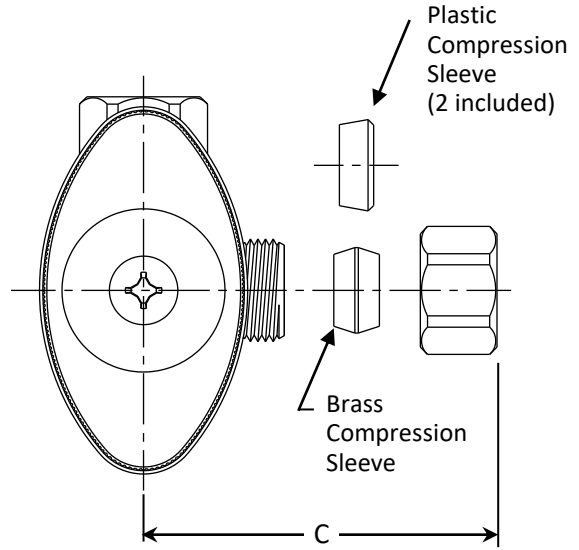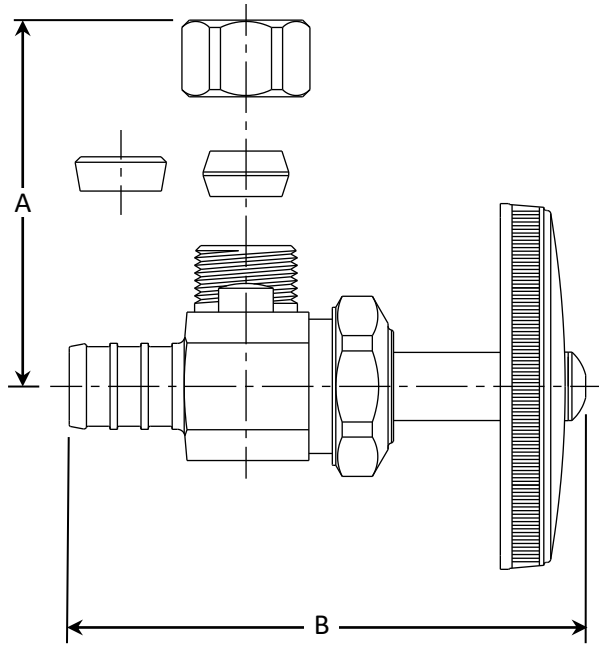

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.