

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

DRS83X Integral Shut-Off Straight Stop w/ Lock Shield & Screwdriver Slot – Female Iron Pipe x Male Iron Pipe

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications use our KT™ series ball stop.


Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Screwdriver slot stem** helps protect against accidental stop operation during rough-ins and in general use
- 

Operating Specifications:


Temperature: 40° - 160° F

Pressure: 125 PSI maximum

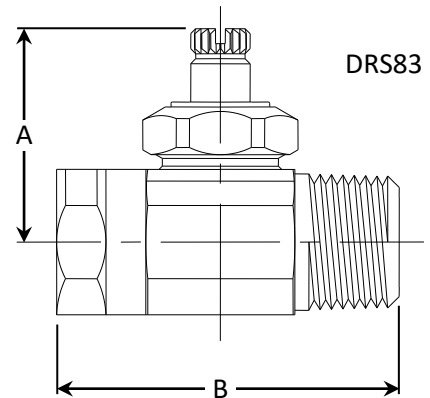

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Screwdriver Slot Stem	Brass, plated
Bib & Packing Washers	Rubber
Packing Nut	Brass, plated

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
DRS83X	1.38	2.10
SSR83X	1.52	2.10

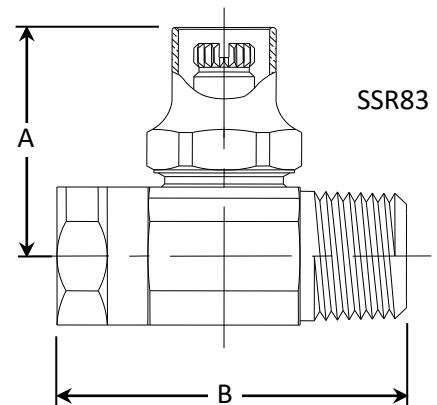

Part Listing:

- | | | |
|--------------------------|------------|---|
| ☐ | DRS83X CBT | 1/2" FIP x 1/2" MIP with screwdriver slot, chrome plated, bulk, plain pkg |
| ☐ | DRS83X R | 1/2" FIP x 1/2" MIP with screwdriver slot, rough brass |
| ☐ | DRS83X R1 | 1/2" FIP x 1/2" MIP with screwdriver slot, rough brass, window tray |
| ☐ | DRS83X RBT | 1/2" FIP x 1/2" MIP with screwdriver slot, rough brass, bulk, plain pkg |
| ☐ | SSR83X R | 1/2" FIP x 1/2" MIP with lock shield, rough brass |

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®