

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

G2BRPX14/44X 1/4 Turn Straight Stop – Barbed PEX Inlet

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115°F. For those applications, use our KT™ series ball stop.



Design Features:

- **One-piece shut-off mechanism** provides smooth on-off operation.
- **Positive 1/4 turn shut-off.**
- **Corrosion-resistant handle** is plated in an attractive chrome finish.
- **Machined one-piece brass body** provides strength, durability and long-lasting performance.
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins.
- **100% leak tested.**
- **PEX end** designed to ASTM F1807.
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807 and/or F2098 connection methods.
- **No-lead brass material** meets compliance for safe drinking.

Operating Specifications:

Temperature: 40° - 160°F

Pressure: 125 PSI maximum

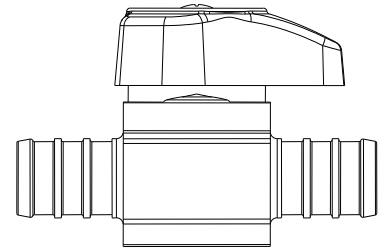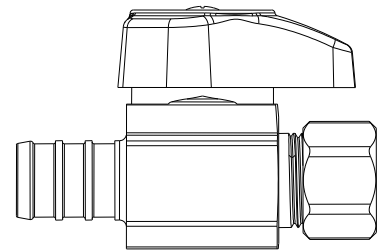

STOP MATERIAL SPECIFICATIONS

Body	Brass
Stem Barrel	Rubber
Stem Shaft	Glass-filled polypropylene
O-ring	Rubber
Handle	ABS, plated or zinc die cast, plated
Screw	Steel, zinc plated
Compression Nut	Brass
Compression Sleeve	Brass

Part Listing:

- | | | |
|--------------------------|---------------|--|
| ☐ | G2BRPX14X C | 1/2" Nom Crimp Barb (for PEX) x 3/8" OD Compression, Chrome Plated |
| ☐ | G2BRPX14X CM5 | 1/2" Nom Crimp Barb (for PEX) x 3/8" OD Compression, Chrome Plated |
| ☐ | G2BRPX14X R | 1/2" Nom Crimp Barb (for PEX) x 3/8" OD Compression, Rough Brass |
| ☐ | G2BRPX44X C | 1/2" Nom Crimp Barb (for PEX) x 1/2" Nom Crimp Barb (for PEX), Chrome Plated |
| ☐ | G2BRPX44X R | 1/2" Nom Crimp Barb (for PEX) x 1/2" Nom Crimp Barb (for PEX), Rough Brass |

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

**Products shown may differ from those available in the Canadian market.*


400.59 G2BRPX14/44X 1/4 Turn Straight Stop – Barb PEX x Comp REV 9.25

BrassCraft®

© 2025 BrassCraft Manufacturing Company


G2BRPX14/44X 1/4 Turn Straight Stop – Barbed PEX Inlet

G2BRPX14X, barbed PEX x compression

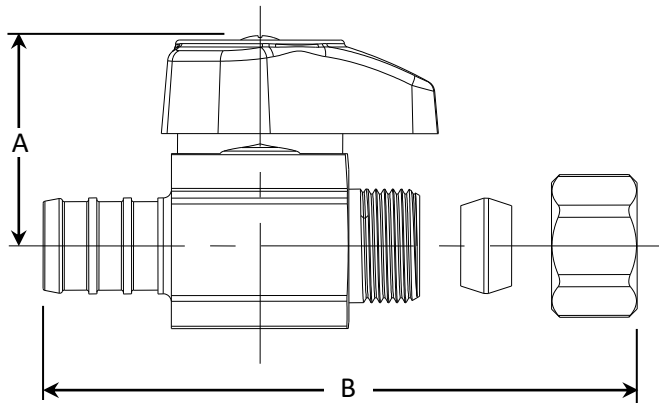

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
G2BRPX14X	1.03	2.08
G2BRPX44X	1.03	2.13

G2BRPX44X, barbed PEX both ends

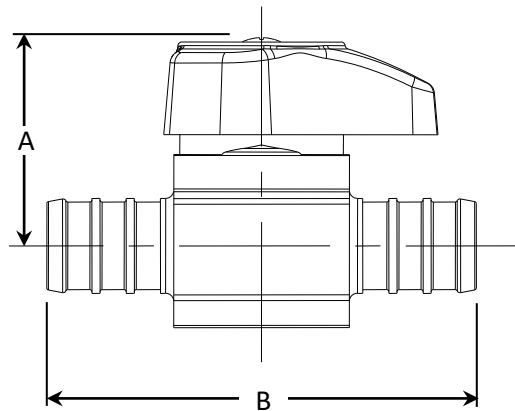

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF61)

NSF/ANSI/
CAN61:Q ≤0.5



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

**Products shown may differ from those available in the Canadian market.*

400.59 G2BRPX14/44X 1/4 Turn Straight Stop – Barb PEX x Comp REV 9.25

BrassCraft®

© 2025 BrassCraft Manufacturing Company