

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

G2CPN04X/14X 1/4 Turn Straight Stop Press Connect x Compression

Use: For use in potable water distribution systems in accessible locations only.


Design Features:

- **One-piece shut-off mechanism** provides smooth on/off operation.
- **Compatible** with copper pipe (ASTM B88 tubing).
- **Fast, reliable and secure** connection.
- **Positive 1/4 turn** shut off.
- **Corrosion-resistant handle** is plated in a chrome finish.
- **Machined one-piece brass body** provides strength, durability and long-lasting performance.
- **Easy-to-remove handle** helps protect against accidental operation during rough-ins.
- **100% leak-tested.**
- **No-lead brass material** meets compliance for safe drinking.

Operating Specifications:

Temperature: 40° - 160° F

Pressure: 125 PSI maximum

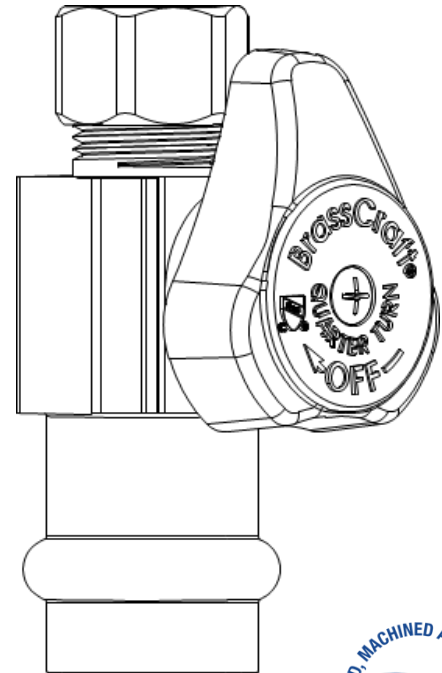

STOP MATERIAL SPECIFICATIONS

Body	Brass, plated
Stem Barrel	TPE
Stem Shaft	Glass-filled polypropylene
O-ring	EPDM
Handle	ABS, plated
Handle Screw	Steel, zinc plated
Compression Nut	Brass, plated
Compression Sleeve	Brass


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft®. This specification must be returned to BrassCraft if requested.

400.365_G2CPN04X/14X_PressConnect Stops_Compr Outlet_REV 10.24

BrassCraft®

©2024 BrassCraft Manufacturing Company

G2CPN04X/14X 1/4 Turn Straight Stop Press Connect x Compression

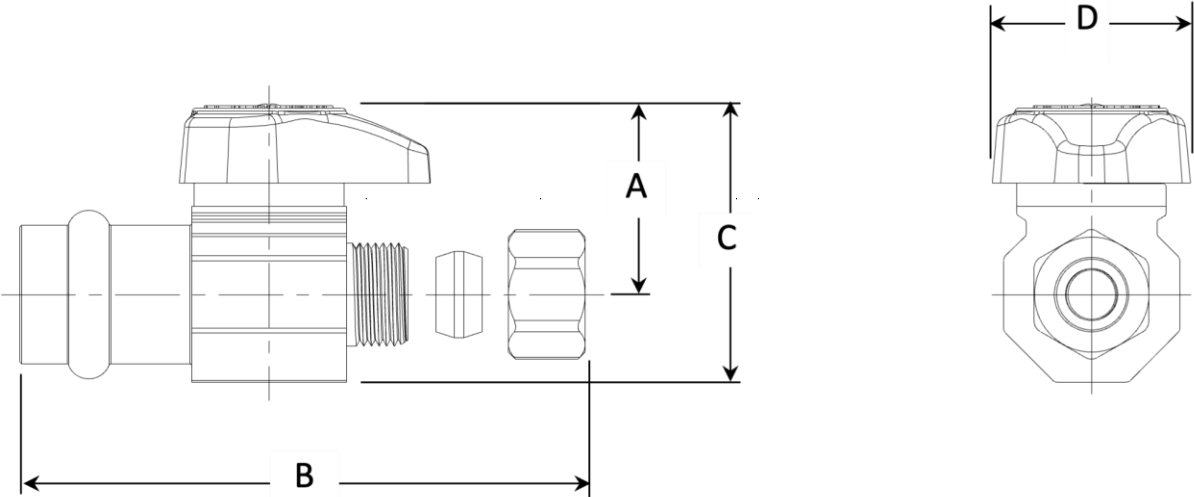

PART DIMENSIONS (Inches)				
Model	DIM A	DIM B	DIM C	DIM D
G2CPN04X	1.03	2.38	1.50	1.07
G2CPN14X	1.03	2.38	1.50	1.07

Part Listing:

- ☐ G2CPN04X C1 1/2" Nom Press Connect x 1/4" OD Compression, Chrome Plated, Window Tray
- ☐ G2CPN14X C1 1/2" Nom Press Connect x 3/8" OD Compression, Chrome Plated, Window Tray

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)

NSF/ANSI/
CAN61:Q ≤0.5



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft®. This specification must be returned to BrassCraft if requested.

400.365_G2CPN04X/14X_PressConnect Stops_Compr Outlet_REV 10.24

BrassCraft®

©2024 BrassCraft Manufacturing Company