

For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

KTBRPX1901DVX 1/4 Turn Dual Outlet, Dual Shut-Off Ball Stop – Crimp Barb Inlet (for PEX)

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Independent flow control.** Dual outlet, dual shut-off operation permits water flow to be controlled at one fixture while maintaining flow to the other fixture
- **Machined brass ball** is specially engineered and mated with PTFE seats to provide smooth operation
- **Two high-performance o-rings** withstand high temperatures
- **Forged one-piece brass body** provides strength, durability, and long-lasting performance
- **Brass stems** are assembled from the inside out with two o-rings to ensure safe, reliable performance
- **Plated stems** provide corrosion resistance and prevent o-ring damage
- **Metal handles** are designed for durability, corrosion resistance, and a sleek appearance
- **Easy-to-remove handles** with screw attachments help protect against accidental stop operation during rough-ins
- **100% leak tested**
- **PEX end** designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods
- 

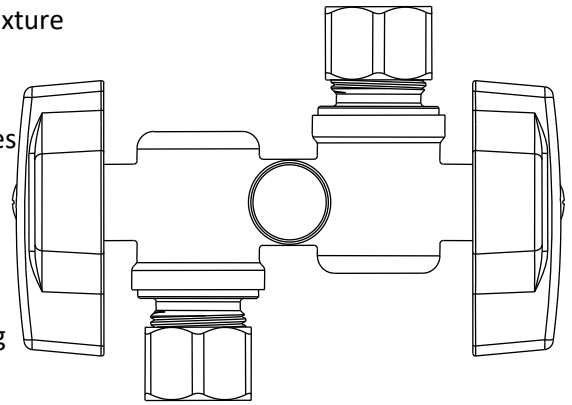

Operating Specifications:

Temperature: 40° - 180° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS

Body	Brass
Stem	Brass, plated
Seats	PTFE
Ball	Brass, plated
O-ring	Rubber
Handle	Zinc die cast, plated
Handle Screw	Steel, zinc plated
Compression Nut	Brass, plated
Compression Sleeve	Brass

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.137 KTBRPX1901DVX 1/4 Turn Ball Stop - Dual Outlet - Crimp Barb REV 9.19

BrassCraft®


©2019 Brasscraft Manufacturing Company

KTBRPX1901DVX 1/4 Turn Dual Outlet, Dual Shut-Off Ball Stop – Crimp Barb Inlet (for PEX)

Part Listing:

- ☐ KTBRPX1901DVX R 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass
- ☐ KTBRPX1901DVX R1 1/2" nom crimp barb (for PEX) x 3/8" OD compression x 3/8" OD compression, rough brass, window tray

PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
KTBRPX1901DVX	1.12	3.35	1.12	1.02	1.43

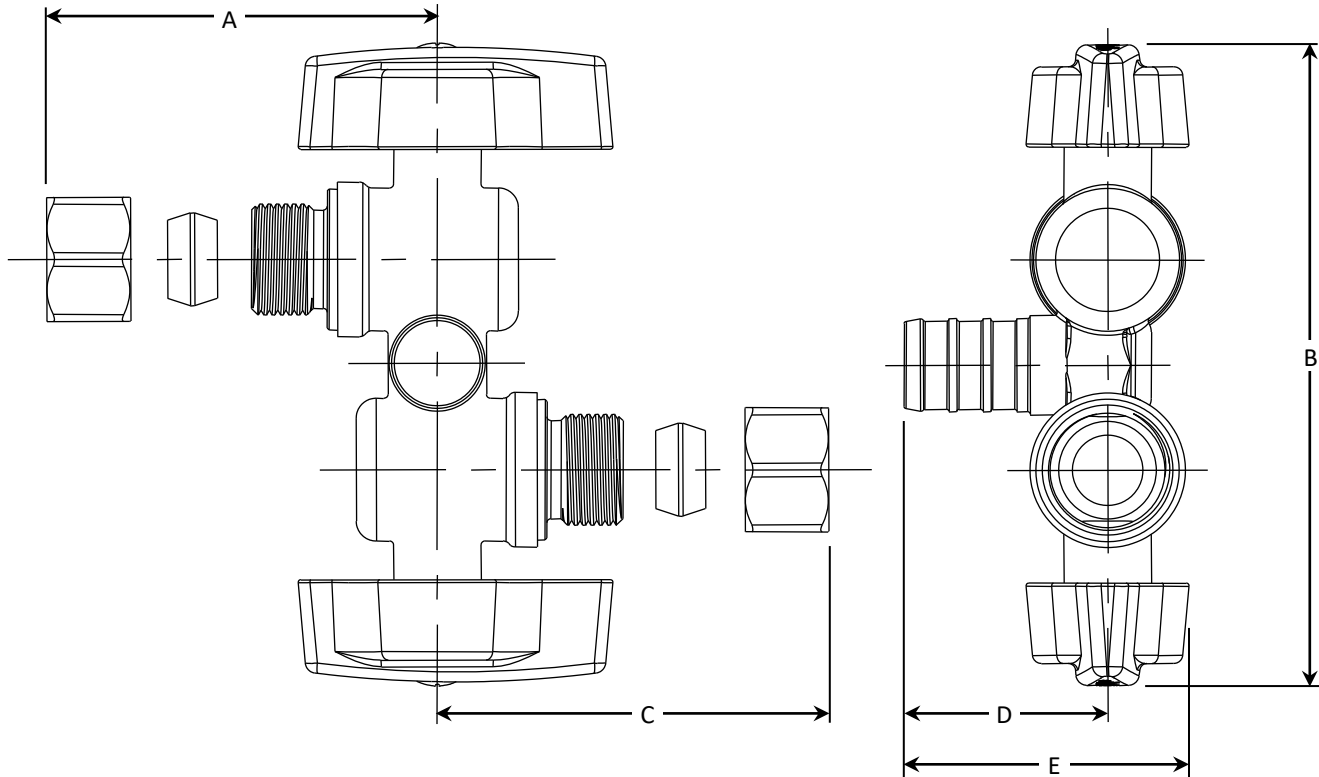

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.137 KTBRPX1901DVX 1/4 Turn Ball Stop - Dual Outlet - Crimp Barb REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company