

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

SR14X Multi-Turn Straight Stop w/ Loose Key – Sweat x Compression

Use: For use with potable water systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops.

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Large loose key handle** provides a secure grip for trouble-free on/off operation
- **Removable loose key handle** helps protect against accidental stop operation during rough-ins and general use
- 

Operating Specifications:

Temperature: 40° - 160° F


Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem	Brass, plated
Bib & Packing Washers	Rubber
Packing Nut	Brass, plated
Loose Key	Zinc, die cast
Loose Key Stem	Brass
Compression Sleeve	Brass
Compression Nut	Brass, plated

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
SR14X	1.45	2.00



Excludes loose key handle

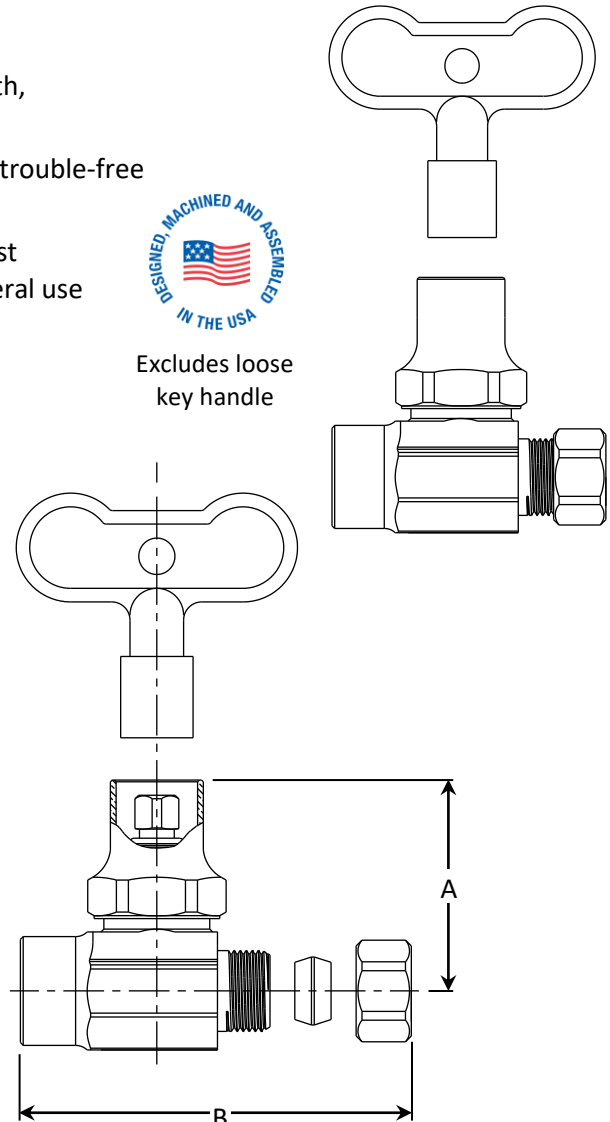

Part Listing:

- ☐ SR14X C 1/2" nom sweat x 3/8" OD compression, loose key, chrome

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)

NSF/ANSI/
CAN61:Q≤0.5



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.149 SR14X Multi-Turn Straight Stop - Sweat x Comp REV 3.23

BrassCraft®

©2023 BrassCraft Manufacturing Company