




Brass Ball Valves



Features

- 600 WOG
- 150 WSP
- Full Port
- NSF 61 Annex G Approved
- Meets MSS SP-110 Standards
- Blow-out Proof Stem
- Adjustable Packing

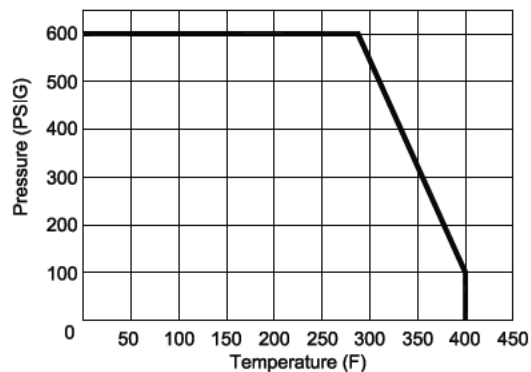

Sweat Ends
Per ANSI B 16.18



Threaded NPT Ends
Per ANSI B 1.20.1

Weight					
Product#	Size	Wt. (Lbs)	Product#	Size	Wt. (Lbs)
687028	1/2"	0.40	687482	1/2"	0.33
687029	3/4"	0.79	687484	3/4"	0.73
687031	1"	1.19	687486	1"	1.08
687032	1-1/4"	1.92	687488	1-1/4"	1.92
687034	1-1/2"	2.60	687489	1-1/2"	2.43
687037	2"	4.37	687490	2"	4.17





Brass Ball Valves

Specifications

No.	Part	Material	Qty
1	Body	Low Lead Brass *	1
2	Ball	Low Lead Brass *	1
3	End Cap	Low Lead Brass *	1
4	Seat	PTFE	2
6	Stem	ASTM B16	1
7	Stem	PTFE	1 Set
8	Handle	ASTM A283-D	1
9	Sleeve	Plastic/Vinyl	1
11	Packing	ASTM B16	1
13	Handle Nut	AISI 1010	1

* Chemical Content by Percentage is:

Cu	Bi	Pb	Sn	Ni	Fe	AL	Zn
58 - 61	< 2.0	< 0.2	< 0.5	< 0.5	< 0.2	< 0.2	Remainder

Dimensions in inches

Size	ØD	E	H	L		L1
				687028~687037	687482~687490	
1/2"	0.5	2.95	1.5	2.13	1.93	0.5
3/4"	0.75	3.94	1.85	2.48	2.72	0.75
1"	0.98	3.94	2.05	2.99	3.31	0.91
1-1/4"	1.26	4.92	2.36	3.35	3.78	0.97
1-1/2"	1.5	4.92	2.56	3.62	4.29	1.09
2"	1.97	7.87	3.11	4.25	5.35	1.34

