



California Faucets®

MIRAMAR™

WALL TUB SPOUT

Features



- 8-1/2" wall to center
- Max flow rate: 10 gpm (37.9 L/min)
- For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1

D-48

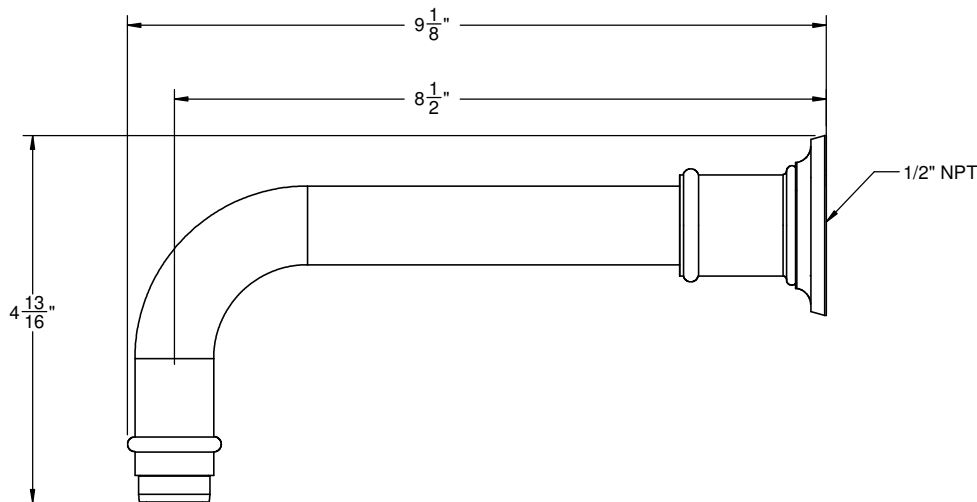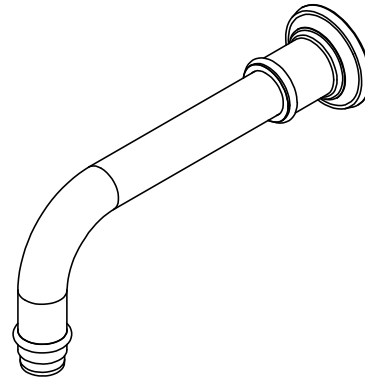

THROUGH-HOLE SPECIFICATIONS	
MIN	RECOMENDED
SPOUT: Ø 1-1/4"	Ø 1-3/8"

