


ROOF DRAIN AND OVERFLOW DRAIN

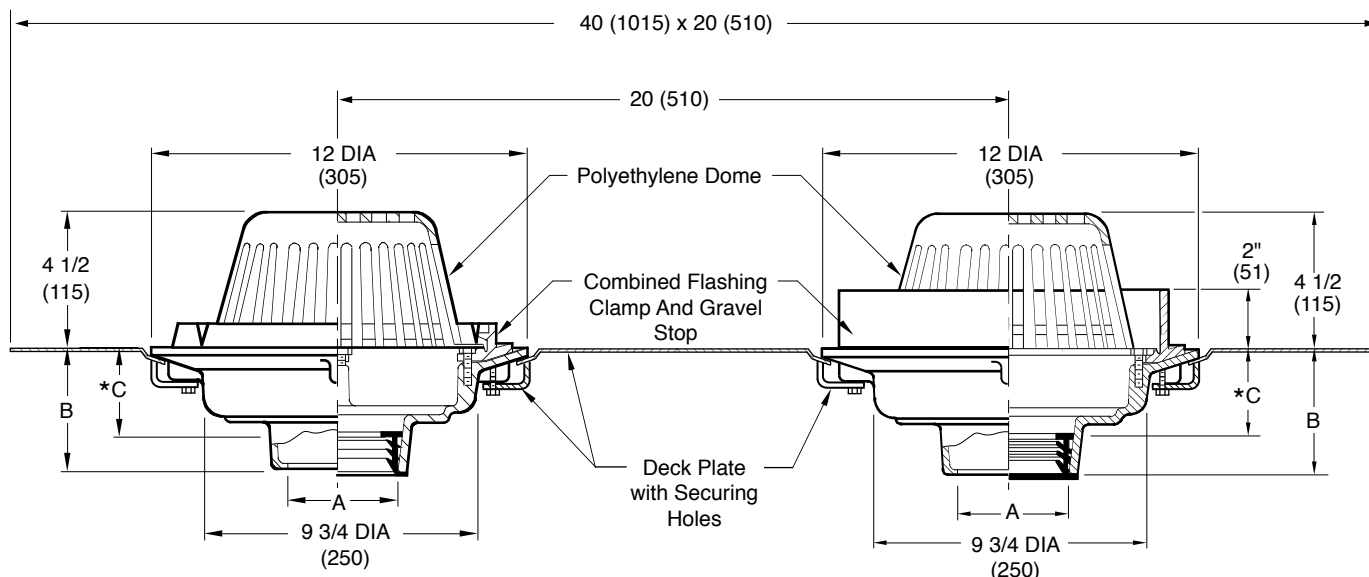

* NOTE: This Dimension to Internal Stop of Speedi-Set Gasket.

☐ 1850C.....CAULK OUTLET
☐ 1850Y..... NO-HUB OUTLET

A SIZE	B		* C	FREE AREA SQ IN (SQ CM)
	CAULK, NO-HUB, & SPEEDI-SET	THREADED		
02(50),03(75), 04(100) 05(125), 06(150)	6 (150)	4 3/4 (120)	4 3/4 (120)	71.5 (461)

REGULARLY FURNISHED:

Duco Cast Iron Body, Double Deck Plate with Securing Holes, Combined Flashing Clamp and Gravel Stop for Roof Drain and External Water Dam for Overflow Drain, both with Polyethylene Dome.

VARIATIONS:

☐ Expansion Joint (Specify Fig.1710)
☐ Extension (Specify Height) -E
☐ L Speedi-Set Service Weight
☐ LXH Speedi-Set Extra Heavy
☐ Secondary Flashing Clamp -C2
☐ Vandal Proof Dome -U
☐ T Threaded Outlet

OPTIONAL MATERIALS:

☐ Aluminum Dome -AD
☐ Cast Iron Dome -CID
☐ Galvanized Cast Iron Dome -CIDG
☐ Galvanized Cast Iron Body & Collar -G
☐ Rough Bronze Dome -RBD

NOTE: Stated flow rates for roof drains are based on particular test piping configurations and dimensions. Installed roof drain flow rates cannot be stated unless the attached piping configuration is known and the effects of the drainage calculated.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
s1850

SIZE
A

SCALE:
NONE

DATE:
4-26-11

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TBW

1850

FIGURE
NUMBER

A	12-1-15	Added Flow Rate Note	TBW	BW
REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET
------------------	----------------------

FIGURE NUMBER
1850



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov