


PARKING DRAINS WITH 12" (305) ROUND TOPS

HEAVY DUTY DRAINS WITH TRACTOR GRATE

FUNCTION: Used in heavy traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on grade locations and as flashing clamp when installed in waterproof floors.

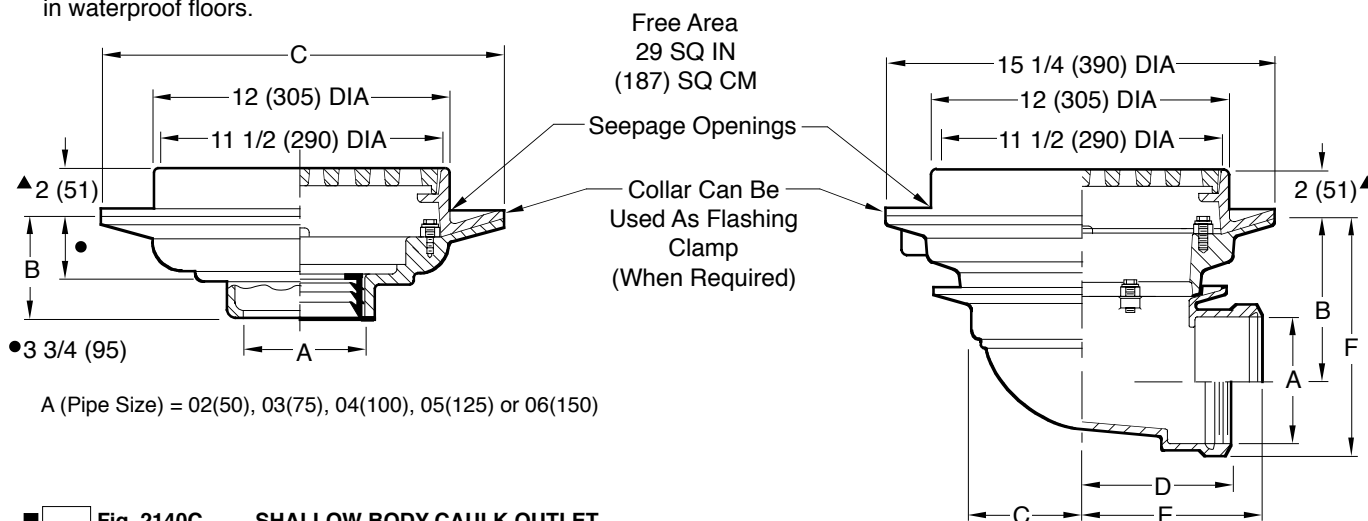

-  Fig. 2140C . . . SHALLOW BODY CAULK OUTLET
 ■  Fig. 2141C . . . DEEP BODY CAULK OUTLET
 ■  Fig. 2141Y . . . DEEP BODY NO-HUB OUTLET

- | | |
|--|----------------------------------|
| | Fig. 2145C . . . CAULK OUTLET |
| | Fig. 2145T . . . THREADED OUTLET |

Figure	B			C DIA
	Caulk	Thread	NO-HUB	
2140	3 3/4 (95)	3 3/4 (95)	5 (125)	**15 1/4 (390)
2141	5 (125)	3 3/4 (95)	5 (125)	15 1/4 (390)

** Dimension is 16 (405) for Caulk outlet.

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar
with Cast Iron Tractor Grate.

VARIATIONS:

- ☐ Flat Bottom Strainer -FBS
- ☐ L Speedi-Set Service Weight
02(50), 03(75) & 04"(100) sizes only (Fig. 2141 only)
- ☐ LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04"(100) sizes only (Fig. 2141 only)
- ☐ NO-HUB Adaptor (Specify
Fig. 2646Y) (Fig. 2140 & 2145 only)
- ☐ Sediment Bucket -B
- ☐ Square Top -S
- ☐ Trap Primer Connection -P050
1/2" (13) & -P075 3/4" (19) (Fig. 2141, 2141Y & 2145 only)
- ☐ Vandal Proof Grate -U
- ☐ T Threaded Outlet
- ☐ Quad Close Trap Seal
(Specify Fig. 2692) (Fig. 2140 & 2141 Only)

OPTIONAL MATERIALS:

- | | |
|--------------------------|--|
| ☐ | Ductile Iron Grate -M |
| ☐ | Galvanized Cast Iron -G |
| ☐ | Nickel Bronze Top -NB |
| ☐ | Polished Bronze Top -PB |
| ☐ | Stainless Steel (Specify
Fig. 9730) |

NOTE: 02(50), 03(75), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

NOTE: Dimensions shown in parentheses are in millimeters.

- This Dimension to Internal Stop of Speedi-Set Gasket.

▲add 1/8" (3) when bronze top is specified.

■ Meets U. S. Gov't Spec. WW-P-541-b.
Type 220 04" (100) size only.

K	1-18-17	Revised Symbols	TBW	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2140, 2141, 2145
J	6-11-15	Revised Variations	TBW	CL			
H	1-10-07	Revised Chart	RN	CL			
G	5-15-98	Submittal Update	ASL	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov