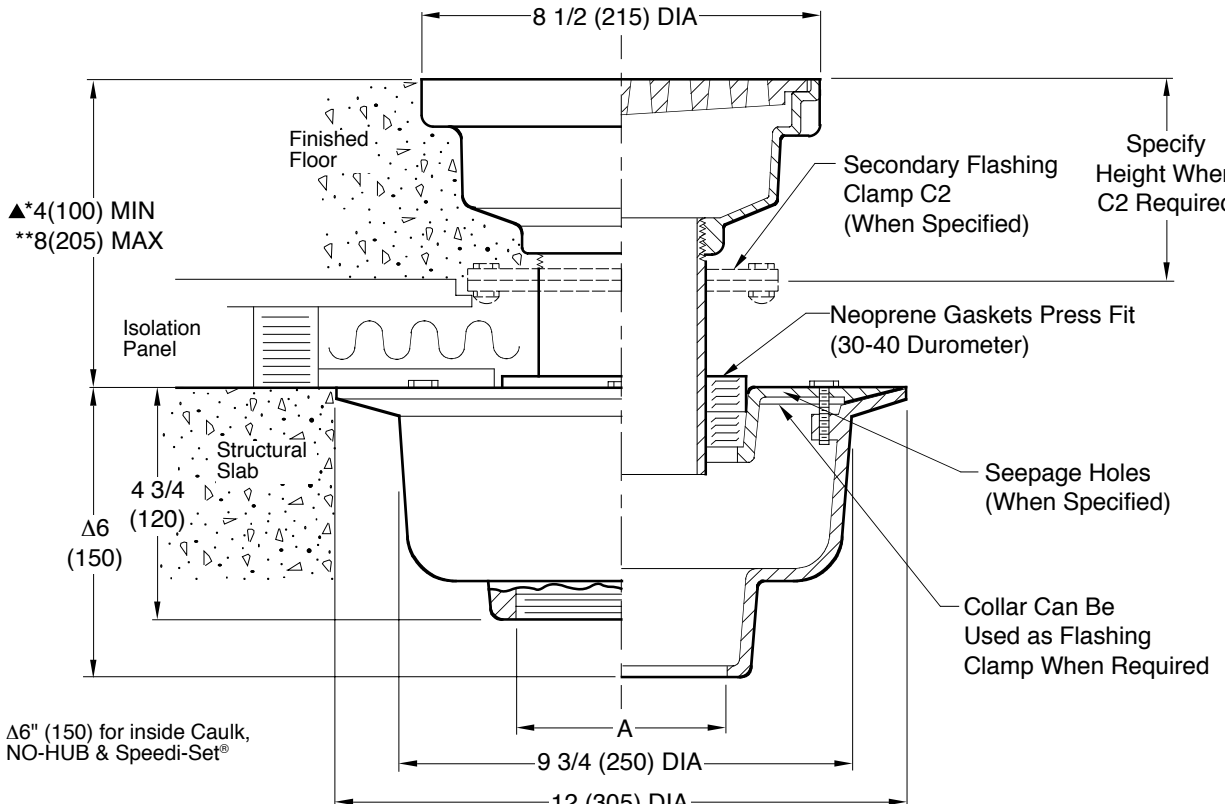


G	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com MEMBER OF: MEMBER OF: MEMBER OF:				LOCATION 	
	DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS					
	FUNCTION: Used in areas which may have to be isolated from the other parts of the building; such as mechanical equipment rooms, studios, music rooms, laboratories and data processing areas.					
						
NOTE: *Add 1/4" (6) for Nickel Bronze or Polished Bronze Top. **If greater dimension than shown from lower flange to top is required specify a longer nipple. ▲ Nipple may require cutting to achieve minimum dimension.						
REGULARLY FURNISHED: Duco Cast Iron Lower Body and Flashing Collar, Adjustable Nipple, Upper Body, Grate and Neoprene Isolation Gaskets. VARIATIONS: ☐ Safe-Set Sediment Bucket -B (Fig. 9341) ☐ Secondary Flashing Clamp -C2 ☐ Seepage Holes (in collar) -WSH ☐ Sump Receiver Plate -R ☐ Underdeck Clamp -C ☐ L Speedi-Set® Service Weight 02(50), 03(75) & 04"(100) sizes only ☐ LXH Speedi-Set® Extra Heavy 02(50), 03(75) & 04"(100) sizes only ☐ Vandal Proof Grate -U ☐ Tractor Grate -TG						
OPTIONAL MATERIALS: ☐ Galvanized Cast Iron -G ☐ Nickel Bronze Top -NB ☐ Polished Bronze Top -PB ☐ Ductile Iron Grate -M NOTE: Dimensions shown in parentheses are in millimeters.						
9340						
9340						