

Cast Deckmount Sink Faucets 4" Centers

TECK®
COMMERCIAL

DELTA®

Specification: (example)

- **HEAVY DUTY CAST BRASS** sink faucet
 - 102mm (4") centers, two handle
 - Polished chrome plated finish
 - **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
 - Metal hold-down package
 - Color indexed metal handles with vandal resistant screws
 - **TUF-TECK®** compression structures
- and ... with ... Metal Pop-up (if applicable)
 with ... (add spout required)
 with ... (add outlet required)
 with ... (add handle required)
 with ... (add suffix **-LS** if required – See Back Page)
 with ... (add suffix **-TI** if required – See Back Page)

27T4834



27T4233

Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.
CAST Deckmount LESS Pop-up	27T4
CAST Deckmount WITH Pop-up	27T5



SPOUT	OUTLET	HANDLE
0 ☐	0 ☐	0 ☐
1 203mm (8") Wallform (S2) Swing Spout (2) ☐ 	1 ☐	1 Five Flute Handles ☐ 
2 203mm (8") Tubular (S5) Swing Spout (2) ☐ 	2 Vandal Resistant 1.5 GPM (5.7 L/min.) Laminar w/Agion® Antimicrobial ☐ 	2 102mm (4") Hooded Blade Handles (5) ☐ 
3 152mm (6") Tubular (S3) Swing Spout (2) ☐ 	3 Vandal Resistant 1.5 GPM (5.7 L/min.) Flow Control Aerator ☐ 	3 76mm (3") Lever Blade Handles (5) ☐ 
4 ☐	4 Standard 1.5 GPM (5.7 L/min.) Flow Control Aerator ☐ 	4 102mm (4") Blade Handles, Sanitary Hoods (5) ☐ 
5 ☐	5 Vandal Resistant 0.5 GPM (1.9 L/min.) Flow Control Non-Aerating Spray Outlet ☐ 	5 152mm (6") Wrist Handles, Sanitary Hoods ☐ 
6 ☐	6 Hose Thread Outlet ☐ 	6 ☐
7 ☐	7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.0 GPM (3.8 L/min.) (3) ☐ 	7 ☐
8 Heavy Duty 114mm (4 1/2") Bend Rigid/Swivel (R2) Gooseneck Spout (1) (4) ☐ 	8 ☐	8 ☐
9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1) (4) ☐ 	9 ☐	9 ☐

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**.

(2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**.

(3) This outlet can ONLY be added to **SPOUT Option No.'s 8 or 9**.

(4) 120° Limited Swing Spout available. Add Suffix **-LS**.

(5) H & C Temperature Indicator Available. Add Suffix **-TI**.

Note: Use this page front and back as a product submittal sheet.

Flow Rates are at 60 PSI.

Refer to www.specselect.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-27T45 Rev. C



TECK®
COMMERCIAL

Cast Deckmount Sink Faucets 4" Centers

Approvals:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Handles No. 2, 3, 4, and 5 meet ADA compliance to ICC/ANSI A117.1/ADA
- Verified compliant with 0.25% weighted average Pb content regulations


(Contact Delta Representative for State and/or Local Approvals.)

HANDLE TEMPERATURE INDICATORS


- ☐ Add suffix **"-TI"** to Product Number for handle temperature indicators "H" (red), "C" (blue).
Available on handle options 2, 3 or 4 only.



FLOW RATE vs PRESSURE

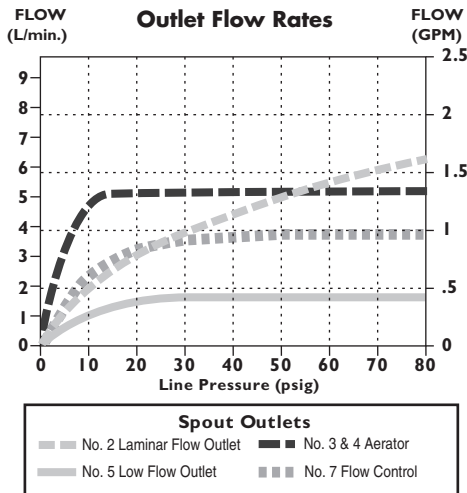


DECK FAUCET

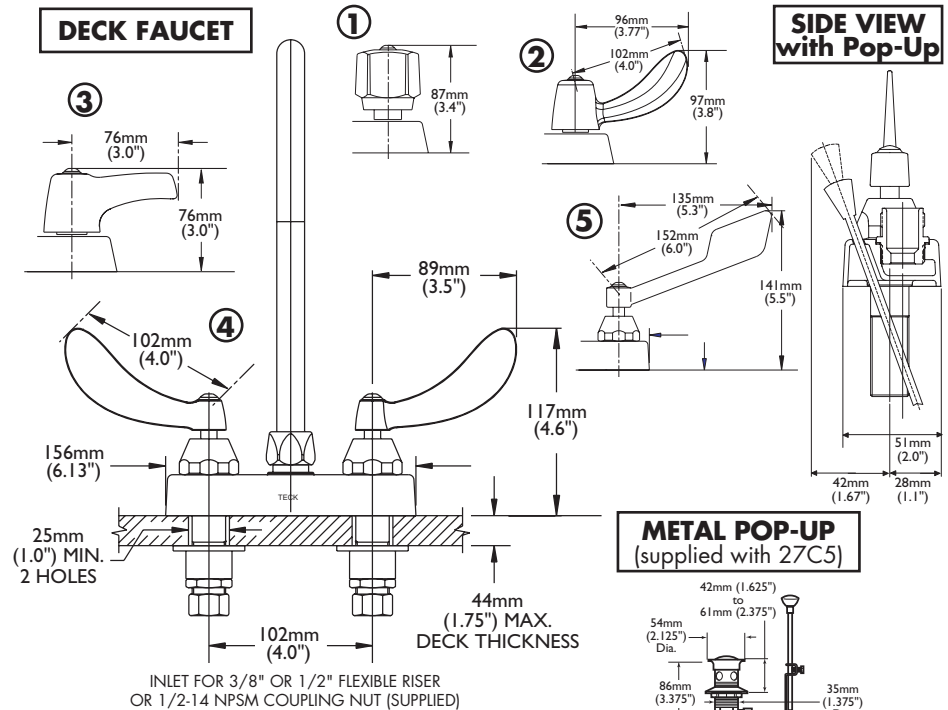

GOOSENECK SPOUTS

Outlets #2, 3, 4, 5, 6 Outlet #7

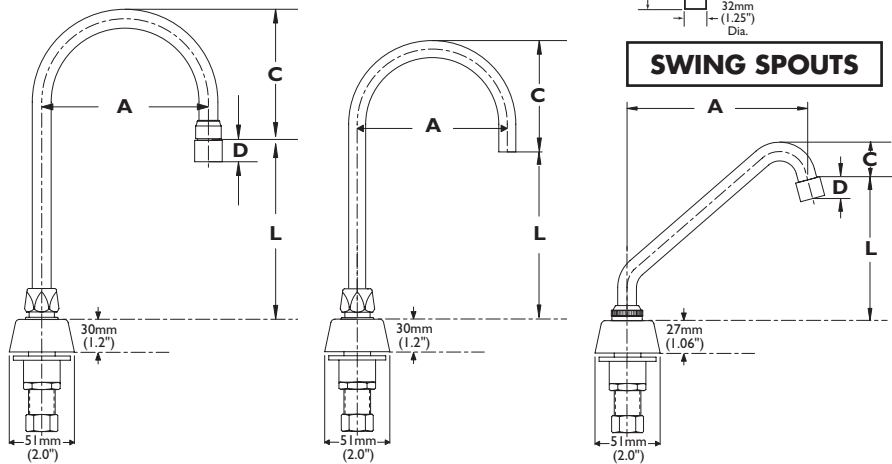

GOOSENECK SPOUT ASSEMBLY #8

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R2) for outlets #2, 3, 4, 5, 6	114	4.5	104	4.1	170	6.7
Gooseneck-Standard (R2) for outlet #7	114	4.5	97	3.8	178	7.0

GOOSENECK SPOUT ASSEMBLY #9

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4, 5, 6	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

LIMITED SWING GOOSENECK

- ☐ Add suffix **"-LS"** to Product Number for 120° Limited Swing

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8
3	6" Tubular Spout (S3)	140	5.5	38	1.5	107	4.2

FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See DSP-R/S for detailed specification (Found in the "Add-On Option" section when using the printed spec binder)

FOR OPTIONAL SWING SPOUTS

See DSP-S/S for detailed specification (Found in the "Add-On Option" section when using the printed spec binder)

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69
6	17	0.67

INLETS - 1/2" MIP/Coupling Nuts Note: Measurements may vary ± 6 mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.