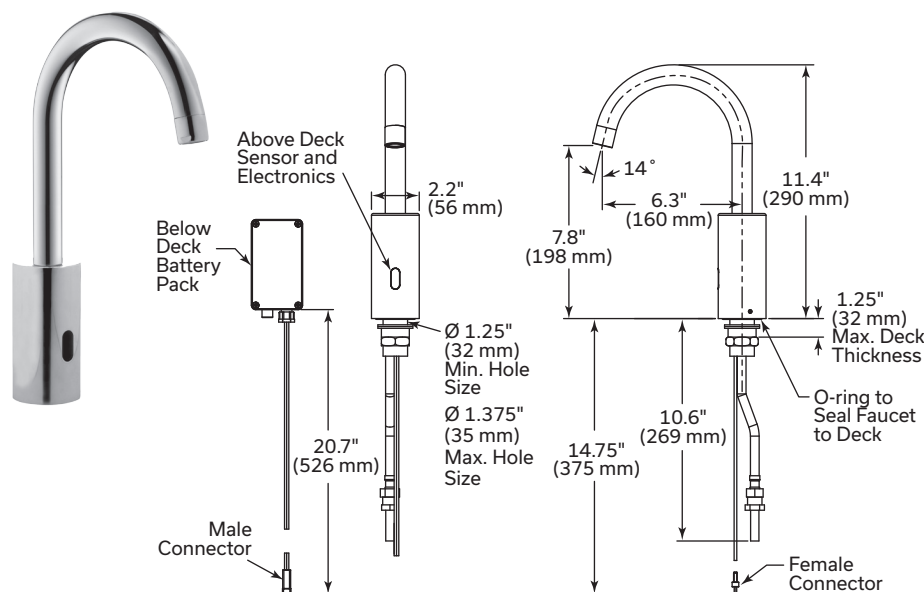
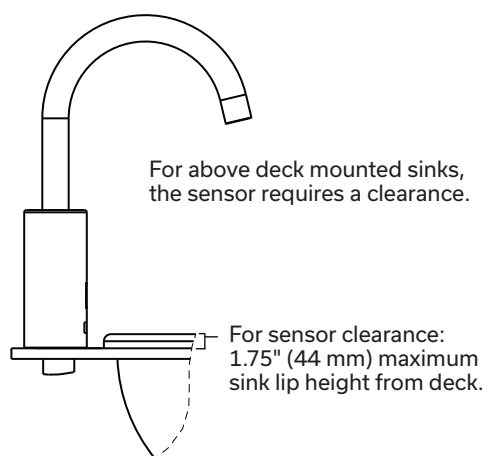


HDF®**DEMD Series Electronic Lavatory Faucets (Infrared)****DEMD-201LF (BATTERY OPERATED WITH NO MIX)****SENSOR CLEARANCE****HARDWARE CONVERSION OF DEMD-200 SERIES****Requires SEPARATE order of either:**

- (A) One 060958A DEMD plug in power supply, output 9VDC plus
One 061014A adaptor kit
- or
- (B) One 060704A hardwire 20VA transformer (120VAC to 24VAC) plus
One 060974A DEMD converter (24VAC to 9VDC) plus
One 061014A adaptor kit

SPECIFICATION: (EXAMPLE)

- Deck mount electronic lavatory faucet
- Sensor detects user's hand to activate water flow
- Six 1.5V batteries (included)
- Above deck electronics
- Red light indicator blinks when battery is low

DEMD-201 SERIES

- Electronic faucet for cold or pre-mixed water

☐ **DEMD-201LF (Chrome)**
0.5 gpm (1.9 L/min) spray outlet

☐ **DEMD-201LF-NS (Nickel Stainless)**
0.5 gpm (1.9 L/min) spray outlet

OPERATION**SENSING RANGE:**

- Factory set to 8.0" ± 1.5" (200 mm ± 40 mm)
- Adjustable from 3.15" to 11.8" (80 mm to 300 mm) with optional remote control

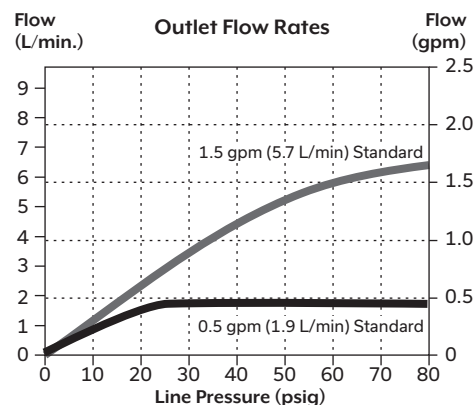
MAXIMUM RUN TIME:

- 90 seconds, adjustable with remote control

OPTIONAL ACCESSORIES (ORDER SEPARATELY)

- ☐ **060967A**
Remote Control – allows adjustment of sensor range, maximum run time, delayed close time, temporary shutoff for cleaning and factory settings reset

NOTICE Designed for routine 180° F (82°C) disinfection cycles up to 30 minutes.

FLOW RATE VS PRESSURE**APPROVALS:**

- Certified to ASME A112.18.1/CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

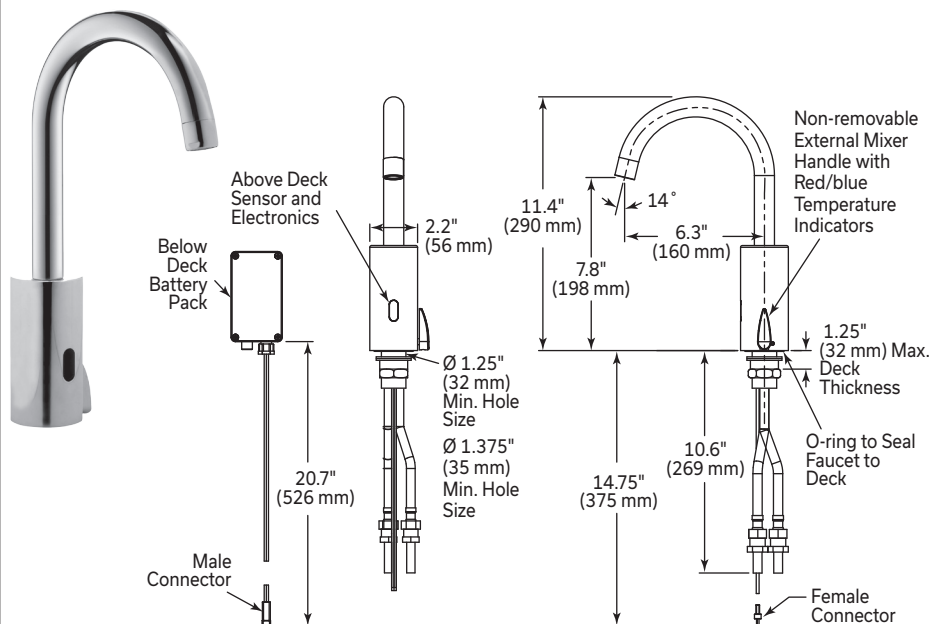
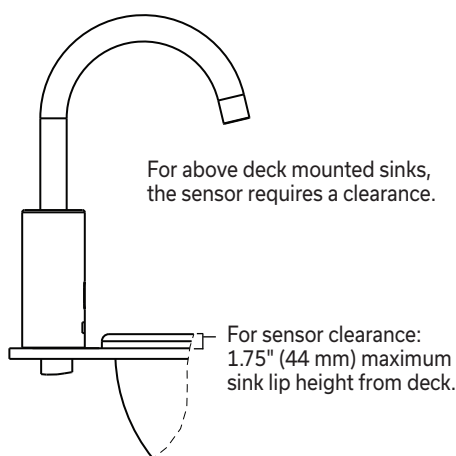
NOTICE Measurements may vary ± 0.25" (6 mm)

Refer to www.specselect.com for individual models.

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

NOTICE Flow Rates are at 60 PSI. Use all pages as product submittal sheets.

DSP-DEMD-200, Rev L

HDF®**DEMD Series Electronic Lavatory Faucets (Infrared)****DEMD-21ILF (BATTERY OPERATED WITH USER MIX)****SENSOR CLEARANCE****HARDWIRE CONVERSION OF DEMD-200 SERIES**Requires **SEPARATE** order of either:

- (A) One 060958A DEMD plug in power supply, output 9VDC plus
One 061014A adaptor kit
- or
- (B) One 060704A hardwire 20VA transformer (120VAC to 24VAC) plus
One 060974A DEMD converter (24VAC to 9VDC) plus
One 061014A adaptor kit

SPECIFICATION: (EXAMPLE)

- Deck mount electronic lavatory faucet
- Sensor detects user's hand to activate water flow
- Six 1.5V batteries (included)
- Above deck electronics
- Red light indicator blinks when battery is low

DEMD-211 SERIES

- Electronic faucet with mixer to adjust temperature

- ☐ **DEMD-21ILF (Chrome)**
0.5 gpm (1.9 L/min) spray outlet
- ☐ **DEMD-21ILF-NS (Nickel Stainless)**
0.5 gpm (1.9 L/min) spray outlet
- ☐ **DEMD-21I-15LF (Chrome)**
1.5 gpm (5.7 L/min) Careguard® laminar outlet

OPERATION**SENSING RANGE:**

- Factory set to 8.0" ± 1.5" (200 mm ± 40 mm)
- Adjustable from 3.15" to 11.8" (80 mm to 300 mm) with optional remote control

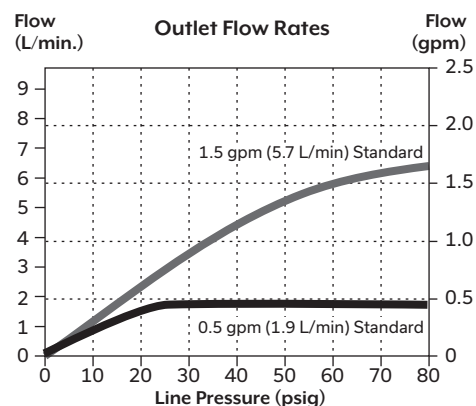
MAXIMUM RUN TIME:

- 90 seconds, adjustable with remote control

OPTIONAL ACCESSORIES (ORDER SEPARATELY)

- ☐ **060967A**
Remote Control - allows adjustment of sensor range, maximum run time, delayed close time, temporary shutoff for cleaning and factory settings reset

NOTICE Designed for routine 180° F (82°C) disinfection cycles up to 30 minutes.

FLOW RATE VS PRESSURE**APPROVALS:**

- Certified to ASME A112.18.1/CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

NOTICE Measurements may vary ± 0.25" (6 mm)

Refer to www.specselect.com for individual models.

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Flow Rates are at 60 PSI.

NOTICE Use all pages as product submittal sheets.

DSP-DEMD-200, Rev L