



T17TH Series - MultiChoice® Universal Thermostatic Shower System

T17TH125

Description

Introducing the TempAssure® 17T Thermostatic Cartridge, featuring a thermostatic wax element that maintains the outlet temperature with remarkable precision, ensuring deviations of only +/- 3.6° F (15.8° C). The cartridge features a polished chrome-plated finish, and its temperature markings are non-removable red/blue indicators for clear guidance. With a minimum flow rating of 1.2 gpm @ 45 psi (4.5 L/min @ 310 kPa), this cartridge ensures efficient water flow. Handle #5 is an ADA compliant Metal Lever Volume Control Handle with a Field Adjustable Temperature Dial, allowing adjustments to limit rotation into the hot water zone for added safety. Shower #2 includes a 3-Setting Touch-Clean Shower Head, Arm, and Flange. Maximum flow rate stands at 1.75 gpm @ 80 psi (6.6 L/min @ 552 kPa), while the minimum flow rate is 1.5 gpm @ 45 psi (5.7 L/min @ 310 kPa).

Specifications

- Cartridge: TempAssure® 17T Thermostatic
- Thermostatic wax element: Maintains the outlet temperature to +/- 3.6° F (15.8° C)
- Finish: Polished Chrome Plated
- Temperature markings: Non-removeable red/blue markings
- Cartridge Minimum Flow Rating: 1.2 gpm @ 45 psi (4.5 L/min @ 310 kPa)
- Handle #5: ADA compliant Metal Lever Volume Control Handle, Field Adjustable Temperature Dial to limit rotation into the hot water zone
- Shower #2: 3-Setting Touch-Clean Shower Head, Arm, and Flange
- Shower #2 - Flow Rate Max. - 1.75 gpm @ 80 psi (6.6 L/min @ 552 kPa)
- Shower #2 - Flow Rate Min. - 1.5 gpm @ 45 psi (5.7 L/min @ 310 kPa)

Required Accessories

- Rough-in - **R10000-UNWS** - ordered separately



Complies With

- ASME A112.18.1 / CSA B125.1
- Pressure Balance and Diverter lever handles are compliant to ICC / ANSI A117.1
- EPA WaterSense® listed
- Thermostatic Valve complies with ASSE 1016



Lever Handle
Only
Poignée à levier
seulement

(Contact Delta Representative for State and/or Local Approvals)

WaterSense® is a registered trademark of the U.S. Environmental Protection Agency.

Max. flow rates are at 80 psi (552 kPa), Min. flow rates @ 45 psi (310 kPa)


Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

T17TH125

This specification sheet was produced on December 19, 2023.

T17TH125

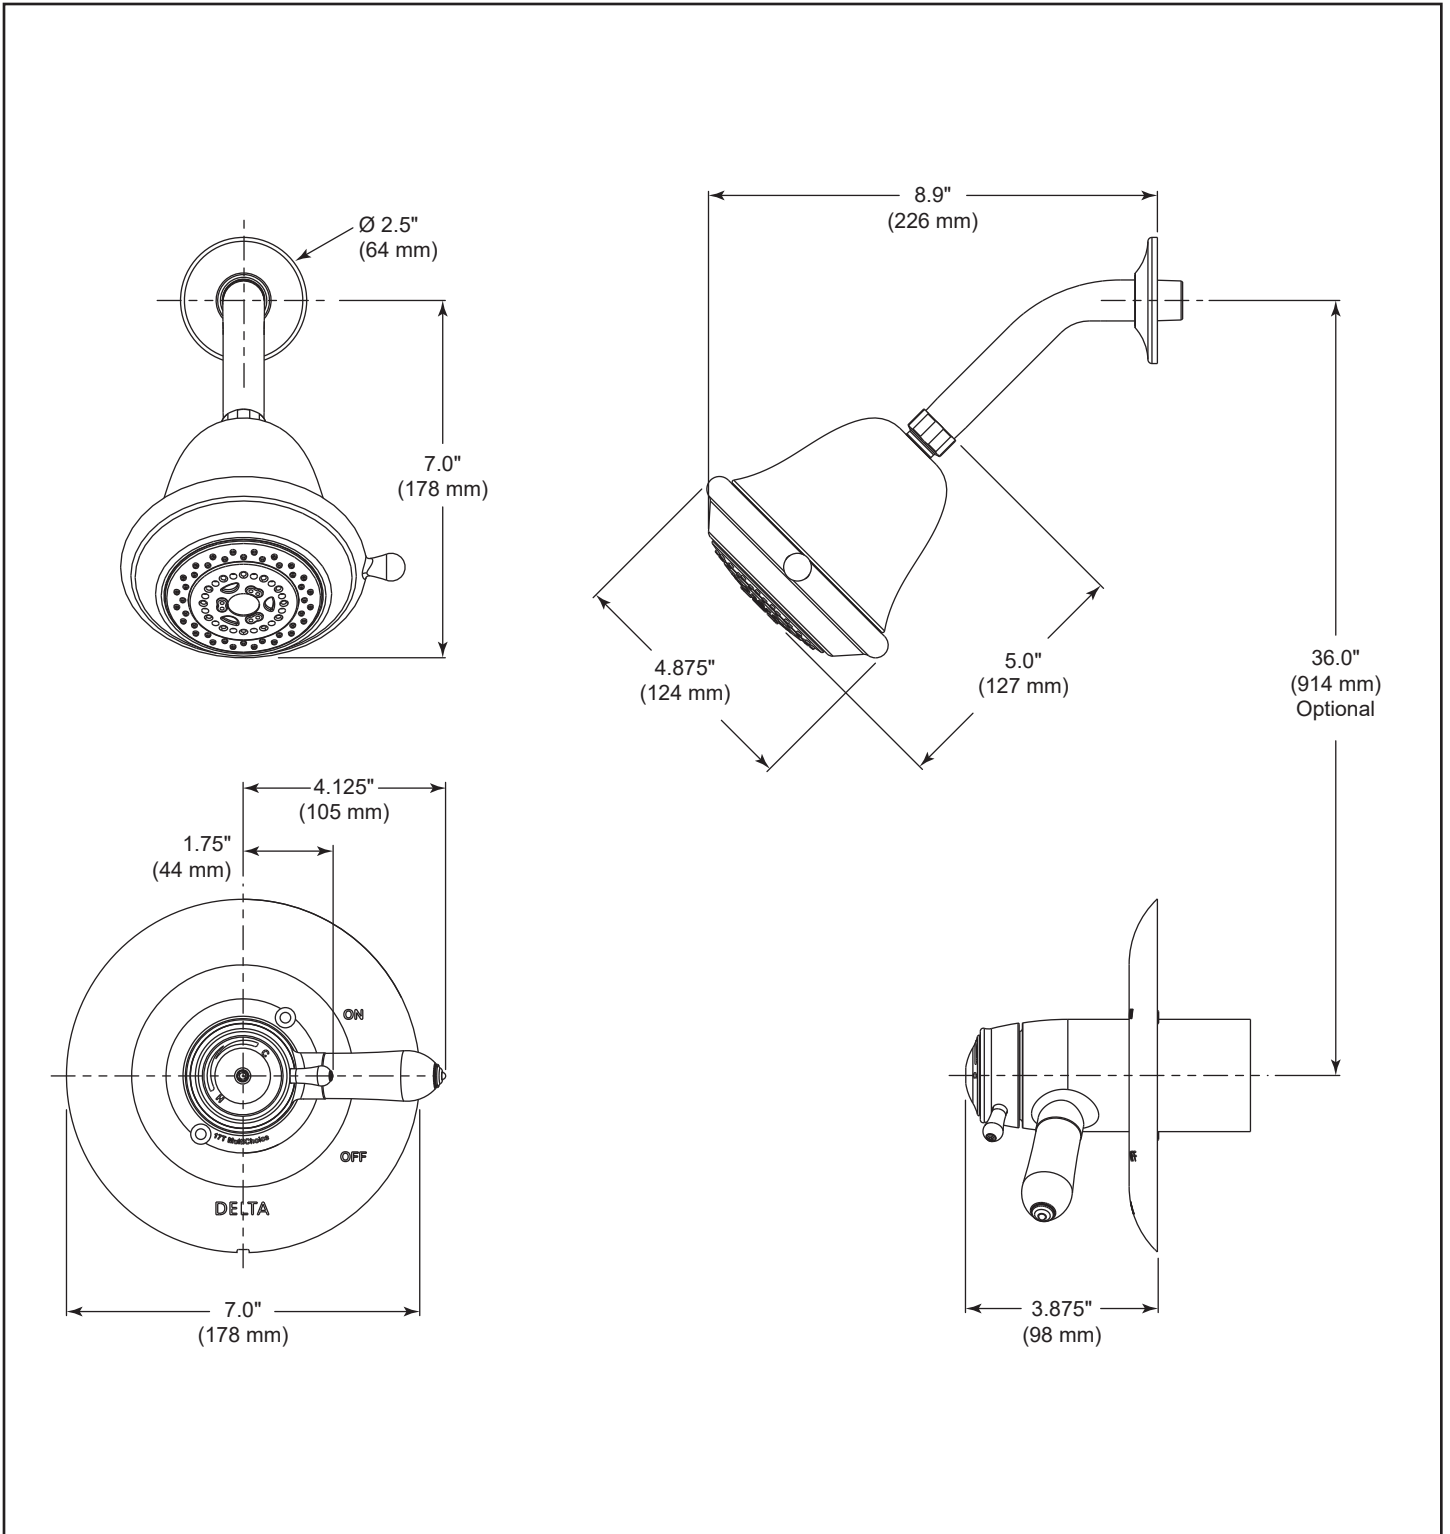

NOTICE • Dimensions are for reference **ONLY**.
• Measurements may vary $\pm 0.25"$ (6 mm).

WaterSense® is a registered trademark of the U.S. Environmental Protection Agency.

Max. flow rates are at 80 psi (552 kPa), Min. flow rates @ 45 psi (310 kPa)

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

T17TH125

This specification sheet was produced on December 19, 2023.