




PRODUCT CATALOG

ISSUE 21



1

PADS

29

**AIR
MOVEMENT**

37

**HEATING
PRODUCTS**

47

**CONDENSATE
MANAGEMENT**


77

**GENERAL
INDUSTRIAL**


89

DEVCO

123

ELECTRICAL

159

TOOLS

181

PLUMBING

193

**DUCTLESS
SYSTEMS**


205

**MAINTENANCE
CHEMICALS**

231


**INLINE
COMPONENTS**

247

**DISTRIBUTOR
SUPPORT**

PADS

Anti-Vibration Pads.....	28
Cladlite® Lightweight Equipment Pads.....	22
E Lite® Plastic Equipment Pads.....	21
Enviropad™.....	25
Heat Pump Pads.....	25
Heat Pump Risers.....	26
Hef-T-Pad™.....	24
Mounting Bracket and Blocks.....	26-27
The Black Pad®.....	24
Theft Prevention	28
The Hurricane Pad™.....	23
Ultralite® Lightweight Concrete Equipment Pads...	20-21

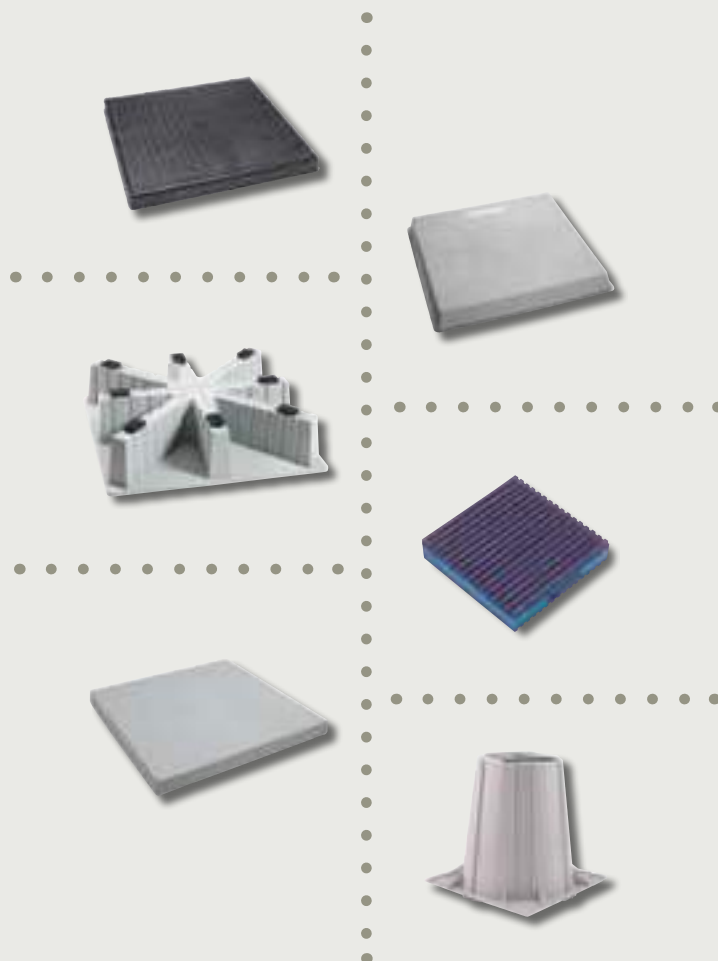

E Lite® Plastic Equipment Pads

E Lite® is a plastic pad designed as a mounting base for air conditioning condensers. The rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. E Lite® is injection molded from polypropylene, resulting in a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with its size in raised letters.



TECHNICAL DATA

MATERIAL

Polypropylene

FREEZE/THAW

Flawless performance under the 25-cycle regimen specified by ASTM C67

CHEMICAL RESISTANCE

Does not crack, flake, or warp when tested per ASTM D2299 with the following:

- R-22 and R-134a
- Synthetic canine urine
- Compressor oil
- Salt solution, 20% by volume



Each pad is molded with its size in raised letters.

FEATURES AND BENEFITS

- Lightweight, yet rugged
- Drillable for securing unit
- Uniform ribbing transfers load evenly
- Unaffected by UV or weather
- Subtle texture resists unit slide



The bottom of a 2" E Lite® pad shows extensive ribbing.



The bottom of a 3" E Lite® pad shows ribbing plus additional surface support.



E Lite® plastic equipment pads are manufactured at DiversiTech's Conyers, Georgia plant.

Hef-T-Pad™ Equipment Pads

Hef-T-Pad™ is an injection molded equipment pad created from high impact polypropylene with UV inhibitors making it easy to handle, yet durable and strong. It does not require any additional equipment for moving and handling. Hef-T-Pad™ is resistant to impact, ultraviolet degradation and weathering and will not crack, flake, or warp. It is virtually impervious to climatic variations. Hef-T-Pad™ is drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to be easily secured to the pad.



FEATURES AND BENEFITS OF THE HEF-T-PAD™

Stabilization foot increases the surface area for bearing stabilization on soil; reduces sinking in soft soil under heavy load. Support ribs provide structural support.



STABILIZATION FOOT

Stabilization flange provides a wide perimeter that reduces sinking in soft soil under heavy load. Both the flange and ribbing provide reinforcement for the corners.



STABILIZATION FLANGE

The thick walled polymer is suitable for drilling and screw fastening of equipment, line sets, and electrical connections.



DRILLABLE

Attractive neutral gray color with pad size and branding clearly embossed on pad surface.



NEUTRAL GRAY COLOR

Textured surface provides good aesthetics and a non-skid surface.



TEXTURED SURFACE

Pad size is molded into the side of the pad as well as the top surface.




PAD SIZE


The Black Pad® replaces Concrete Equipment Bases

Eco-friendly

An innovative equipment base, The Black Pad® uses ground, recycled rubber in a co-injection process. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad® is ideal for pool and spa pumps, filters and heaters. The Black Pad® is extremely weather resistant and easy to drill and secure pool and spa equipment.

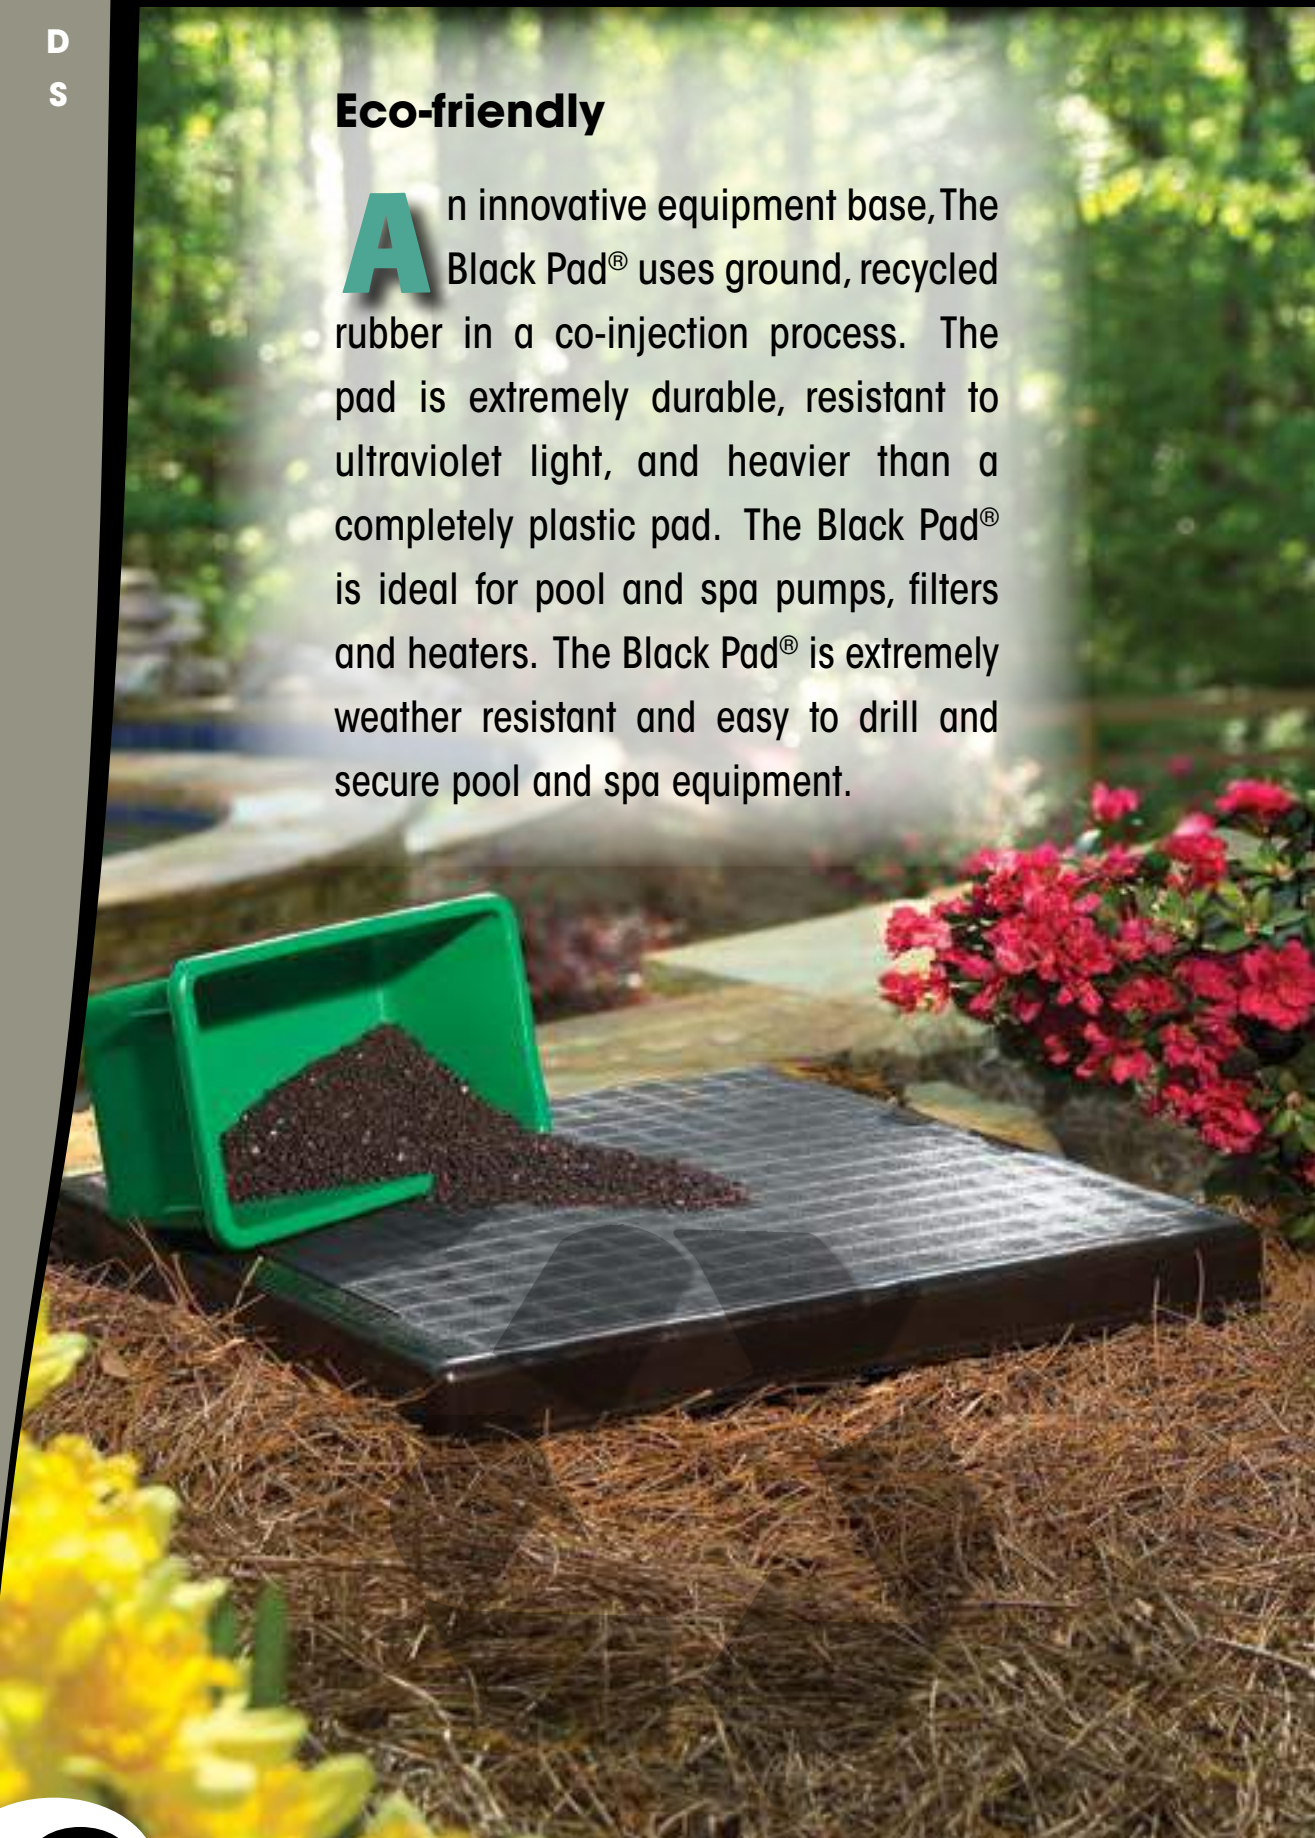

- No cracking and less breakage than concrete
- Extremely durable, yet lightweight
- UV resistant; unaffected by weather
- Generous ribbing for optimum, self-leveling ground support
- Outer edges have rounded corners with double-thick walls
- Uniform ribbing transfers load evenly
- Textured surface prevents equipment slippage
- Drillable for securing equipment
- Made of recycled material
- ICC Certified to Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.

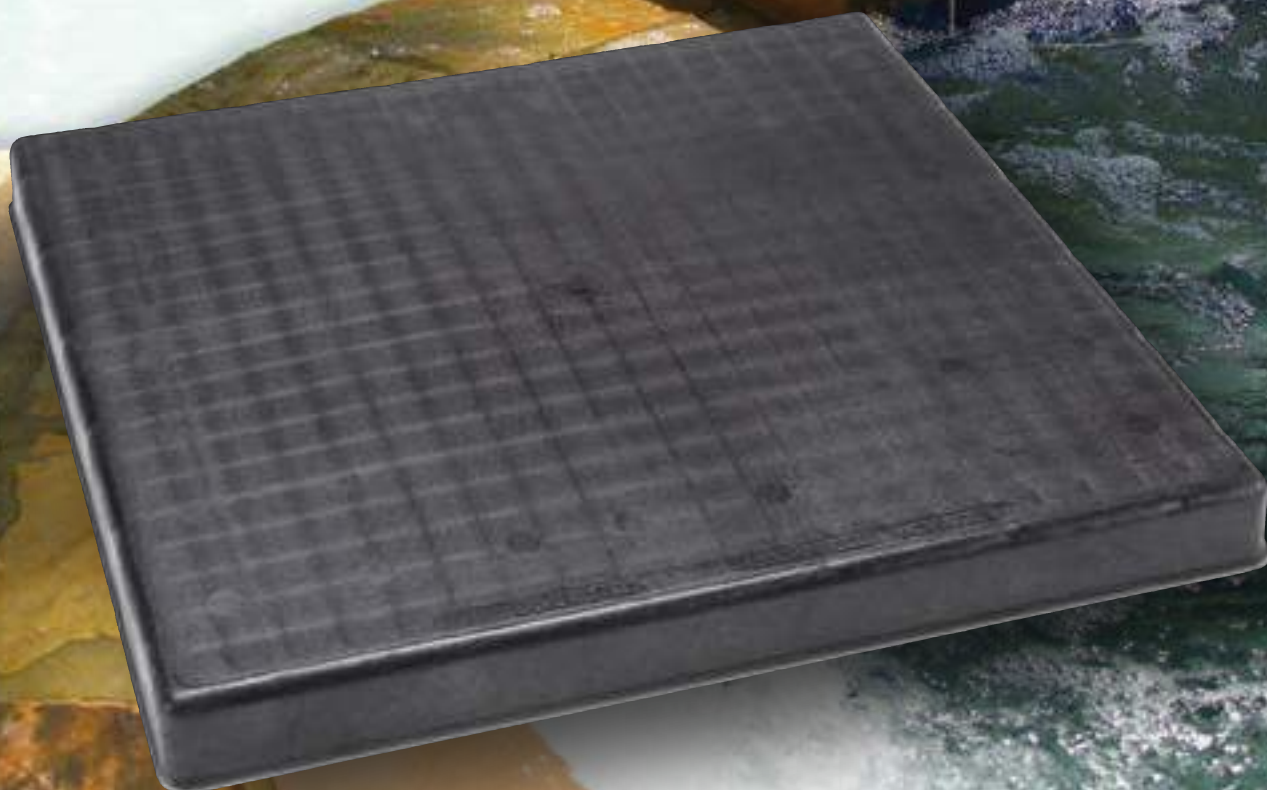

UltraLite® Equipment Pads



UltraLite® Pads are made by DiversiTech, North America's largest manufacturer of equipment pads.

FEATURES AND BENEFITS

LIGHTWEIGHT At an average weight of 2-1/2 pounds per square foot (12 kg. per square metre), the UltraLite lightweight concrete pad is one of the lightest equipment mounting products available today. Lightweight products are important for ease of handling on job site.

DURABLE The exterior of the UltraLite lightweight concrete pad is specifically engineered for long-term exterior weather resistance.

DUCTILE The skin and core of the UltraLite lightweight concrete pad is specifically engineered for flexibility and ductility demanded of job site handling. Additionally, the ductility of the outer skin facilitates conformance to slight ground contours without fracture.

TIME/LABOR SAVINGS Time is money, and hence any time savings on site translates into money saved. The UltraLite lightweight concrete pad literally installs in seconds while providing a solid foundation for the condensing unit.

CONCRETE SURFACE The concrete external skin of the UltraLite lightweight concrete pad is not subject to ultraviolet degradation or weathering discoloration.

VIBRATION ABSORBING The engineered polystyrene core in the UltraLite lightweight concrete pad absorbs and dampens vibration associated with normal operation of a condensing unit.

FREEZE/THAW RESISTANT The UltraLite lightweight concrete pad is vapor permeable. Water vapor evaporates through the pad, hence the concrete outer skin is not subject to expansion cracks.

FLAME RESISTANT The concrete outer skin of the UltraLite lightweight concrete pad is resistant to heating caused by the compressor. Additionally, the surface is resistant to heat from incidental torch flame during site installation.

OUTSIDE STORAGE The UltraLite lightweight concrete pad is intended for life in the outdoors. As such, the pad is suitable for exterior storage prior to site installation.

TECHNICAL DATA

LOADING

To achieve the maximum permissible pad load capacity, the earth under the pad must be capable of supporting the transmitted compression load of the UltraLite pad. All values tabulated assume the earth has a bearing capacity of at least 1000 pounds per square foot (48 kPa).

The allowable loads assume a uniformly distributed loading on the pad surface (that is, a relatively flat-bottomed condenser unit in contact with the pad). For condenser units with footpads or other point loads, the maximum concentrated load for any size UltraLite pad is 125 pounds per 2" (56 kg per 50 mm) diameter (or equivalent surface area) footpad.

CHEMICAL RESISTANCE

In normal usage conditions an equipment pad can be exposed to a variety of chemicals. The UltraLite pad has been fully tested in accordance with ASTM D2299 for resistance against:

- R-22 and R-134a
- Compressor oil
- Salt solution, 20 percent by volume
- Synthetic canine urine

The UltraLite pad performs extraordinarily well under these testing criteria. UltraLite does not craze, soften, delaminate, or spall under exposure in this test.

FREEZE/THAW TESTING

The UltraLite pad has been independently tested to the rigorous freeze-thaw regimen specified by ASTM C67. This standard dictates a twenty-five cycle freeze-thaw sequence. The freeze portion of the sequence takes place with the top surface of the UltraLite pad under 1/2" (12 mm) of water. Once twenty-five cycles are complete, the pad is examined using visual magnification. No cracks or crazing is permitted. UltraLite has performed flawlessly.



CladLite® Equipment Pads



Tough. Durable. Strong.

CladLite® Equipment Pads provide the strength and durability customers demand in an easy to install pad. CladLite® Pads are up to 80% lighter than solid concrete but still provide rock solid support for equipment. Once it's set, so are you. CladLite® Pads stay in place and can withstand anything mother nature can throw at them. These pads provide superior resistance to sun, moisture, and freeze-thaw conditions. And the vibration dampening EPS foam core is unaffected by water, soil, fungus or bacteria. Cladlite® Pads are available in 2" and 3" thickness and more than 70 different sizes so you can get the exact pad you need for the job. Get the concrete pads that homeowners prefer – Cladlite®.

CLADLITE® SPECIFICATIONS

Allowable Load: 125 lbs. per 2" diameter foot

Freeze/Thaw: Flawless performance under the 25-cycle regimen specified by ASTM C67

Chemical Resistance: Does not craze, soften, delaminate, or spall when tested per ASTM D2299 with the following:

- R-22 and R-134a
- Compressor oil
- Synthetic canine urine
- Salt solution, 20% by volume

Foam Core: ASTM Type 1 EPS

Flame Resistance:

Cladding resists compressor heat and incidental torch contact.

Not to be used under heating devices.



Heat Pump Pad™




Ideal for snowy climates, the new DiversiTech Heat Pump Pad™ is the perfect solution for protecting equipment and ensuring proper operation year round. The Heat Pump Pad™ provides

a full 8" clearance from ground level in a compact square footprint. Included with every Heat Pump Pad™ are 8 anti-vibration pads, specifically molded into slots in the pad to reduce vibration and provide quiet operation of your equipment. The base of the pad is also angled to direct melting snow or condensate away from the unit and pad. Heat Pump Pads are made from recycled polypropylene so they are eco-friendly and are built tough to provide many years of service. These pads also nest together for easier transportation and warehousing.

Each Heat Pump Pad™ includes eight Anti-Vibration pads fitted into special slots in the risers to reduce equipment vibration and noise.



Stackable!

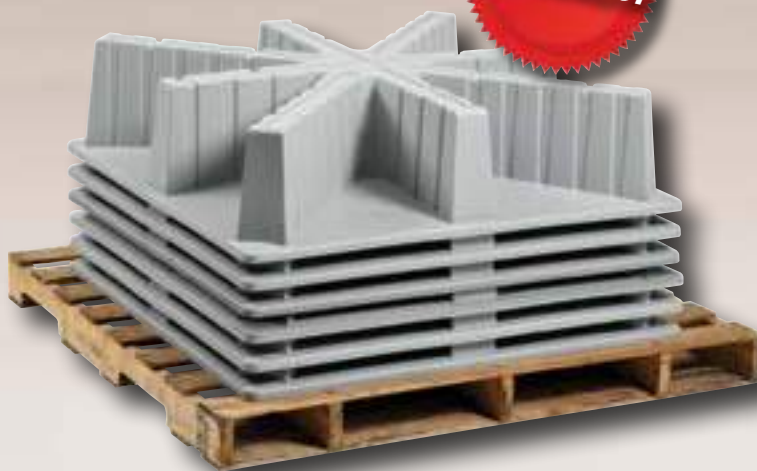



The Hurricane Pad™

THE HURRICANE PAD™ CONCRETE EQUIPMENT PAD

Hurricane strength equipment pads designed to Florida's tough standards.

DiversiTech's family of Hurricane Pads provide complete protection when the weather turns the worst. Three different models and dozens of sizes of The Hurricane Pad ensure you have the right pad for any area or need. Each DiversiTech Hurricane Pad includes these features:

- Steel reinforced
- 3,000 psi minimum concrete, mandatory to meet strict anchor pullout requirements
- Easier to install
- Will not float (unlike air filled pads)
- Uses standard Tapcon™ brand screws and no inserts are necessary
- Superior screw pullout strength



FLORIDA BUILDING CODE NOTICE

This product meets the following Florida Building Code requirements:

1. Florida Building Commission (DCA02-DEC-183) declares this pad to be an acceptable alternative material to solid concrete pads.
2. This pad meets Mechanical Volume, Section 304.10 – clearance from grade.
3. Pad weight and wind load requirements have been calculated by Master Consulting Engineers. For up to date calculations and documentation, visit our website: www.diversitech.com.

THE HURRICANE PAD™

The Hurricane Pad is designed for installations up to 150 MPH. The Hurricane Pad provides a solid base for mounting and protecting equipment threatened by adverse conditions.



THE HURRICANE PAD™ T CLASS

The Hurricane Pad T-Class is designed for even higher wind loads - up to 175 MPH. Ideal for south Florida counties and other heavily threatened areas, the T Class Hurricane Pads are heavier and provide additional concrete for superior anchor pullout strength.



THE HURRICANE PAD™ MD

The ultimate in protection, The Hurricane Pad MD is specifically designed for the strict regulations of Miami-Dade county. These solid concrete pads meet the Florida Building Code Notice and can withstand winds up to 175 MPH. This pad is made from a minimum 7000PSI solid concrete.




Equipment must be properly attached to The Hurricane Pad™ in order to prevent sliding and tipping in high winds.

Anti-Vibration Pads

EVA™ PAD: The BEST Performer



EVA™ (Extreme Vibration Attenuation) is the latest generation in vibration dampening technology. In the most severe vibration extremes, testing shows the EVA™ pad outperforms cork and rubber by greater than 3:1 and outperforms our competitor's "waffle" pad by greater than 8:1! The enhanced performance comes from the special composite foam center which is structurally more sound than cork. EVA™ is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. Designed to withstand 50 psi. Choose EVA™ to get the best of both worlds!

ANTI-VIBRATION PAD PERFORMANCE

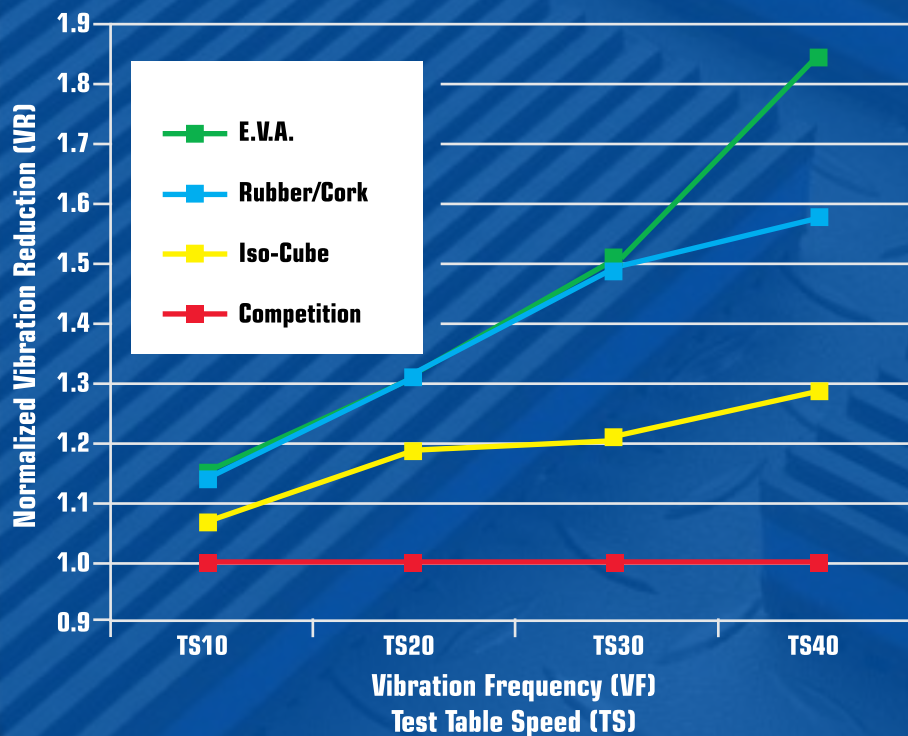

RUBBER/CORK PAD: The Industry Standard

These pads are made with the highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides and laminated to the cork center.

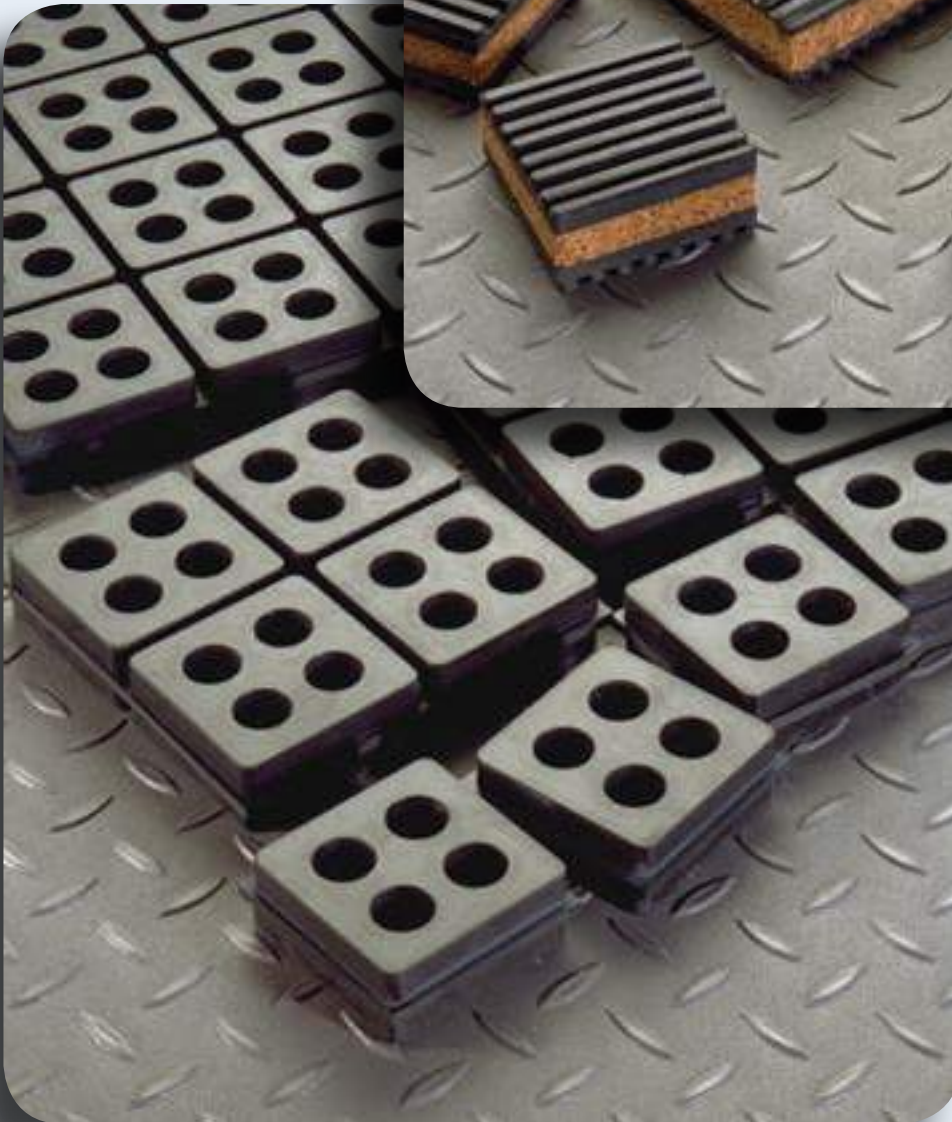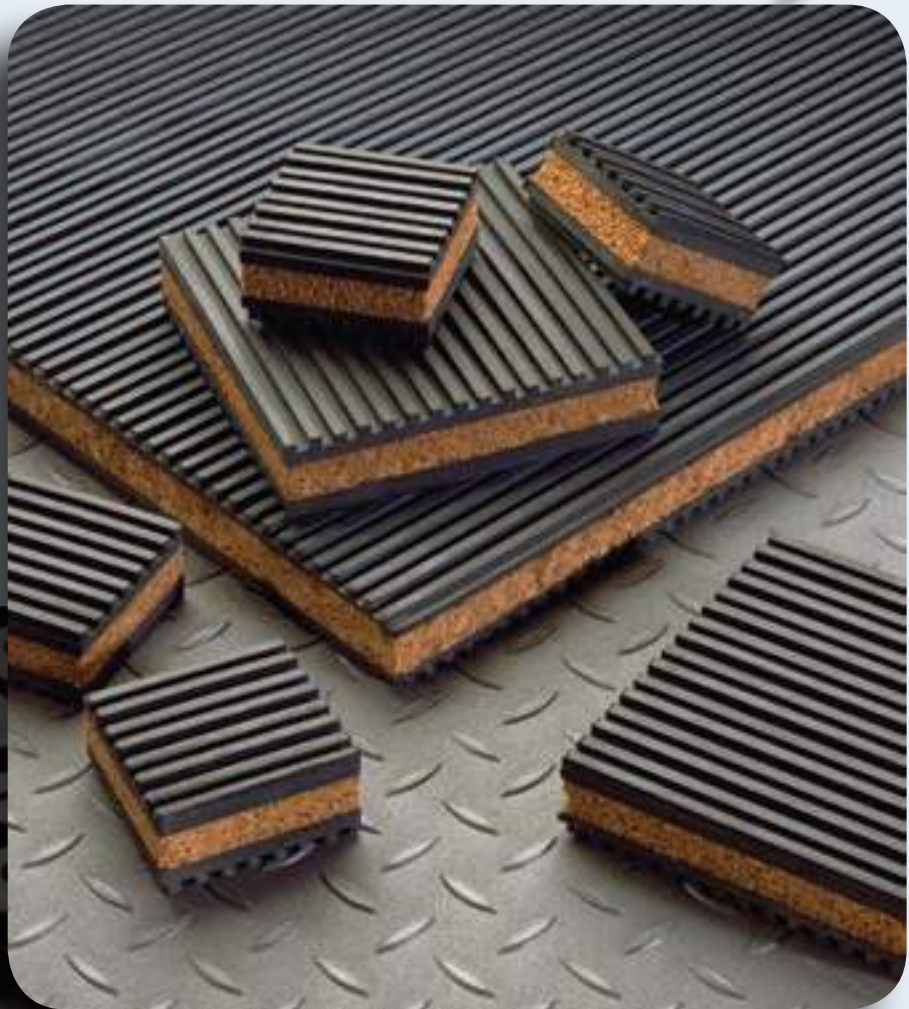

ISO-CUBE: Solid Rubber Tough

Natural rubber pads designed to reduce vibration and noise emanating from refrigeration or AC equipment. Circular design offers a suction cup effect eliminating the need to bolt the pads down. A standard 18" pad divides into eighty-one 2" segments which may be cut or torn into smaller pads. The 50 durometer pads will withstand a load of 180 psi with great resiliency.

A/C Brackets

DiversiTech offers a complete selection of quality air conditioning brackets for standard and mini-split condensing units.



AIR CONDITIONING BRACKETS

These heavy duty 1/8" thick steel A/C brackets are perfect for hanging A/C condensers and heat pumps outside the home.

Hef-T-Block™



HEF-T-BLOCK™

For use as mounting bases when condensing units must be bolted down. End caps are also available for aesthetics.



Hef-T-Bracket™



HEF-T-BRACKET™ TYPE 2

These brackets feature a cross bar that is attached to a wall and two L-shaped brackets that are hooked and bolted into place on the cross bar.



When operating in heat pump mode, the unit will produce condensate which is easily captured and managed using this snap on drain pan.

ULTRALITE® LIGHTWEIGHT CONCRETE EQUIPMENT PADS


A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered encapsulated polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.

2" UltraLite® Pads

The 2" thick UltraLite® pad is the industry standard. Used across a wide variety of applications, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-2	16 X 36	11	20	250	EA	20
UC2424-2	24 X 24	15	20	323	EA	20
UC2430-2	24 X 30	17	20	361	EA	20
UC2436-2	24 X 36	22	20	455	EA	20
UC2448-2	24 X 48	18	20	385	EA	20
UC2626-2	26 X 26	17	20	365	EA	20
UC2628-2	26 X 28	19	20	397	EA	20
UC3030-2	30 X 30	21	20	441	EA	20
UC3036-2	30 X 36	27	20	571	EA	20
UC3040-2	30 X 40	30	20	617	EA	20
UC3143-2	31 X 43	26	20	551	EA	20
UC3232-2	32 X 32	24	20	501	EA	20
UC3234-2	32 X 34	23	20	485	EA	20
UC3434-2	34 X 34	23	20	493	EA	20
UC3445-2	34 X 45	45	20	915	EA	20
UC3636-2	36 X 36	27	20	555	EA	20
UC3640-2	36 X 40	29	20	608	EA	20
UC3648-2	36 X 48	35	20	725	EA	20
UC3842-2	38 X 42	30	20	625	EA	20
UC4040-2	40 X 40	32	20	644	EA	20


U.S. Patents 7,334,385; 7,232,589; 6,931,822; 6,927,183; 5,728,458; 5,664,394; 5,268,226; 5,209,968, and patents pending. ICBO PFC-5112.



UC2424-2

3" UltraLite® Pads

Where local codes supersede the International code and require a pad thicker than 2" — 3" UltraLite® is the solution.



UC2424-3

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1636-3	16 X 36	18	15	297	EA	15
UC1838-3	18 X 38	18	15	297	EA	15
UC2424-3	24 X 24	18	15	294	EA	15
UC2430-3	24 X 30	21	15	339	EA	15
UC2436-3	24 X 36	26	15	412	EA	15
UC2442-3	24 X 42	28	15	441	EA	15
UC2448-3	24 X 48	28	15	443	EA	15
UC2626-3	26 X 26	17	15	279	EA	15
UC2838-3	28 X 38	30	15	471	EA	15
UC3030-3	30 X 30	23	15	370	EA	15
UC3036-3	30 X 36	30	15	471	EA	15
UC3040-3	30 X 40	33	15	517	EA	15
UC3048-3	30 X 48	40	15	625	EA	15
UC3232-3	32 X 32	26	15	411	EA	15
UC3237-3	32 X 37	27	15	436	EA	15
U3353-3	33 X 53	68	15	1,045	EA	15
UC3434-3	34 X 34	27	15	427	EA	15
UC3445-3	34 X 45	39	15	612	EA	15
UC3636-3	36 X 36	34	15	528	EA	15
UC3642-3	36 X 42	32	15	510	EA	15
UC3648-3	36 X 48	37	15	579	EA	15
U3650-3	36 X 50	38	15	595	EA	15
U3654-3	36 X 54	71	15	1,096	EA	15
U3660-3	36 X 60	49	15	767	EA	15
U3678-3	36 X 78	99	15	1,510	EA	15
UC3842-3	38 X 42	35	15	550	EA	15
U3865-3	38 X 65	85	15	1,300	EA	15
U3870-3	38 X 70	113	15	1,720	EA	15
UC4040-3	40 X 40	34	15	510	EA	15
UC4042-3	40 X 42	36	15	565	EA	15
U4054-3	40 X 54	81	15	1,240	EA	15
UC4347-3	43 X 47	60	15	925	EA	15
U4550-3	45 X 50	81	15	1,240	EA	15
U4558-3	45 X 58	93	15	1,420	EA	15
U4848-3	48 X 48	85	15	1,300	EA	15
U4854-3	48 X 54	91	15	1,390	EA	15
U4866-3	48 X 66	108	15	1,645	EA	15
U5053-3	50 X 53	92	15	1,405	EA	15
U5056-3	50 X 56	97	15	1,480	EA	15
U5075-3	50 X 75	130	15	1,975	EA	15
U5079-3	50 X 79	145	15	2,200	EA	15
U5252-3	52 X 52	94	15	1,435	EA	15
U5260-3	52 X 60	109	15	1,660	EA	15
U5557-3	55 X 57	109	15	1,660	EA	15
U6067-3	60 X 67	134	15	2,035	EA	15

ULTRALITE® LIGHTWEIGHT CONCRETE EQUIPMENT PADS *cont'd***3" UltraLite® Wedge Pads**

The UltraLite® Wedge Pad is designed for Lennox condensing units.



UC3132-3L

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC3132-3L	31 X 32	23.33	15	350	EA	15
UC3539-3L	35 X 39	33.46	15	502	EA	15
UC4044-3L	40 X 44	37.53	15	563	EA	15

UltraLite® Earthquake Code Compliant Pads

Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes. UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.



UC2424-3CA

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
UC1838-3CA	18 X 38	18	15	273	EA	15
UC2424-3CA	24 X 24	14	15	241	EA	15
UC2436-3CA	24 X 36	22	15	349	EA	15
UC2448-3CA	24 X 48*	28	15	443	EA	15
UC2636-3CA	26 X 36	29	15	428	EA	15
UC3030-3CA	30 X 30	22	15	351	EA	15
UC3036-3CA	30 X 36	25	15	400	EA	15
UC3040-3CA	30 X 40	34	15	510	EA	15
UC3232-3CA	32 X 32	24	15	381	EA	15
UC3445-3CA	34 X 45	33	15	516	EA	15
UC3636-3CA	36 X 36	28	15	441	EA	15
UC3642-3CA	36 X 42	32	15	510	EA	15
UC3648-3CA	36 X 48	37	15	579	EA	15
UC4040-3CA	40 X 40	34	15	510	EA	15

E LITE® PLASTIC EQUIPMENT PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



EL2424-2

3" E Lite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".



EL5658-3

2" E Lite® Pads


The 2" thick E Lite® pad is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL2424-2	24 X 24	7	44	333	EA	44
EL2430-2	24 X 30	9	22	219	EA	22
EL2436-2	24 X 36	11	22	256	EA	22
EL2626-2	26 X 26	8	22	205	EA	22
EL3030-2	30 X 30	11	22	265	EA	22
EL3036-2	30 X 36	13	22	313	EA	22
EL3040-2	30 X 40	15	22	346	EA	22
EL3232-2	32 X 32	13	22	300	EA	22
EL3238-2	32 X 38	15	22	351	EA	22
EL3244-2	32 X 44	17	22	401	EA	22
EL3434-2	34 X 34	14	22	350	EA	22
EL3636-2	36 X 36	16	22	373	EA	22
EL3640-2	36 X 40	18	22	410	EA	22
EL3648-2	36 X 48	29	22	663	EA	22
EL3842-2	38 X 42	19	22	470	EA	22

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EL1838-3	18 X 38	16	16	300	EA	16
EL2424-3	24 X 24	13	16	225	EA	16
EL2430-3	24 X 30	16	16	277	EA	16
EL2436-3	24 X 36	19	16	321	EA	16
EL3030-3	30 X 30	20	16	345	EA	16
EL3040-3	30 X 40	26	16	448	EA	16
EL3232-3	32 X 32	21	16	353	EA	16
EL3238-3	32 X 38	26	16	448	EA	16
EL3244-3	32 X 44	30	16	499	EA	16
EL3636-3	36 X 36	28	16	471	EA	16
EL3640-3	36 X 40	31	16	521	EA	16
EL3648-3	36 X 48	36	16	601	EA	16
EL3842-3	38 X 42	33	16	575	EA	16
EL3870-3	38 X 70	36	16	604	EA	16
EL4040-3	40 X 40	31	16	546	EA	16
EL4558-3	45 X 58	33	16	545	EA	16
EL4848-3	48 X 48	29	16	481	EA	16
EL4872-3	48 X 72	72	16	1,177	EA	16
EL5252-3	52 X 52	48	16	793	EA	16
EL5658-3	56 X 58	43	16	715	EA	16

CLADLITE® LIGHTWEIGHT CONCRETE EQUIPMENT PADS

Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered encapsulated polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. CladLite® is further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.

**2424-2****2" CladLite® Pads**

The 2" thick CladLite® pad is the choice for equipment pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-2	16 X 36	33	25	850	EA	25
2424-2	24 X 24	36	25	913	EA	25
2430-2	24 X 30	37	25	950	EA	25
2436-2	24 X 36	50	25	1,275	EA	25
2442-2	24 X 42	57	25	1,450	EA	25
2448-2	24 X 48	72	25	1,825	EA	25
2454-2	24 X 54	84	25	2,125	EA	25
26-2	26 Round	31	25	800	EA	25
2626-2	26 X 26	38	25	975	EA	25
2636-2	26 X 36	54	25	1,375	EA	25
2660-2	26 X 60	95	25	2,400	EA	25
2838-2	28 X 38	55	25	1,400	EA	25
30-2	30 Round	36	25	925	EA	25
3030-2	30 X 30	48	25	1,225	EA	25
3036-2	30 X 36	60	25	1,525	EA	25
3040-2	30 X 40	70	25	1,775	EA	25
3143-2	31 X 43	83	25	2,100	EA	25
32-2	32 Round	44	25	1,125	EA	25
3232-2	32 X 32	54	25	1,375	EA	25
3237-2	32 X 37	66	25	1,675	EA	25
3434-2	34 X 34	63	25	1,600	EA	25
36-2	36 Round	51	25	1,300	EA	25
3636-2	36 X 36	76	25	1,925	EA	25
3640-2	36 X 40	81	25	2,050	EA	25
3648-2	36 X 48	115	25	2,900	EA	25
3654-2	36 X 54	93	25	2,350	EA	25
3842-2	38 X 42	81	25	2,100	EA	25
4147-2	41 X 47	115	25	2,900	EA	25

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

3" CladLite® Pads

Used where local codes supersede the International code and require a pad thicker than 2".

**2424-3**

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
1636-3	16 X 36	46	20	945	EA	20
2424-3	24 X 24	49	20	995	EA	20
2430-3	24 X 30	57	20	1,165	EA	20
2436-3	24 X 36	63	20	1,285	EA	20
2448-3	24 X 48	71	20	1,445	EA	20
2460-3	24 X 60	105	20	2,125	EA	20
2626-3	26 X 26	53	20	1,085	EA	20
2660-3	26 X 60	109	20	2,205	EA	20
3030-3	30 X 30	62	20	1,265	EA	20
3036-3	30 X 36	71	20	1,445	EA	20
3040-3	30 X 40	94	20	1,905	EA	20
3060-3	30 X 60	130	15	1,975	EA	15
3143-3	31 X 43	74	20	1,505	EA	20
32-3	32 Round	67	20	1,365	EA	20
3232-3	32 X 32	68	20	1,385	EA	20
3237-3	32 X 37	87	20	1,765	EA	20
3345-3	33 X 45	117	20	2,365	EA	20
3465-3	34 X 65	160	15	2,425	EA	15
3636-3	36 X 36	100	20	2,025	EA	20
3640-3	36 X 40	120	20	2,425	EA	20
3648-3	36 X 48	132	20	2,665	EA	20
3650-3	36 X 50	137	15	2,080	EA	15
3660-3	36 X 60	163	15	2,470	EA	15
3678-3	36 X 78	196	10	1,985	EA	10
3842-3	38 X 42	132	20	2,700	EA	20
3865-3	38 X 65	179	15	2,710	EA	15
3870-3	38 X 70	179	10	1,815	EA	10
4042-3	40 X 42	170	10	1,700	EA	10
4054-3	40 X 54	167	15	2,530	EA	15
4062-3	40 X 62	179	10	1,815	EA	10
4147-3	41 X 47	140	15	2,125	EA	15
4183-3	41 X 83	231	10	2,335	EA	10
4550-3	45 X 50	158	15	2,395	EA	15
4558-3	45 X 58	177	15	2,680	EA	15
4766-3	47 X 66	219	10	2,215	EA	10
4848-3	48 X 48	150	15	2,275	EA	15
5053-3	50 X 53	194	15	2,935	EA	15
5056-3	50 X 56	212	10	2,145	EA	10
5058-3	50 X 58	212	10	2,145	EA	10
5070-3	50 X 70	257	10	2,595	EA	10
5252-3	52 X 52	197	10	1,995	EA	10
5557-3	55 X 57	237	10	2,395	EA	10
6067-3	60 X 67	284	10	2,865	EA	10

The Hurricane Pad™

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. For certain taller equipment, The Hurricane T Class Pad™ is needed. Due to their extra weight, standard freight terms only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.



H2424-4

The Hurricane T-Class Pad™

The Hurricane T Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. Due to their extra weight, standard freight terms for The Hurricane T Class Pad™ only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.



HT2424-4

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
H1840-4	18 X 40	16	EA	16
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	16	EA	16
H3030-4	30 X 30	16	EA	16
H3060-4	30 X 60	16	EA	16
H3232-4	32 X 32	16	EA	16
H3345-4	33 X 45	16	EA	16
H3434-4	34 X 34	16	EA	16
H3636-4	36 X 36	16	EA	16
H3642-4	36 X 42	16	EA	16
H3648-4	36 X 48	16	EA	16
H3652-4	36 X 52	8	EA	8
H3654-4	36 X 54	8	EA	8
H3672-4	36 X 72	8	EA	8
H3842-4	38 X 42	8	EA	8
H3852-4	38 X 52	8	EA	8
H3865-4	38 X 65	8	EA	8
H3872-4	38 X 72	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8
H4558-4	45 X 58	8	EA	8
H5557-4	55 X 57	8	EA	8

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HT1840-4	18 X 24	10	EA	10
HT2424-4	24 X 24	5	EA	5
HT2436-4	24 X 36	5	EA	5
HT3030-4	30 X 30	5	EA	5
HT3232-4	32 X 32	5	EA	5
HT3345-4	33 X 45	5	EA	5
HT3636-4	36 X 36	5	EA	5
HT3648-4	36 X 48	5	EA	5
HT3842-4	38 X 42	5	EA	5
HT3852-4	38 X 52	5	EA	5
HT4040-4	40 X 40	5	EA	5
HT4242-4	42 X 42	5	EA	5
HT4558-4	45 X 58	5	EA	5

The Hurricane Pad™ MD

The new Hurricane Pad™ MD is the newest in concrete pad technology from DiversiTech. The Hurricane Pad MD is a solid concrete pad designed for the strict requirements of Miami Dade county. The Hurricane Pad MD meets the Florida Building Code Notice and can withstand winds up to 175 MPH. This pad is made from a minimum 7000PSI solid concrete.



HMD3030-4

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HMD1844-4	18 X 40 X 4	5	EA	5
HMD2436-4	24 X 36 X 4	5	EA	5
HMD3030-4	30 X 30 X 4	5	EA	5
HMD3636-4	36 X 36 X 4	5	EA	5
HMD3648-4	36 X 48 X 4	5	EA	5
HMD3842-4	38 X 42 X 4	5	EA	5
HMD4040-4	40 X 40 X 4	5	EA	5


The Hurricane Pad Attachment Bracket

Bracket secures condenser to The Hurricane Pad. Use #8 self drilling or self tapping screws to secure condenser to brackets. Be sure to place brackets according to local building code requirements. Made of 12 gauge ASTM A653 Grade 40 steel with G90 coating.



HC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HC-1	The Hurricane Pad Attachment Bracket, pack of 4 PK	PK	1
HC-1-100	The Hurricane Pad Attachment Bracket, pack of 100 PK	PK	1

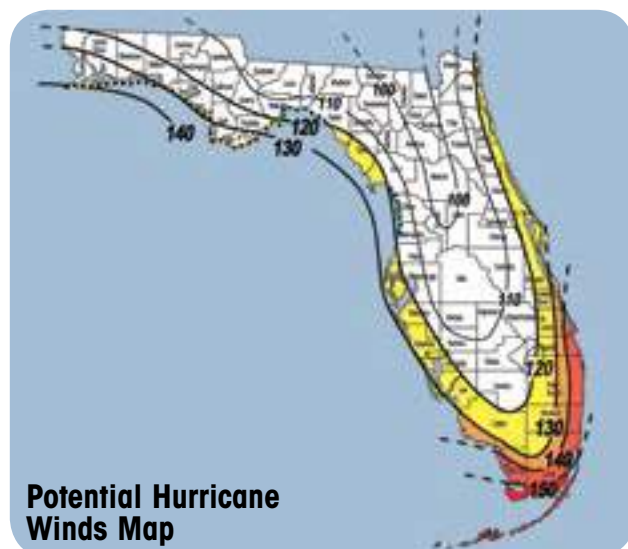

Potential Hurricane Winds Map

THE BLACK PAD® BLACK PLASTIC EQUIPMENT PADS

The Black Pad® is an innovative equipment pad using ground, recycled rubber in a co-injection process. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad® is suitable for use with pool pumps, filters, and heaters and complies with the 1997 Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.



ACP24242

The Black Pad® — 3"

Used where local codes supersede the International code and require a pad thicker than 2".



ACP24243

The Black Pad® — 2"


The 2" thick Black Pad® is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
ACP24242	24 X 24	10	24	240	EA	24
ACP24362	24 X 36	15	24	360	EA	24
ACP30302	30 X 30	13	24	312	EA	24
ACP32322	32 X 32	16	24	384	EA	24
ACP32442	32 X 44	23	24	552	EA	24
ACP36362	36 X 36	19	24	456	EA	24
ACP38422	38 X 42	25	24	600	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
ACP24243	24 X 24	12	16	192	EA	16
ACP30303	30 X 30	20	16	320	EA	16
ACP32323	32 X 32	25	16	400	EA	16
ACP36363	36 X 36	23	16	368	EA	16
ACP36483	36 X 48	37	16	592	EA	16

HEF-T-PAD™ PLASTIC EQUIPMENT PADS


Hef-T-Pad™ is an injection molded equipment pad created from high impact polypropylene with UV inhibitors making it easy to handle, yet durable and strong. It does not require any additional equipment for moving and handling. It is resistant to impact, ultra violet degradation and weathering and will not crack, flake, or warp. The Hef-T-Pad™ is virtually impervious to climatic variations. It is drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to be easily secured to the pad.



X3030211

Hef-T-Pad™ — 3"

Used where local codes supersede the International code and require a pad thicker than 2".



X3030311

Hef-T-Pad™ — 2"

The 2" thick Hef-T-Pad™ is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
X2424211	24 X 24 X 2	6	24	208	EA	24
X2430211	24 X 30 X 2	8	24	251	EA	24
X2436211	24 X 36 X 2	10	24	290	EA	24
X3030211	30 X 30 X 2	10	24	290	EA	24
X3232211	32 X 32 X 2	11	24	312	EA	24
X3244211	32 X 44 X 2	14	24	382	EA	24
X3636211	36 X 36 X 2	13	24	367	EA	24
X3830211	38 X 30 X 2	14	24	378	EA	24
X3836211	38 X 36 X 2	14	24	376	EA	24
X3842211	38 X 42 X 2	17	24	464	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
X2424311	24 X 24 X 3	9	16	200	EA	16
X2436311	24 X 36 X 3	12	16	242	EA	16
X3030311	30 X 30 X 3	13	16	264	EA	16
X3232311	32 X 32 X 3	16	16	300	EA	16
X3636311	36 X 36 X 3	17	16	319	EA	16
X3848311	38 X 48 X 3	24	16	400	EA	16
X5055301	50 X 55 X 3	42	16	688	EA	16

ENVIROPAD™ BLACK PLASTIC EQUIPMENT PADS

An injection molded equipment pad created from 100% recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EnviroPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.

**EP2424-2****EnviroPad™ — 3"**

Used where local codes supersede the International code and require a pad thicker than 2".

**EP2424-3****EnviroPad™ — 2"**


The 2" thick EnviroPad™ is the choice for plastic pads, unless a thicker pad (3") is required by the local building code.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EP2424-2	24 X 24 X 2	6	24	208	EA	24
EP2436-2	24 X 36 X 2	10	24	240	EA	24
EP3030-2	30 X 30 X 2	10	24	290	EA	24
EP3232-2	32 X 32 X 2	11	24	312	EA	24
EP3244-2	32 X 44 X 2	14	24	382	EA	24
EP3636-2	36 X 36 X 2	13	24	367	EA	24
EP3842-2	38 X 42 X 2	17	24	450	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
EP1838-3	18 X 38 X 3	10	16	166	EA	16
EP2424-3	24 X 24 X 3	9	16	200	EA	16
EP3030-3	30 X 30 X 3	13	16	264	EA	16
EP3232-3	32 X 32 X 3	16	16	300	EA	16
EP3244-3	32 X 44 X 3	14	16	273	EA	16
EP3636-3	36 X 36 X 3	17	16	319	EA	16
EP3648-3	36 X 48 X 3	23	16	368	EA	16
EP3842-3	38 X 42 X 3	20	16	323	EA	16
EP4040-3	40 X 40 X 3	28	16	496	EA	16

HEAT PUMP PAD™**Heat Pump Pad™**

Provides an effective base for heat pump equipment installed in snowy climates. Rather than a combination of a typical 2" (or 3") equipment pad and 6" heat pump risers, the Heat Pump Pad™ provides a full 8" of elevation in a simple square footprint. The star pattern of the integral risers allows for installation of equipment with different size footprints up to 36" x 36". Also included are eight anti vibration pads uniquely designed to fit into the guide slots on the top of the integral risers. The base is sloped outward to allow for easy drainage of condensate or defrost cycle condensate when the outdoor coil is operating in heat pump mode. Nestable for efficient shipping, transportation, and warehousing. Injection molded from concrete gray, recycled polypropylene material, the Heat Pump Pad™ is environmentally friendly and designed to last longer than the equipment it supports. US Patent Number 7,891,635, and other patent(s) pending.

**HP3636-8****Stackable!**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HP3232-8	32" x 32" x 8"	EA	16
HP3636-8	36" x 36" x 8"	EA	16

HEAT PUMP RISERS

One Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HPR-3	Riser – 3"	EA	48
HPR-6	Riser – 6"	EA	36
HPR-12	Riser – 12"	EA	16
HPR-3NM	Riser – 3" No Mastic	EA	48

Adjustable Equipment Risers

Adjustable equipment risers easily adjust up or down as needed to secure equipment at the correct height. The large center barrel twists up from starting height of 5" to a max of 8". A separate top cap allows for raising or lowering the riser even with equipment already on it. Convenient height markings provided for reference.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AER-8	Adjustable Equipment Riser - 8"	EA	4
AER-8BL	Adjustable Equipment Riser - 8" Black	EA	4

Two Piece Heat Pump Risers

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in two heights and an extension. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HPR-3-2P	Two Piece Riser – 3"	EA	32
HPR-6-2P	Two Piece Riser – 6"	EA	16
HPR-3-2PG	Two Piece Black Riser – 3"	EA	32
HPR-6-2PG	Two Piece Black Riser – 6"	EA	16
HPR-EXT	4" Extension	EA	28

MOUNTING BRACKET AND BLOCKS

Air Handler Base – Heavy Duty Adjustable

Made of 14 gauge galvanized steel for excellent corrosion resistance and longevity. 22" high x 22" deep. Width is adjustable from 16" – 26". Supports up to 200 lbs.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HAB-BG	Steel Air Handler Base	EA	1

Furnace Mounting Blocks

Each furnace mounting block can support 40% more weight than competitive products – over 500 pounds! Easy peel and stick installation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FB-1	Furnace Mounting Block	EA	72

A/C Riser Block


The A/C Riser Block gives you a fast and easy way to elevate an air handler or furnace 2.5 in. off the floor or drain pan. The unique stacking feature provides variable height adjustment from a single block height of 2.5 in. in increments of .75 in.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACR-1	A/C Riser Block	EA	100

Air Handler Block

Lightweight styrofoam block (concrete gray) provides A/C air handler support in attic installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-60	Air Handler Block 8" x 8" x 4"	EA	144
7-64	Air Handler Block 8" x 8" x 4", pack of 4	PK	4

Hef-T-Block™

Used as mounting bases when condensing units must be bolted down. Available in three lengths. End caps are also available for aesthetics. Furnished complete with mounting bolts. Maximum load capacity is 440 pounds per mounting block. Installation temperature range from 4F (20C) to 140F (60C). Hef T Blocks fit all mini split condensing units with a unique sliding rail feature.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-MB14W	14" Hef-T-Block™ (White), pack of 2	PK	6
230-MB17W	17" Hef-T-Block™ (White), pack of 2	PK	6
230-MB36W	36" Hef-T-Block™ (White), pack of 2	PK	2
230-MBCW	Hef-T-Block™ End Cap (White), pack of 4	PK	25

MOUNTING BRACKET AND BLOCKS *cont'd*

Air Conditioner Brackets

These heavy duty 1/8" thick steel AC brackets are perfect for hanging A/C condensers and heat pumps outside the home. Mount at any height to allow for easy maintenance under units. No need to wait for finished grade or landscaping prior to installation of AC unit. Pre punched holes for easy installation. Powder coated gray finish. Load rating 600 lbs. per pair.



ACB-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACB-30	AC Mounting Bracket – 30", pack of 2	PK	1
ACB-36	AC Mounting Bracket – 36", pack of 2	PK	1
ACB-42	AC Mounting Bracket – 42", pack of 2	PK	1
ACB-48	AC Mounting Bracket – 48", pack of 2	PK	1

Hef-T-Bracket™ (Type 2)

Used for supporting condensing units, Hef-T-Brackets (Type 2) feature a cross bar that is attached to a wall, and two L shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L shaped brackets, and fastened using the bolts and anti vibration washers provided.



230-B2L

CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B2M	Hef-T-Bracket™ (Type 2) – Medium	18"	165#	EA	1
230-B2L	Hef-T-Bracket™ (Type 2) – Large	21"	220#	EA	1

Hef-T-Bracket™ (Type 3)

Used for supporting condensing units, Hef-T-Brackets (Type 3), just like Hef-T-Brackets (Type 2), feature a cross bar that is attached to a wall, and two L shaped brackets that are hooked and bolted into place on the cross bar. The condensing unit is mounted onto the L shaped brackets, and fastened using the bolts and anti vibration washers provided. The Hef-T-Bracket™ (Type 3) features an innovative locking mechanism called Easy Fit™. Easy Fit™ enables the arms to be joined to the uprights in a matter of seconds. A spring lock automatically secures the joint, preventing the arms from being dislodged accidentally. All brackets are furnished complete with an integral bubble level to make correct installation of the crossbar easier.



230-B3L



CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B3M	Hef-T-Bracket™ (Type 3) – Medium	19"	100#	EA	1
230-B3L	Hef-T-Bracket™ (Type 3) – Large	21"	150#	EA	1

Heavy Duty Bracket (Type 1)

Heavy duty L-shaped brackets for supporting condensing units. Each 20" arm supports up to 350 lbs.



230-B1HD

CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B1HD	Heavy Duty Bracket	20"	350#	EA	1

Hef-T-Bracket™ (Type 2)
Extra Duty

Used for supporting condensing units, Type 2 Extra Duty brackets feature a sturdy cross bar that is attached to a wall and two L shaped brackets that slide onto the crossbar and then bolt into place. The condensing unit is mounted onto the L shaped brackets and fastened using the bolts and anti-vibration washers provided. Includes bubble level and adjustable back support.



230-B2XL

CATALOG NO.	DESCRIPTION	ARM LENGTH	LOAD RATING PER ARM	UOM	ORDER MULTIPLE
230-B2XL	Hef-T-Bracket™ (Type 2) – Large	21"	240#	EA	1

Base Pad

Used as a mounting base when condensing units must be bolted down. Maximum load capacity is 220 lbs. per pad. Sliding rail design for easy and fast installation. Includes mounting bolts. Available in 14" and 17" lengths. Ivory color.




230-BP14W

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-BP14W	14" Base Pad, pack of 2	PK	10
230-BP17W	17" Base Pad, pack of 2	PK	10

ANTI-VIBRATION PADS

E.V.A. Anti-Vibration Pad

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The EVA Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the EVA Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 psi.




MP-4E

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2E	2" x 2" x 7/8" E.V.A. Pad	EA	48
MP-3E	3" x 3" x 7/8" E.V.A. Pad	EA	36
MP-4E	4" x 4" x 7/8" E.V.A. Pad	EA	24
MP-6E	6" x 6" x 7/8" E.V.A. Pad	EA	24
MP-12E	12" x 12" x 7/8" E.V.A. Pad	EA	12
MP-18E	18" x 18" x 7/8" E.V.A. Pad	EA	6

Rubber Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 lbs. psi. The rubber pads are corrugated on both sides. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.




MP-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2	2" x 2" x 3/8" Rubber	EA	48
MP-3	3" x 3" x 3/8" Rubber	EA	36
MP-4	4" x 4" x 3/8" Rubber	EA	24
MP-6	6" x 6" x 3/8" Rubber	EA	24
MP-8	8" x 8" x 3/8" Rubber	EA	12
MP-12	12" x 12" x 3/8" Rubber	EA	12
MP-18	18" x 18" x 3/8" Rubber	EA	6

Rubber/Cork Anti-Vibration Pad

Highest quality elastomeric oil resistant padding. Designed to withstand 50 psi. The rubber pads are corrugated on both sides. The cork is laminated between two corrugated pads. Ideal for air conditioners, compressors, cooling towers, presses, machines, etc.



MP-4C

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MP-2C	2" x 2" x 7/8" Rubber/Cork	EA	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	EA	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	EA	24
MP-6C	6" x 6" x 7/8" Rubber/Cork	EA	24
MP-8C	8" x 8" x 7/8" Rubber/Cork	EA	12
MP-12C	12" x 12" x 7/8" Rubber/Cork	EA	12
MP-18C	18" x 18" x 7/8" Rubber/Cork	EA	6

Iso-Cube Economy Anti-Vibration Pad

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 psi with greater resiliency.



ISO-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ISO-2	2" x 2" x 3/4" Iso-Cube	EA	24
ISO-4	4" x 4" x 3/4" Iso-Cube	EA	12
ISO-18	18" x 18" x 3/4" Iso-Cube	EA	6

THEFT PREVENTION

Adjustable Condenser Guard

The heavy duty Adjustable Condenser Guard adjusts to fit over most outdoor units and bolts directly to the equipment pad. This helps prevent theft and keeps equipment in place. Made of heavy duty, powder coated steel. Adjustable height and width on each leg. Adjusts from 25-1/8" x 25-1/8" x 28" to 43-1/8" x 43-1/8" x 48". Designed to fit over a 30" x 30" to 48" x 48" pad.



ACG-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACG-1	Adjustable Condenser Guard	EA	1

AIR MOVEMENT

Dryer Duct, Vent Hose, Hose Clamps 32-33
Duct Strap, Ties, Clamps 33-34
Permanent Air Filters..... 35
Pure-Beam™ Ultraviolet Light 32
Tapes 36
Ventilation Products..... 31



PURE-BEAM™ Ultraviolet Light

The Pure-Beam™ ultraviolet light is designed for HVAC air disinfection and surface irradiation. Exposure to Pure-Beam™ significantly reduces air contamination caused by fungus, mold, and viruses and can cleanse surfaces overcome by mold and slime.


- The Pure-Beam™ ultraviolet light is an excellent way to maintain indoor air quality.
- This UV Light includes a ballast, transformer, and bracket for even more convenience.
- Overall dimensions are small which makes installation easy.
- The included transformer allows operation using 120, 208, and 240/220 VAC power.
- UV lights are unobtrusive and transparent in operation, requiring little maintenance.



VENTILATION PRODUCTS

Duct Fans

• Features electrical junction box for UL and code compliant electrical connection. An efficient way to increase air circulation, keep room temperatures consistent, and lower heating and cooling costs. Metal construction, powerful no-maintenance motors and a one-use thermal fuse mean these fans will be up to the task for years. Straightforward installation into any 120V system with detailed instructions, templates, and diagrams. Available in many sizes. A great way to give slow vents a boost. Conforms to UL STD 507, Certified to CSA STD C22.2 #113



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-AF6	Duct Fan 6" dia., 240 CFM, 37W	EA	4
625-AF8	Duct Fan 8" dia., 420 CFM, 37W	EA	4
625-AF10	Duct Fan 10" dia., 650 CFM, 35W	EA	4
625-AF12	Duct Fan 12" dia., 975 CFM, 65W	EA	2
625-AF14	Duct Fan 14" dia., 1350 CFM, 65W	EA	1

Roof Flashing

Easy to install. The no-caulk flashing slips over vent stack and automatically adjusts to pipe size and roof angle. 24 gauge galvanized steel.



Oatey

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-11830	Roof Flashing – 1/2" – 3/4" – 1"	EA	12
5-11840	Roof Flashing – 1-1/4" – 1-1/2"	EA	12
5-11853	Roof Flashing – 2"	EA	12
5-11866	Roof Flashing – 3"	EA	12
5-11879	Roof Flashing – 4"	EA	12

Roof Louver

Unique interior louver design, eliminating the need for a screen. The square hood has been designed for maximum air movement. Large nailing flange for easy installation. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-R50A	Roof Louver – Aluminum	EA	10

Flue Caps

PVC Flue Caps are an affordable way to protect today's high efficiency furnaces from dirt, moisture and other debris.

- Protection for high efficiency furnaces
- Universal flue cap fits 1.5", 2" and 3" PVC pipe
- Reduces draft inducer motor rust
- Helps to eliminate pressure switch service calls
- Resistant to UV radiation and oxidative degradation
- CSA approved for use in 90% AFUE heating applications



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EC-1	E cap Flue Cap	EA	12

Smokeys


Smoke emitter cartridges provide effective, low cost leak testing of heat exchangers, air ducts, tanks and boilers. Visual air balancing of HVAC systems. Cartridges produce clean, non toxic, oil free smoke through chemical reaction. Use also for fire drills as well as the placement and testing of smoke alarms/ detectors.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
14145	45 second burn time, 150 cu. ft., pack of 10	PK	1
14175	75 second burn time, 600 cu. ft., pack of 10	PK	1
14250	2-1/2 minute burn time, 1,100 cu. ft., pack of 5	PK	1
14340	4 minute burn time, 2,500 cu. ft., pack of 5	PK	1
14460	8 minute burn time, 18,000 cu. ft.	EA	1

Versa Cap® Flue and Hot Stack Caps

Non clogging positive draft design, recommended for flue or hot stack installation. Clamp fitting adjustable for all standard sizes. Aluminum model. U.L. Listed.



CATALOG NO.	PIPE O.D.	DOUBLE WALL	SINGLE WALL	J-M TRANS. SITE	HEIGHT/OVERALL DIAMETER	ORDER UOM MULTIPLE
6-3050	2-7/8"–5"	3 and 4	3 and 4	3 and 4	4-1/2" x 6-5/8"	EA 12
6-5070	4-7/8"–7"	5 and 6	5 and 6	5 and 6	4-3/4" x 9-1/2"	EA 12
6-7090	6-7/8"–9"	7 and 8	7 and 8	7 and 8	5-7/8" x 11-5/8"	EA 12
6-9011	8-7/8"–11"	9 and 10	9 and 10	9 and 10	6-1/2" x 12-3/4"	EA 6
6-1200	11-7/8"–14-1/2"	12	12 and 14	12	8-11/16" x 17-9/16"	EA 2

Egg Crate Louvers – Air Return Diffusers

White polystyrene 1/2 in. open cell grid louvers are beneficial for air return.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-300	Egg Crate Louvers – 2' x 2' x 1/2"	EA	20
650-200	Egg Crate Louvers – 2' x 4' x 3/8"	EA	15
650-100	Egg Crate Louvers – 2' x 4' x 1/2"	EA	10

PURE BEAM™ ULTRAVIOLET LIGHT**Pure-Beam™ Ultraviolet Light**


Pure Beam™ ultraviolet light is designed for HVAC air disinfection and surface irradiation. The 17 watt UV C lamp is a powerful tool for improved indoor air quality. Installs in the HVAC system or ductwork on either the return or supply air side of the furnace or air handler. DiversiTech's Pure Beam™ ultraviolet light provides a healthier environment in your home, thanks to the germicidal qualities of the UV light spectrum present in the Pure Beam™ light. Ultraviolet light deactivates the DNA of dust mites, bacteria, viruses and other pathogens and destroys their ability to multiply and cause disease. Placement of a Pure Beam™ light in an airstream or near a drain pan can help to decrease the air contamination of any home. Exposure to Pure Beam™ significantly reduces air contamination caused by fungus, mold, and viruses and can cleanse surfaces overcome by mold and slime. Overall size is 14 in. L x 2 in. W x 2 in. H for easy placement. Includes the UV lamp, a UL listed ceramic base, and mounting bracket.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
UV-1	Ultraviolet Light with 24 VAC elec. ballast	EA	1
UV-BULB	Replacement Bulb – 24V	EA	1

DRYER DUCT, VENT HOSE, HOSE CLAMPS**Aluminum Dryer Vent Hoods, Kits, and Fittings**


Aluminum vent hood with flange plate.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-001	4" Aluminum Hood	EA	12
650-002	3" Aluminum Hood	EA	12
650-003	4" Hood / 8' Tubing	EA	1
650-004	4" Hood / 5' Tubing	EA	1
650-038	4" Aluminum Wide Mouth	EA	10

Plastic Wide Mouth Dryer Vent Hood

Hood, aluminum pipe and collar.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-031	3" White Hood – Assembled	EA	12
650-012	4" White Hood – Assembled	EA	12
650-013	4" White Hood – Unassembled	EA	18
650-023	4" Brown Hood – Assembled	EA	12

Dryer Vent Hose

High quality flexible white vinyl tubing. Available in 3in. or 4in. diameters. One 50ft roll per box.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-005	Dryer Vent Hose – 3" x 50'	EA	1
650-006	Dryer Vent Hose – 4" x 50'	EA	1

Semi-Rigid Aluminum Duct

8ft. length compressed to 28in.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-011	4" x 8' Flexible Aluminum Duct	EA	9
650-021	3" x 8' Flexible Aluminum Duct	EA	14
650-074	6" x 8' Flexible Aluminum Duct	EA	3

DRYER DUCT, VENT HOSE, HOSE CLAMPS cont'd

Louvered Dryer Vent Hood

Louvered vent hoods are available with aluminum pipe and collar or hood only. Ideal for dryer and bathroom fan exhausts.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-014	4" Hood Only – White	EA	12
650-015	4" Hood Only w/Bird Guard – White	EA	12
650-016	4" Hood, Pipe and Collar – White (Assembled)	EA	12
650-017	4" Hood, Pipe and Collar – White (Unassembled)	EA	18
650-036	3" Hood, Pipe and Collar – White (Assembled)	EA	12

Dryer Hose Clamps

Available for 3 in. or 4in. dryer vent hose. Steel screw design or convenient spring action design.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-008	Steel Screw Clamp for 4" Hose	EA	50
650-010	Spring Clamp for 4" Hose	EA	500

Metallic Duct – 5 Ply

Pure aluminum 5 ply multi layered flexible metallic duct. U.L. 181 Listed. Will contain a fire up to 265°F.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FUL0425	4" x 25' 5 Ply Metallic Duct	EA	4
FUL0625	6" x 25' 5 Ply Metallic Duct	EA	4

Periscope Connection Kit

For tight space duct venting. Contains one male snap lock fitting and one draw band with clamp. Adjustable 17in. to 28in..



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
650-020	4" Periscope Kit	EA	9

Metallic Duct – 2 Ply

2 ply metallic duct — aluminum outside, polyester inside. Ideal for bath fan ducting and all purpose venting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FM0450	4" x 50' 2 Ply Metallic Duct	EA	1

DUCT STRAP, TIES, CLAMPS

Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32 in. plus allows operator to adjust strap to any desired tension.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-P24	24" Long – Fits up to 6" Duct – 175 lb. Tensile	EA	50
7-P36	36" Long – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P36B	36" Long – Black – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P48	48" Long – Fits up to 14" Duct – 175 lb. Tensile	EA	50
7-P48B	48" Long – Black – Fits up to 14" Duct – 175 lb. Tensile	EA	25
7-L300	Tensioning Tool for 120-175 lb. Ties	EA	1

Strapping Hanger Iron

Galvanized 3/4 in. vent strapping, hanger iron, plumber's tape, pipe hanger tape and many other uses. 1/4 in. centers for bolts or nails.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
710-A1710	Hanger Iron (Galv.) – 10' Rolls – 28 Gauge	EA	50
710-A1650	Hanger Iron (Galv.) – 50' Rolls – 28 Gauge	EA	10
710-A16100	Hanger Iron (Galv.) – 100' Rolls – 28 Gauge	EA	6

DUCT STRAP, TIES, CLAMPS *cont'd***Hanging Wire**

The 18 gauge galvanized can be used to hang HVAC duct work.

**710-182G**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
710-182G	2# Roll – 330' – 18 Gauge Galvanized	EA	8
710-185G	5# Roll – 830' – 18 Gauge Galvanized	EA	8

Duct Strap – Woven Polypropylene

Webbed duct strap possessing high tensile and abrasion resistance. This can be used for flex duct as it is easy to cut and staple to joists. The product is chemical resistant and listed to spec 2040.

**710-100**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
710-100	Duct Strap – 1-3/4" x 100 Yards – Black	EA	24
710-101	Duct Strap – 1-3/4" x 100 Yards – Silver	EA	24
710-102	Duct Strap – 3" x 100 Yards – Black	EA	8
710-103	Duct Strap – 3" x 100 Yards – Silver	EA	8

Duct Strap – Metallic – Roll

Galvanized duct strap in a convenient cardboard dispenser is not only easy to drill or nail, but also solid strapping. Plenum rated.

**710-001**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
710-001	Metallic Duct Strap – 26 Gauge – 1" x 100'	EA	1
710-002	Metallic Duct Strap – 30 Gauge – 1" x 100'	EA	1
710-003	Metallic Duct Strap – 30 Gauge – 1-1/2" x 100'	EA	1
710-004	Metallic Duct Strap – 26 Gauge – 1-1/2" x 100'	EA	1
710-005	Metallic Duct Strap – 22 Gauge – 1" x 100'	EA	1

Plastic Hanger Strap

Flexible, non-conductive. 3/4 in. wide x .050 in. thick. Load tested to 120 lbs.

**710-P100**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
710-P100	3/4" x 100' Roll	EA	20

PERMANENT AIR FILTERS

Every filter makes trade-offs between letting too much air through (good for the unit) and trapping too much "stuff" (good for the homeowner). Where is the right balance? What is best for the homeowner and their unit? DiversiTech offers two permanent air filters. Choose the Red Label Filter for a good balance between ample air flow and ability to trap dust. Choose the Blue Label Filter if you feel greater air flow is needed, perhaps for older units.

Blue Label Permanent Air Filters

The Blue Label Permanent Air Filters offer a 0.08 Initial Resistance. Blue Label Filters offer Peak Dust Arrestance of 73% with the average being 67%. The Dust Holding Capacity is 99 gm. These filters are perfect for units that need a greater air flow.



CATALOG NO.	1" NOMINAL SIZE	DESCRIPTION	UOM	ORDER MULTIPLE
AFB1212-1	12" x 12" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1220-1	12" x 20" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1224-1	12" x 24" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1420-1	14" x 20" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1424-1	14" x 24" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1425-1	14" x 25" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1520-1	15" x 20" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1624-1	16" x 24" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1625-1	16" x 25" x 1"	Blue Label Permanent Air Filter	EA	1
AFB1818-1	18" x 18" x 1"	Blue Label Permanent Air Filter	EA	1
AFB2024-1	20" x 24" x 1"	Blue Label Permanent Air Filter	EA	1
AFB2025-1	20" x 25" x 1"	Blue Label Permanent Air Filter	EA	1
AFB2030-1	20" x 30" x 1"	Blue Label Permanent Air Filter	EA	1
AFB2424-1	24" x 24" x 1"	Blue Label Permanent Air Filter	EA	1
AFB2525-1	25" x 25" x 1"	Blue Label Permanent Air Filter	EA	1
AFB-CUSTOM-1	Custom 1"	Blue Label Permanent Air Filter	EA	1
AFB-CUSTOM-2	Custom 2"	Blue Label Permanent Air Filter	EA	1

2" Blue Label Permanent Air Filters are available in all above sizes. Specify 2" when ordering.

Red Label Permanent Air Filters

The Red Label Permanent Air Filters offer a 0.12 Initial Resistance. Red Label Filters offer Peak Dust Arrestance is 82% with the average being 76%. The Dust Holding Capacity is 147 gm. These filters have a good balance between ample air flow and the ability to trap dust.



CATALOG NO.	1" NOMINAL SIZE	DESCRIPTION	UOM	ORDER MULTIPLE
AFR1220-1	12" x 20" x 1"	Red Label Permanent Air Filter	EA	1
AFR1224-1	12" x 24" x 1"	Red Label Permanent Air Filter	EA	1
AFR1420-1	14" x 20" x 1"	Red Label Permanent Air Filter	EA	1
AFR1424-1	14" x 24" x 1"	Red Label Permanent Air Filter	EA	1
AFR1425-1	14" x 25" x 1"	Red Label Permanent Air Filter	EA	1
AFR1430-1	14" x 30" x 1"	Red Label Permanent Air Filter	EA	1
AFR1520-1	15" x 20" x 1"	Red Label Permanent Air Filter	EA	1
AFR1620-1	16" x 20" x 1"	Red Label Permanent Air Filter	EA	1
AFR1625-1	16" x 25" x 1"	Red Label Permanent Air Filter	EA	1
AFR1824-1	18" x 24" x 1"	Red Label Permanent Air Filter	EA	1
AFR1825-1	18" x 25" x 1"	Red Label Permanent Air Filter	EA	1
AFR2020-1	20" x 20" x 1"	Red Label Permanent Air Filter	EA	1
AFR2024-1	20" x 24" x 1"	Red Label Permanent Air Filter	EA	1
AFR2025-1	20" x 25" x 1"	Red Label Permanent Air Filter	EA	1
AFR2030-1	20" x 30" x 1"	Red Label Permanent Air Filter	EA	1
AFR2525-1	25" x 25" x 1"	Red Label Permanent Air Filter	EA	1
AFR-CUSTOM-1	Custom 1"	Red Label Permanent Air Filter	EA	1
AFR-CUSTOM-2	Custom 2"	Red Label Permanent Air Filter	EA	1

2" Red Label Permanent Air Filters are available in all above sizes. Specify 2" when ordering.

LIMITED LIFETIME WARRANTY

DiversiTech hereby guarantees to the original purchaser that this DiversiTech permanent air filter will remain free of defects in materials and workmanship, when used in accordance with the recommended guidelines, for the life of the unit on which it is installed. Should this air filter be found to be defective, the remedies of the original purchaser are expressly limited to having DiversiTech replace the filter free of charge. To obtain the replacement filter, the original purchaser must return the defective filter to DiversiTech, 2175 East Park Drive, Conyers, GA 30013, with postage charges prepaid.

The warranty does not include the cost of installing the DiversiTech permanent air filter or any other costs, all of which shall be borne by the original purchaser. This warranty does not cover damage due to abuse, improper installation, installation in other than standard residential air conditioning and/or heating units, cleaning by high pressure hose or sprays or by use of highly caustic or corrosive cleaning agents.

DiversiTech makes no other warranty whatsoever and all other warranties of merchantability and fitness whether expressed or implied are limited to the life of the original air conditioning or heating unit on which the DiversiTech permanent air filter is installed.

TAPES

Stick-E-Tape

Self adhesive aluminum tape with temperature range of 40 degree F to 200 degree F. Easily painted. Excellent vapor barrier; effective UV and water shield over urethane foam. Preferred duct and pipe wrap.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
50302	Stick-E-Tape – AFT-701-2 – 2" x 50' Roll	EA	24

Flex Duct Tape

Specially designed to meet new UL181B FX code for flex duct. Higher adhesion and tack than traditional cloth duct tapes. Conformable, hand tearable foil; 3 mil thickness. 2 in. x 120 yds. Code identification printed on the tape. Acrylic adhesive for superior performance in extreme environments. (35°F to 260°F)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-FD2S	Flex Duct Tape – Silver – 2"	EA	24
640-FD2B	Flex Duct Tape – Black – 2"	EA	24
640-FD3S	Flex Duct Tape – Silver – 3"	EA	16
640-FD3B	Flex Duct Tape – Black – 3"	EA	16

UL Listed Foil Tape

Unique acrylic adhesive for airtight bonds on joints and seams of fiberglass duct systems. Flexible, easy to use. Meets or exceeds performance standard AFLS 100 73 and UL 181 A P.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-UL25	UL 181 Listed Foil Tape – 2-1/2" – 60 Yards	EA	16
640-UL3	UL 181 Listed Foil Tape – 3" – 60 Yards	EA	16

Aluminum Foil Tape

Prevents heating and cooling losses. Blocks odors and moisture. Easy to handle. Use for HVAC and refrigeration systems. 35 degree F to plus 260 degree F working temperatures. 3-5 year shelf life. Made in USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-AF2	2" Aluminum Foil Tape – 50 yds.	EA	24
640-AF25	2-1/2" Aluminum Foil Tape – 50 yds.	EA	20
640-AF3	3" Aluminum Foil Tape – 50 yds.	EA	16

Foil Scrim Kraft Tape

Non tearable, diamond patterned backing with an aggressive rubber based adhesive system for consistently dependable performance. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-FSK2	Foil Scrim Kraft Tape – 2" – 50 Yards	EA	24
640-FSK3	Foil Scrim Kraft Tape – 3" – 50 Yards	EA	16

Cloth Duct Tapes

High tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PC-622-S	2" x 60 Yards – Premium Grade Duct Tape – Silver	EA	24
PC-622-B	2" x 60 Yards – Premium Grade Duct Tape – Black	EA	24
PC-609-S	2" x 60 Yards – Industrial Grade Duct Tape – Silver	EA	24
PC-609-B	2" x 60 Yards – Industrial Grade Duct Tape – Black	EA	24
PC-600-S	2" x 60 Yards – Contractor Grade Duct Tape – Silver	EA	24
PC-600-B	2" x 60 Yards – Contractor Grade Duct Tape – Black	EA	24
PC-857	2" x 60 Yards – Metallized UL181B-FX Flex Duct Tape	EA	24

HEATING PRODUCTS

Black Steel Welded Nipples.....	44
Carbon Monoxide & Smoke Alarms.....	42
Diversitech Gas Connectors.....	42
Dormont Gas Valves and Connectors.....	43
Heating Cables.....	41
Malleable Black Iron and Steel Pipe Fittings.....	44-45
TrueStart Hot Surface Igniters.....	40
TrueStart Ignition Accessories.....	40-41
Vent Termination Kits.....	41



TrueStart® Hot Surface Igniters



*TrueStart® hot surface igniters have been
100% tested and approved.*

*TrueStart® hot surface igniters are completely reliable
right out of the package and are certified by CSA
for use in electrical equipment.*





TrueStart® universal hot surface igniters by DiversiTech are high quality replacements that fit hundreds of OEM components. TrueStart® universal igniters are durable and are designed to provide years of reliable service.

BUILT TO LAST

TrueStart® universal igniters are available in silicon nitride and silicon carbide models. Silicon nitride is a very durable ceramic that is high fracture and temperature resistant and has a long life expectancy. Silicon nitride is a longer lasting material that is also more shock resistant. Silicon carbide is a naturally high temperature resistant metal that has been the standard used in heating equipment for years.

JUST ONE REPLACES HUNDREDS

TrueStart® universal hot surface igniters feature a universal bracket kit that can be used to fit most all OEM furnaces. And TrueStart® hot surface igniters feature a unique universal electrical plug kit. This plug kit includes the most common crimp terminals and connector housings to fit the majority of OEM furnaces.

- ✓ *Durable ceramic material*
- ✓ *High thermal shock and chemical resistance*
- ✓ *Fracture resistant*
- ✓ *Long life*

LONG WARRANTY

Every TrueStart® universal igniter includes a generous warranty period to ensure your satisfaction. The warranty on silicon nitride models is 3 full years and the warranty for silicon carbide igniters is 18 months.

100% TESTED

TrueStart® universal hot surface igniters have been 100% tested and approved. TrueStart® hot surface igniters are completely reliable right out of the package and are certified by CSA for use in electrical equipment.

**Replaces
Hundreds
of OEM
Igniters**

Each TrueStart® universal igniter also includes:



A universal bracket kit for a fast, easy installation.



A universal electrical plug connection kit to simplify installation.



Color coded packaging.



Made in U.S.A.



TRUESTART® HOT SURFACE IGNITERS

Wolverine® Universal Hot Surface Igniter

Wolverine® hot surface igniters feature protective, dynamic, and informative packaging. Wolverine® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IGN-2	Wolverine Hot Surface Igniter by TrueStart, Universal, Silicon Nitride	EA	6
IGN-2-6P	Wolverine Hot Surface Igniter by TrueStart, Universal, Silicon Nitride – Contractor Pack, pack of 6	PK	1

TrueStart™ Hot Surface Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart® hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as direct replacement for OEM (silicon carbide) or as a universal igniter (silicone carbide or silicon nitride). Universal hot surface igniters allow a contractor to reduce truck stock and replace hundreds of OEM igniters with just one SKU



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IGN-1F	TrueStart™ Hot Surface Igniter, Universal, Flat, Silicon Nitride	EA	6
IGN-1R	TrueStart™ Hot Surface Igniter, Universal, Round, Silicon Nitride	EA	6

Direct Replacement Igniters


TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart™ hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as direct replacement for OEM silicon carbide igniters.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IGN-401	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Nitride	EA	6
IGN-402	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Nitride	EA	6
IGN-403	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Nitride	EA	6
IGN-409	TrueStart™ Hot Surface Igniter, Direct Replacement, Silicon Nitride	EA	6

Universal Silicon Carbide Igniters

TrueStart® hot surface igniters feature protective, dynamic, and informative packaging. TrueStart™ hot surface igniters are 100% tested and completely reliable. They are compatible with all OEM furnaces. TrueStart® hot surface igniters are available as a universal silicon carbide igniter.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IGN-001	TrueStart™ Hot Surface Igniter, Universal, Silicon Carbide	EA	6

TRUESTART® IGNITION ACCESSORIES

TrueStart® Pilot Burners

TrueStart® pilot burners are a direct replacement for Carrier/BDP pilot burners. Available in 2 wire and 3 wire versions. The 3 wire is also field convertible to a 2 wire. TrueStart® pilot burners are not manufactured by Carrier Corporation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FC-73	2 Wire Pilot Burner – Replacement for the Carrier® 732 2 wire pilot burner commonly known as Carrier®/BDP part number LH33JZ053	EA	1
FC-74	3 Wire Pilot Burner – Replacement for the Carrier® 740A 3 wire pilot burner commonly known as Carrier®/BDP part number LH680005	EA	1

TrueStart® Blower on Relays

TrueStart® blower on relays are direct replacements for Carrier/BDP blower on relays. TrueStart® blower on relays are not manufactured by Carrier Corporation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FC-82	Blower on Relay – Replacement for the Carrier®/BDP 821 Blower on Relay commonly known as Carrier® part number HN680001	EA	1

TRUESTART® IGNITION ACCESSORIES *cont'd*

TrueStart® Flame Sensors

TrueStart® flame sensors are a direct replacement for Carrier/BDP flame sensors, cross reference part numbers are detailed in the item descriptions. TrueStart® flame sensors are not manufactured by Carrier Corporation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
900-3	TrueStart™ FLAME SENSOR replaces Carrier® LH33WZ516	EA	1
900-4	TrueStart™ FLAME SENSOR replaces Carrier® LH33WZ517	EA	1
900-5	TrueStart™ FLAME SENSOR replaces Carrier® LH33WZ518	EA	1
900-6	TrueStart™ FLAME SENSOR replaces Carrier® LH33WZ520	EA	1

TrueStart® Spark Electrode

Replacement pilots and accessories for selected Carrier/BDP units. Full 2 year warranty. Made in America.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FC-87	Spark Electrode – Replacement for the Carrier®/BDP 871 Spark Electrode commonly known as Carrier®/BDP part number LH680512	EA	1

VENT TERMINATION KITS

Concentric Vents

Concentric vents make it easier to have a two pipe installation for high efficiency furnaces. These vents simplify installation and only require one hole through the wall or roof where the pipes terminate. Without using these vents, the installation would require cutting two holes thorough the home (2" or 3" depending on the furnace), one for each pipe. These vents save time and money by reducing the amount of work required. Available in 2" and 3" intake vent sizes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CVENT-2	2" Concentric Vent	EA	4
CVENT-3	3" Concentric Vent	EA	4
CVENT-2 CA	2" Concentric Vent for Canada	EA	4
CVENT-3 CA	3" Concentric Vent for Canada	EA	4

Horizontal Vent Termination Kits

Horizontal vent kits for use in venting high efficiency fossil fuel appliances. The low profile kit hides the vent from view.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HVENT-2	Horizontal Termination Kit - 2 inch	EA	6
HVENT-3	Horizontal Termination Kit - 3 inch	EA	6
HVENT-2 CA	Horizontal Termination Kit - 2 inch for Canada	EA	6
HVENT-3 CA	Horizontal Termination Kit - 3 inch for Canada	EA	6

HEATING CABLES

120V Heating Cables

Self-regulating Chromalox® heating cables by DiversiTech give the installer the ultimate in flexibility. Conventional "constant wattage" cables cannot be used on plastic drain pipe - the most common material used for condensate drain pipes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HC-01	Self Regulating Heating Cable - 3.28ft - 120V	EA	1
HC-02	Self Regulating Heating Cable - 6.56ft - 120V	EA	1
HC-03	Self Regulating Heating Cable - 9.84ft - 120V	EA	1
HC-04	Self Regulating Heating Cable - 13.12ft - 120V	EA	1
HC-05	Self Regulating Heating Cable - 16.41ft - 120V	EA	1
HC-06	Self Regulating Heating Cable - 19.69ft - 120V	EA	1
HC-07	Self Regulating Heating Cable - 22.87ft - 120V	EA	1
HC-09	Self Regulating Heating Cable - 29.53ft - 120V	EA	1

240V Heating Cables

Self-regulating Chromalox® heating cables by DiversiTech give the installer the ultimate in flexibility. Conventional "constant wattage" cables cannot be used on plastic drain pipe - the most common material used for condensate drain pipes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HC-02-2	Self Regulating Heating Cable - 6.56ft - 240V	EA	1
HC-04-2	Self Regulating Heating Cable - 13.12ft - 240V	EA	1
HC-06-2	Self Regulating Heating Cable - 19.69ft - 240V	EA	1
HC-08-2	Self Regulating Heating Cable - 26.25ft - 240V	EA	1
HC-10-2	Self Regulating Heating Cable - 32.81ft - 240V	EA	1

CARBON MONOXIDE & SMOKE ALARMS

Carbon Monoxide Alarms

Universal Security carbon monoxide alarms feature fast, easy installation, opto chemical sensor technology, easy access to the test/reset button, a loud 85 dB horn, and many more features. UL Listed, CSA approved.

CD-9000-B



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CD-9000-B	CO Detector, battery operated	EA	6

Combination Carbon Monoxide and Smoke Alarms

MICN109



- 3-in-1 alarm provides triple the protection with a single installation to protect against fires, carbon monoxide and natural gas
- 120-volt AC/DC hardwired alarm with backup battery is suitable for houses, apartments and mobile homes
- Mount the bracket to any standard wiring junction box and use the large mounting base to cover imperfections in drywall
- Features a quick activation pull-tab and a front-loading battery drawer for replacement without removing the alarm from the bracket
- Comes with a 7 year limited warranty

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CD-9775-C	CO/Smoke Detector, battery operated	EA	6
MICN109	Smoke, Carbon Monoxide and Natural Gas Alarm	EA	6

DIVERSITECH GAS CONNECTORS

DiversiTech Gas Connectors 1/2" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D20-3132-18	Gas Connector – 18" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-24	Gas Connector – 24" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-36	Gas Connector – 36" long, 1/2" OD x 3/8" ID, M x F	EA	12
D20-3132-48	Gas Connector – 48" long, 1/2" OD x 3/8" ID, M x F	EA	12

DiversiTech Gas Connectors 5/8" OD

Combining flexibility, durability, and functionality, DiversiTech stainless steel gas connectors are CSA design certified and 100% leak tested for quality and security. DiversiTech gas connectors are durable and reliable to give you everything you need. Available in a variety of sizes and lengths.



D30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D30-3131-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3131-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x M	EA	12
D30-3132-18	Gas Connector – 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-24	Gas Connector – 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-36	Gas Connector – 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
D30-3132-48	Gas Connector – 48" long, 5/8" OD x 1/2" ID, M x F	EA	12

Epoxy Coated Gas Connectors

Yellow coated gas connectors include an epoxy coating for added durability and extra protection from corrosion, chemical stains from common household products and plumbing repairs.



DC30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DC30-3132-18	Gas Connector coated – 18" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-24	Gas Connector coated – 24" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-36	Gas Connector coated – 36" long, 5/8" OD x 1/2" ID, M x F	EA	12
DC30-3132-48	Gas Connector coated – 48" long, 5/8" OD x 1/2" ID, M x F	EA	12

DORMONT GAS CONNECTORS AND VALVES

Dormont 20 Series

1/2" O.D. x 3/8" I.D. 1/2" MIP x 1/2" FIP Connectors



20-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
20-3132-18	Gas Connector – 18" Long	EA	12
20-3132-24	Gas Connector – 24" Long	EA	12
20-3132-36	Gas Connector – 36" Long	EA	12
20-3132-48	Gas Connector – 48" Long	EA	12

Dormont 20 Series with Valve

Corrugated stainless steel connectors with special Supr Safe design to increase flexibility. Maximum service and safety and is approved for both indoor and outdoor use. This is perfect for range and furnace connections. This Series is AA and CGA approved. This connector comes in 20 3135 18 1/2" O.D. x 3/8" I.D. x 1/2" FIP Ball Valve.



20-3135-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
20-3135-18	Gas Connector – 18" Long	EA	12
20-3135-24	Gas Connector – 24" Long	EA	12
20-3135-36	Gas Connector – 36" Long	EA	12
20-3135-48	Gas Connector – 48" Long	EA	12

Dormont 30 Series

Corrugated, stainless steel connectors with special Supr Safe® design to increase flexibility. Maximum service and safety, approved for indoor or outdoor use. Perfect for range and furnace connection. AGA and CGA approved. 3131 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" MIP Connectors. 3132 Series: 5/8" O.D. x 1/2" I.D. 1/2" MIP x 1/2" FIP Connectors.



30-3132-18

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
30-3131-24	Gas Connector – 24" Long	EA	12
30-3131-36	Gas Connector – 36" Long	EA	12
30-3131-48	Gas Connector – 48" Long	EA	12
30-3132-12	Gas Connector – 12" Long	EA	12
30-3132-18	Gas Connector – 18" Long	EA	12
30-3132-24	Gas Connector – 24" Long	EA	12
30-3132-30	Gas Connector – 30" Long	EA	12
30-3132-36	Gas Connector – 36" Long	EA	12
30-3132-48	Gas Connector – 48" Long	EA	12
30-3132-60	Gas Connector – 60" Long	EA	12
30-3132-72	Gas Connector – 72" Long	EA	12

Gas Ball Valve

Gas Ball Valves meet the stringent ISO 9000 quality standard. AGA and CGA certified.



91-3042

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
91-3042	5/8" O.D. Flare x 3/4" FIP for "30 Series" Gas Conn.	EA	10
91-2032	1/2" O.D. Flare x 1/2" FIP for "20 Series" Gas Conn.	EA	10
92-3232	1/2" FIP x 1/2" FIP	EA	10
92-4242	3/4" FIP x 3/4" FIP	EA	10

BLACK STEEL WELDED NIPPLES

Black Steel Welded Nipples

Welded Steel that withstands 700 PSI test pressure is perfect for everyday use. The specs for this product are ASTM A 120 (Nom B 10) and the thickness is Sch. 40.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPN-1	1/2" x CL Black Welded Nipple	EA	25
BPN-2	1/2" x 1-1/2" Black Welded Nipple	EA	25
BPN-3	1/2" x 2" Black Welded Nipple	EA	25
BPN-4	1/2" x 2-1/2" Black Welded Nipple	EA	25
BPN-5	1/2" x 3" Black Welded Nipple	EA	25
BPN-6	1/2" x 3-1/2" Black Welded Nipple	EA	25
BPN-7	1/2" x 4" Black Welded Nipple	EA	25
BPN-8	1/2" x 4-1/2" Black Welded Nipple	EA	25
BPN-9	1/2" x 5" Black Welded Nipple	EA	25
BPN-10	1/2" x 5-1/2" Black Welded Nipple	EA	25
BPN-11	1/2" x 6" Black Welded Nipple	EA	25
BPN-12	1/2" x 7" Black Welded Nipple	EA	25
BPN-13	1/2" x 8" Black Welded Nipple	EA	25
BPN-14	1/2" x 9" Black Welded Nipple	EA	25
BPN-15	1/2" x 10" Black Welded Nipple	EA	25
BPN-16	1/2" x 11" Black Welded Nipple	EA	25
BPN-17	1/2" x 12" Black Welded Nipple	EA	25
BPN-18	3/4" x CL Black Welded Nipple	EA	25
BPN-19	3/4" x 1-1/2" Black Welded Nipple	EA	25
BPN-20	3/4" x 2" Black Welded Nipple	EA	25
BPN-21	3/4" x 2-1/2" Black Welded Nipple	EA	25
BPN-22	3/4" x 3" Black Welded Nipple	EA	25
BPN-23	3/4" x 3-1/2" Black Welded Nipple	EA	25
BPN-24	3/4" x 4" Black Welded Nipple	EA	25
BPN-25	3/4" x 4-1/2" Black Welded Nipple	EA	25

Black Steel Welded Nipples (cont'd)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPN-26	3/4" x 5" Black Welded Nipple	EA	25
BPN-27	3/4" x 5-1/2" Black Welded Nipple	EA	25
BPN-28	3/4" x 6" Black Welded Nipple	EA	25
BPN-29	3/4" x 7" Black Welded Nipple	EA	25
BPN-30	3/4" x 8" Black Welded Nipple	EA	25
BPN-31	3/4" x 9" Black Welded Nipple	EA	25
BPN-32	3/4" x 10" Black Welded Nipple	EA	25
BPN-33	3/4" x 11" Black Welded Nipple	EA	25
BPN-34	3/4" x 12" Black Welded Nipple	EA	25
BPN-35	1" x CL Black Welded Nipple	EA	25
BPN-37	1" x 2" Black Welded Nipple	EA	25
BPN-38	1" x 2-1/2" Black Welded Nipple	EA	25
BPN-39	1" x 3" Black Welded Nipple	EA	25
BPN-40	1" x 3-1/2" Black Welded Nipple	EA	25
BPN-41	1" x 4" Black Welded Nipple	EA	25
BPN-42	1" x 4-1/2" Black Welded Nipple	EA	25
BPN-43	1" x 5" Black Welded Nipple	EA	25
BPN-44	1" x 5-1/2" Black Welded Nipple	EA	25
BPN-45	1" x 6" Black Welded Nipple	EA	25
BPN-46	1" x 7" Black Welded Nipple	EA	25
BPN-47	1" x 8" Black Welded Nipple	EA	25
BPN-48	1" x 9" Black Welded Nipple	EA	25
BPN-49	1" x 10" Black Welded Nipple	EA	25
BPN-50	1" x 11" Black Welded Nipple	EA	25
BPN-51	1" x 12" Black Welded Nipple	EA	25
BPN-52	1/2" x 18" Black Welded Nipple	EA	5
BPN-53	1/2" x 24" Black Welded Nipple	EA	5
BPN-54	1/2" x 36" Black Welded Nipple	EA	5
BPN-A12	1/2" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	1
BPN-A34	3/4" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	1
BPN-A1	1" Assortment Pack, 6 each of CL thru 6", pack of 66	PK	1

MALLEABLE BLACK IRON PIPE FITTINGS

90 Degree El

- Material: ASTM A 197 Cupola Malleable Iron, 150 lb.
- Dimensions:
ANSI B 16.3 - Malleable Iron Threaded Fittings
ANSI B 16.14 - Ferrous Pipe Plugs, Bushings etc.
ANSI B 16.39 - Malleable Iron Threaded Pipe Unions
- Threads: ANSI B 2.1 or BS 21
- Tensile Strength: 28.4 kg/mm.min



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-01	1/2" 90 Degree Elbow	EA	50
BPF-02	3/4" 90 Degree Elbow	EA	35
BPF-03	1" 90 Degree Elbow	EA	20

45 Degree El

The 45 Degree El fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-04	1/2" 45 Degree Elbow	EA	50
BPF-05	3/4" 45 Degree Elbow	EA	40
BPF-06	1" 45 Degree Elbow	EA	20

Coupling

The Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-07	1/2" Coupling	EA	60
BPF-08	3/4" Coupling	EA	50
BPF-09	1" Coupling	EA	25

Reducing Coupling

The Reducing Coupling fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-10	3/4" x 1/2" Reducing Coupling	EA	60
BPF-11	1" x 1/2" Reducing Coupling	EA	30
BPF-12	1" x 3/4" Reducing Coupling	EA	30

MALLEABLE BLACK IRON PIPE FITTINGS *cont'd*

90 Degree Street Ell

The 90 Degree Street Ell fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-13	1/2" 90 Degree Street Elbow	EA	60
BPF-14	3/4" 90 Degree Street Elbow	EA	35
BPF-15	1" 90 Degree Street Elbow	EA	30

Reducing Tee

The Reducing Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-19	1/2" x 1/2" x 3/4" Reducing Tee	EA	45
BPF-20	3/4" x 1/2" x 1/2" Reducing Tee	EA	45
BPF-21	3/4" x 1/2" x 3/4" Reducing Tee	EA	45
BPF-34	1" x 1" x 1/2" Reducing Tee	EA	50

Cap

The Cap fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-25	1/2" Cap	EA	75
BPF-26	3/4" Cap	EA	40
BPF-27	1" Cap	EA	35

Union

The Union fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.39. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-31	1/2" Union	EA	25
BPF-32	3/4" Union	EA	20
BPF-33	1" Union	EA	15

Tee

The Tee fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.3. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-16	1/2" Tee	EA	40
BPF-17	3/4" Tee	EA	35
BPF-18	1" Tee	EA	20

Bushing

The Bushing fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-22	3/4" x 1/2" Hex Bushing	EA	50
BPF-23	1" x 1/2" Hex Bushing	EA	50

Plug

The Plug fitting is made of ASTM A 197 Cupola Malleable Iron, 150 LB. The dimensions for this fitting are ANSI B 16.14. The threads are ANSI V 2.1 or BS 21 and the tensile strength is 28.4 kg/mm.min for this fitting.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BPF-28	1/2" Plug	EA	25
BPF-29	3/4" Plug	EA	15

In a class by itself.



DIVERSiTECH®



The **ClearVue™** condensate pump isn't like all the other pumps. It features Floatless Sensor™ technology for super reliable operation without a mechanical float — No Float, No Problems. And ClearVue even has a brain. Built-in Variable Speed and Lift adjusts pump speed and lift as needed so ClearVue can adapt to any conditions. ClearVue even cleans itself to ensure worry-free operation. Learn more about how ClearVue stands out from the crowd at www.diversitech.com

CONDENSATE MANAGEMENT

ClearVue™ Tubes & Traps.....	72
Condensate Drain Line Cleaning	72-73
Condensate Drain Line Switches	71
Condensate Drain Pans, Fittings, Adapters.....	73-75
Condensate Pumps.....	70
Drain Line, Tubing	75
Tapes	76



ClearVue™ Pump

About ClearVue™

The new ClearVue™ condensate pump from DiversiTech is unlike any other pump available. ClearVue™ features Variable Speed and Lift which makes ClearVue™ the smartest condensate pump on the market. Variable Speed and Lift provides ClearVue™ the ability to “think” and adapt to changing conditions. It’s not just off or on like a regular pump. ClearVue™ senses the amount of condensate water in the tank and its rate of inflow and adjusts its speed and lift to match the conditions and keep the tank clear. ClearVue™ starts pumping slowly and only accelerates if needed. And since it pumps slowly, ClearVue™ is super quiet and easy to live with.

With its Floatless Sensor™ technology, ClearVue™ doesn’t have the usual problems associated with float switch pumps. No more stuck floats or misaligned contacts to cause problems and potential damage. ClearVue™ uses Floatless Sensor™ technology to detect the condensate level in the tank and make the right decision about what to do next. ClearVue™ pump also features a see-through tank to give the contractor and homeowner a clear view of water, blockage, and buildup in the tank. This clear tank allows for quick troubleshooting due to normal buildup caused by daily condensate generation. ClearVue™ gives you the most improved, user-inspired features on the market.

What makes ClearVue™ Better?

- The ClearVue™ pump features Variable Speed and Lift which allows ClearVue™ to change pump speed and lift based on condensate flow. Other pumps are simply off or on but ClearVue™ starts pumping slowly, then gradually accelerates its lift if needed.
- Floatless Sensor™ technology means more reliable operation and no problems from stuck or fouled mechanical floats. ClearVue’s Floatless Sensor™ detects the condensate level without a float for reliable, accurate operation. **No float, no problems.**
- World’s only self-cleaning condensate pump. ClearVue™ features a unique self-cleaning mode to maintain itself and help keep drain lines clear. Also, if ClearVue™ senses a blockage, it will begin self-cleaning and pulse the condensate water to try to remove the blockage.
- ClearVue™ also offers a clear tank that allows the user to see what’s happening inside. This means faster and more accurate troubleshooting.



**FLOATLESS
SENSOR™**

ClearVue[™] PUMP

0-22'
Variable Speed
and Lift
Self-Cleaning



Stainless Steel
Mounting Tabs

Reversible
Deck

Clear Tank

**FLOATLESS
SENSOR[™]**

Silicone
Rubber Feet

NO FLOAT, NO PROBLEMS



Floatless Sensor[™] Technology

ClearVue's sensors tell it how high the water is in the tank and how fast the inflow is. It then adjusts pump speed and lift to keep the tank clear and the system running properly. *No float, no problems.*



Push Button Drain

Need to drain the tank quickly? Simply push the DRAIN button and ClearVue[™] removes all the water in the tank—fast.



Clear Tank

ClearVue[™] also offers a clear tank so you can easily see what's happening inside the tank. The clear tank makes it easy to see the water level and diagnose other issues if needed.



Check Valve

Removable duckbill check valve resists corrosion and wear and is self-cleaning.



Molded Silicone Rubber Feet

Specially designed rubber feet dampen vibration and noise, making ClearVue[™] quiet and easy to live with. And like the feet on all DiversiTech pumps, they are installed at the factory and stay in place.



Stainless Steel Hang Tabs

Two stainless steel hanging tabs offer many installation options. The tabs are sturdy and durable and will last longer than standard plastic mounts.



LED Indicator Lights

4 LED indicator lights – Ready, Pumping, Cleaning, and Alarm. LED lights tell you what mode the pump is in at any given time.

ClearVue™ Mini Pump

ClearVue™ Mini is the newest innovation in Ductless System pumps from DiversiTech. It's small, quiet and offers a host of unique features that help it outperform other mini-split pumps. And just like the original ClearVue™ and ClearVueKube™ pumps, ClearVue™ Mini features Variable Speed and Lift and Floatless Sensor™ technology that help the pump think and respond to changing conditions.



Look at everything ClearVue™ Mini offers:

NO FLOAT, NO PROBLEMS



Variable Speed and Lift

ClearVue™ Mini determines how fast condensate is entering the tank and adjusts its speed and lift to match the conditions and keep the tank clear.



Floatless Sensor™ Technology


No float, no problem! That's what ClearVue™ Mini's Floatless Sensor™ will provide you and your customers. ClearVue™ Mini's Floatless Sensor™ eliminates many of the typical problems associated with conventional condensate pumps. By eliminating the float, ClearVue™ Mini won't fail like conventional float-switch pumps.

ClearVue™ Mini uses Floatless Sensor™ technology in different levels in the tank to provide the most accurate water level information to the pump's brain. And better information means a better pump. ClearVue's Floatless Sensor™ technology tells it how high the water is in the tank and how fast the inflow is. ClearVue™ Mini then uses this information to adjust its pump speed and lift to keep the tank clear and the system running properly.



Super Quiet

With Variable Speed and Lift ClearVue™ Mini is nearly inaudible. You literally can hardly hear the pump run. This quiet operation allows maximum installation flexibility, as you can place the pump right in the room where people are.



Flexible Installation

ClearVue™ Mini is compact — only 3-1/2" x 2" x 3". It fits almost anywhere including inside a line set cover, inside the wall cassette unit (on some cassette models), and easily installs in the ceiling or behind a wall. ClearVue™ Mini features suction lift of up to 6.5'.



Built-in Overflow Switch

ClearVue™ Mini also include a built-in overflow switch that shuts down the compressor in case of clogged line. This prevents damage to equipment or the environment.




Aluminum Pump Housing

ClearVue™ Mini features an aluminum housing that is built to last. This tough housing protects the pump from physical damage and helps contribute to the super quiet operation of the pump.



Rubber Mounting Pad

The molded rubber mounting pad can be used to mount ClearVue™ Mini to a vertical or horizontal surface; or to copper refrigerant lines with cable ties. The rubber pad decreases sound and vibration, contributing to a very quiet pump.



Multiple Voltages

ClearVue™ Mini can be powered with any voltage from 120 to 240V, 50 or 60 Hz. With one product suitable for multiple voltages, there is no need to stock separate SKUs for different voltages.



LED Lights

ClearVue™ Mini features three LED indicator lights: Ready, Pumping, and Alarm. The LED lights tell you what mode the pump is in at any given time.



Separate Tank

ClearVue™ Mini features a separate tank that can be located away from pump if needed, providing a more flexible installation. This small tank fits inside most indoor cassettes.



2 Year Warranty

ClearVue Mini includes an extended 2 year warranty.

QUICK, EASY INSTALLATION
HIGHEST LIFT: 22FT.
SAFETY SWITCH
AVAILABLE WITH TUBING
LOW PROFILE MODELS AVAILABLE

SAVE INSTALLATION TIME WITH

CP-22

CONDENSATE PUMPS



DiversiTech Condensate Pumps



Metal Hang Tabs

Shatterproof metal hang tabs have hole-and-slot design for easy mounting. Tabs are located on convenient 8" centers.



Indicator Lights

Red, yellow, and green indicator lights show the pump status. Green for power applied, yellow for pump running, and red for high level alarm.



Overflow Safety Switch

1/4" quick connect terminals provide easy connection to the built-in overflow switch. Two terminals are provided allowing the installer flexibility to connect air handler shut-down. Switch features SPDT isolated contacts ready for connection to building automation systems.



Four Inlet Holes

Four inlets versus two or three on other pumps provide the greatest installation versatility. Inlet holes have a reinforced wall for durability.



Rubber Feet

Rubber feet dampen vibration which reduces noise.



Check Valve

Removable check valve for easy cleaning.



Vibration Isolation

An elastomeric motor mounting gasket dampens vibration.

High Rise Pan™

The High Rise Pan™ is an innovative new plastic drain pan design which allows placement of an air handler 2-3/4" above the outside lip of the pan without the need for separate, cumbersome mounting blocks. The pan has a molded-in network of risers to give a 5" lift. The risers are positioned to accept a wide variety of air handler sizes. Each riser has a specially shaped area at each end to accommodate a 2" x 2" anti-vibration pad which allows for quiet operation at all times.

Other features include heavy duty reinforcement throughout to give plenty of support as well as rolled edges for durability. One-piece plastic construction ensures no rust, leaks, or seams to split.

Each High Rise Pan™ comes complete with a Condensate Cop™ float switch, six E.V.A. anti-vibration pads, and one 3/4" PVC male adapter. Installation is straightforward and hassle-free.

Water pushes to the side of the pan preventing stagnant water from building up in inaccessible areas. This helps prevent slime and algae accumulations, eliminating call backs due to foul smells.

Now available in a Single Pack box, too!

Nestable! High Rise Pans™ take up less space.

Diversitech High Rise Pans™ are nestable, thus creating a tremendous decrease in volume needed to store and transport the pans.

FEATURE

BENEFIT

Nestable

Because DiversiTech High Rise Pans™ are nestable, there is a tremendous decrease in volume needed to store and transport the pans.



Eliminates a single line vendor

Eliminating a vendor cuts distributor costs and saves warehouse and transportation costs.

Water pushes to the side of the pan

This prevents stagnant water in inaccessible areas which helps prevent slime and algae buildup, eliminating call backs because of smell.

Includes EVA™ pads

EVA™ pads increase the overall height of the unit which increases available drain line pitch. EVA™ pads also create better sound and vibration dampening for a quieter installation, meaning less call backs due to noise.

Standard anti-vibration pad

Uses a standard, easily available anti-vibration pad, eliminating the need to stock extra SKUs of anti-vibration pads. Competitor products use specialized grommets which are not commonly available.



Installation kit includes six EVA™ pads and Condensate Cop™ float switch

The universal CC-1 can be placed anywhere on the pan. It can also be used on other secondary drain pans (metal or plastic). You will never forget a part because you have a complete kit!

80% thicker than the standard drain pan

Stronger and more durable for job site installations; resists work place installation damage, minimizing the need to replace drain pans damaged at job site.



ABS construction/flexible material

Time-tested material has been used for 15 years in the market. Flexibility allows for easier fit in tight work places and a faster installation. You'll have peace of mind for long term performance.

Heat/cold resistance

Meets structural and temperature requirements for attic installations.

5" riser

5" riser gives additional height needed to assure proper drain line pitch. Stack EVA™ pads for additional height.

Heavy-duty reinforced construction

Gives support for a wider range of air handler applications, minimizing the need to replace drain pans damaged at the job site.



Metal Drain Pan

DiversiTech introduces the ultimate in drain pan design - the seamless, nestable, metal drain pan with rolled edges.



FEATURES

BENEFITS

Seamless

The seamless design of DiversiTech metal drain pans virtually eliminates leaks from seams and folded corners found in conventional metal drain pans.

Nestable

Because DiversiTech drain pans are nestable, there is a tremendous decrease in volume needed to store and transport metal drain pans. A stack of seventy DiversiTech metal drain pans is only 12" high. Therefore, seventy DiversiTech pans fit in the same space as six conventional 2" deep non-nesting drain pans!

Single Piece Design

The DiversiTech metal drain pan is stamped from a single sheet of 26 gauge galvanized steel which prevents leaks.

Rolled Edge


The rolled edge virtually eliminates hand injuries during handling.

Two Outlets

Easy, flexible installation with an outlet on both the long and short side of the pan — no need to cut an outlet if you have the wrong pan on the job.

Fittings Included

Get everything you need for the installation of the pan in a single package. Fittings are included with DiversiTech metal drain pans.

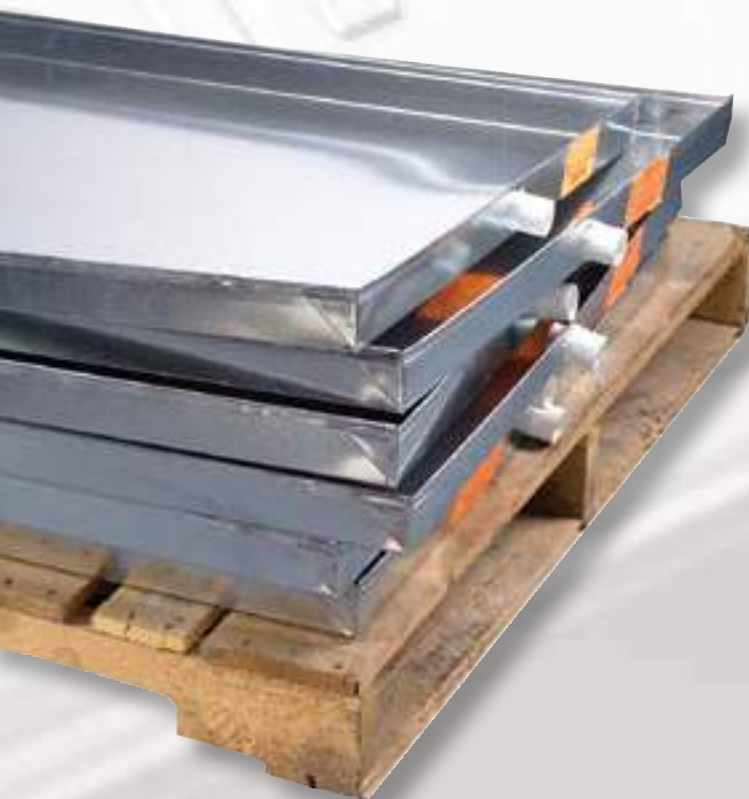

A stack of
70 DiversiTech
metal drain pans
is only
12" high!

70 DiversiTech drain pans fit in the same space as 6 conventional 2" deep non-nesting drain pans!

Safety Overflow Switch (SOS™)

What is the Safety Overflow Switch (SOS™)?

Designed for use on 3/4" PVC condensate drain line, the SOS snaps easily over existing drain line tubing and can be glued in place using PVC cement.

The SOS electronically senses water near the inside wall of the PVC drain tubing. By locating the SOS with its body away from the normal flow, it can detect a possible overflow condition when the PVC drain line becomes full with water. Like a culvert, a condensate drain line is normally mostly empty with a small amount of water flowing in the lower parts of the horizontal run. Since the SOS's sensor component only covers part of the tubing, a low volume of flowing water does not activate the switch. The pipe must be full or near full to activate the switch. The SOS can be mounted horizontally, vertically, or at any angle.

The SOS works with 24 VAC control circuits and typical contactors. When not detecting water, it is normally closed and allows normal air conditioner operation. When water nears the SOS's sensor, the switch triggers and the control circuit is opened. Then, the LED indicator lights to show that there may be system trouble.

Furnished complete with switch, 5' (1.5 meter) 18 AWG, 2 wire lead, and a 3/4" PVC male fitting adapter for direct coupling to a primary pan drain line connection.



- SOS electronically senses water in the PVC drain tubing.
- SOS is designed for use on 3/4" PVC condensate drain line.
- SOS snaps easily over existing drain line tubing.



Furnished with a tube adapter for direct connection to a secondary port.





**Faster
Install**

Hinged Fast Lock Clamp

Hinged clamp bar self adjusts to angle of pan wall for a level switch. One-step installation with single screw fastener. Single screw fastens switch to pan – no drilling and no fussing with multiple thumb screws.



**Works
Everywhere**

Universal Pan Mount

Easy twist to adjust to pan walls of 0, 8, 15 or 22 degrees. Fast, simple, easy, and level installation on metal or plastic pans for reliable moisture detection. Angled installation on other switches reduces their ability to detect condensate overflow.

CS1200 AC Shutoff Switch

The CS1200 Multi-Position AC Shutoff Switch from DiversiTech is a reliable, easy to use float switch that clips on to any pan size. Designed with contractor feedback in mind, the CS1200 features an adjustable housing that twists to match any pan angle for easy installation. The CS1200 detects water in the pan quickly and shuts off the equipment to prevent damage. The CS1200 also includes these great features:

- Hinged fast lock clamp
- LED Indicator light
- Universal pan mount
- Large water openings for fast detection
- Push to test button
- Simple 2 wire installation
- 5 AMP switching, 24 Volt



LED Indicator Light

Easy to see visual trip indicator alarm displays red if switch is tripped. CS1200 is the only pan switch with a light for fast troubleshooting.



Push to Test

Know instantly with the push of a button that your switch is installed and functioning properly. The bright LED indicator visually confirms proper operation.



Reliable Mechanical Contact Float Switch

Trouble free design reduces overflow failures and call backs. All electronics are mounted above the waterline, eliminating the chance of malfunction. The one piece molded float protects switch from water and debris. This is the same design used for safety interlocks because it gives you years of reliable, maintenance free service.



10x Open Area

10 times more open area for water to enter the detection chamber with our large open area design. No detection failure from small holes that can get clogged. Prevents switch failure from clogged water holes. No call backs due to clogged switches.




Simple 2 Wire Installation

With a simple 2 wire connection, the CS1200 is simple, easy, and fast to install. No checking polarity, just connect the switch in the red or yellow wire. Simple well designed electrical connections using 6 feet of the standard 18AWG wire and high current (5 amp) switching. The CS1200 gives you everything you need in one simple switch.



Clear Design

CS1200 is the only pan switch with a clear design for fast troubleshooting. Clear design lets you see the float and switch. Know instantly that the switch is working and components are functioning.



RECOGNIZED
COMPONENT



Intertek

Wet Switch Flood Detector

WHAT IS THE WET SWITCH?

The Wet Switch is a solid state device designed to detect the presence of condensate water overflow. The Wet Switch is placed into the secondary drain pan — a normally dry pan. If the primary drain pan fails, condensate water will overflow into the secondary drain pan. Upon sensing moisture, the Wet Switch will turn the system off (typically the cause of the condensing water) to help prevent damage to carpets, walls, woodwork, ceilings, and other property.

- Hydrophilic Pad
- Integral Feet
- Stainless Steel Sensor Array
- Solid State Electronics
- Epoxy Encapsulated Electronics
- Double Throw Relay
- Standard 24VAC control
- Multiple Unit Connectivity

The Wet Switch is designed to interrupt the operation of cooling systems. However, it is a water activated switch and can be used in a variety of other applications.



HYDROPHILIC PAD



INTEGRAL FEET



STAINLESS STEEL SENSORS

HYDROPHILIC PAD

A high tech polymeric fiber quickly draws water into the sensor array using proven capillary technology.

INTEGRAL FEET

Integral feet raise the hydrophilic pad and sensor array off the drain pan slightly to prevent nuisance tripping and pan corrosion (metal pans only) from interfering with the sensor array.

STAINLESS STEEL SENSOR ARRAY

A high tech array of multiple stainless steel sensors detects even a minimal amount of water drawn into the hydrophilic pad.

COMPACT PACKAGE

This technology is packed into a 3-5/8" diameter by 1-1/4" high cylinder. Furnished complete with 5-conductor 22AWG stranded cable, 6' long.

DOUBLE THROW RELAY


Allows for wiring to interrupt system and to sound an alarm (by others) when moisture is detected.

SOLID STATE ELECTRONICS

Proven electronics prevent mechanical failure in an aggressive operating environment.

MULTIPLE UNIT CONNECTIVITY

Multiple unit connectivity allows for multiple Wet Switches to be connected in series to adequately cover large drain pan areas.

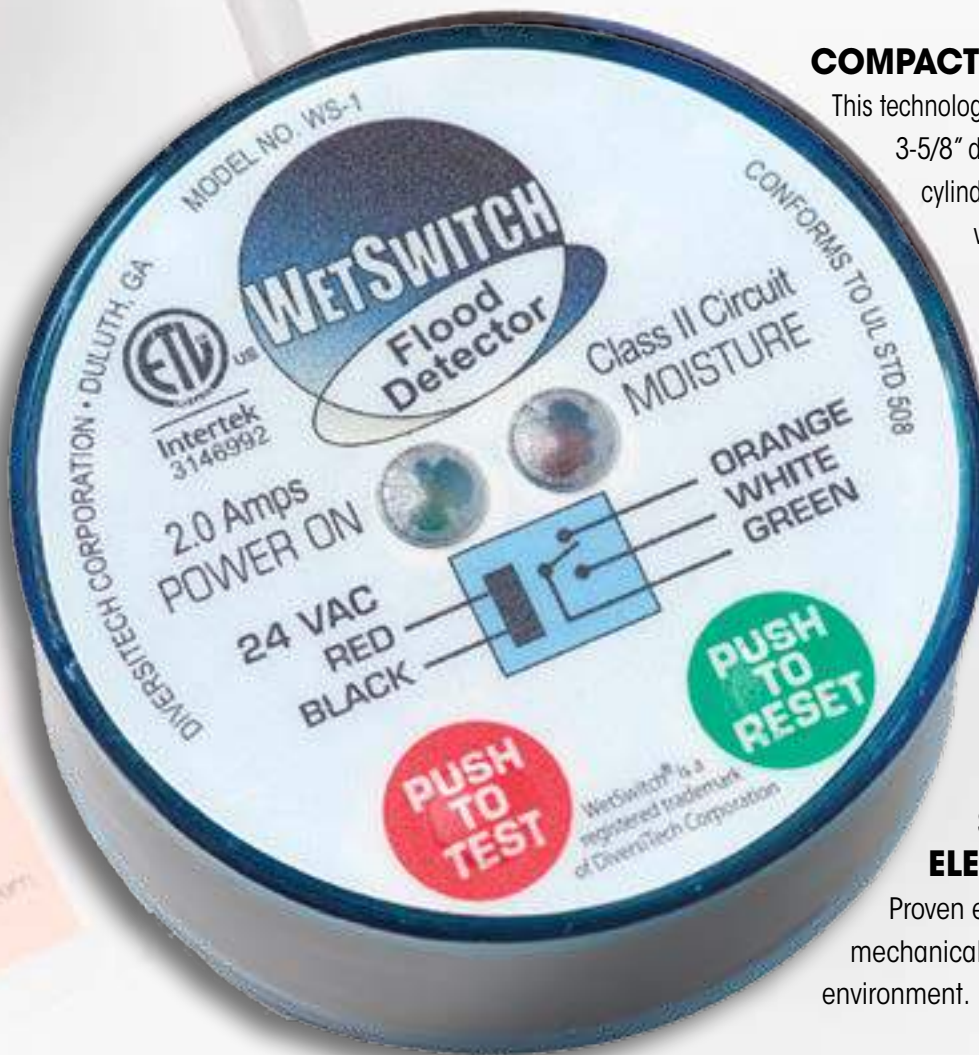

Drain Gun - Charles Gallo Brand

The Drain Gun - Charles Gallo Brand is a lightweight (3oz.) portable tool designed to blow out condensate drain lines instantly. Simply insert a Swoosh CO₂ cartridge into the Charles Gallo Drain Gun and with a press of the trigger — SWOOSH — 800 psi of oil free air clears the line.

INSTRUCTIONS:

- Unscrew cup and insert cartridge with the narrow end up.
- Without depressing the trigger, screw the cup slowly into the head until the cartridge contacts the puncture pin.
- Quickly and firmly screw the unit together to puncture and seal the cartridge in the same motion.
Note: Not completely screwing the unit together may result in escaping gas.
- Release the red safety catch.
- Depress the trigger to discharge the Swoosh CO₂ cartridge. For condensate drains, a quick and full discharge is best.

The Drain Gun - Charles Gallo Brand is for use with condensate drain and oil burner lines only.



SMALL AND LIGHTWEIGHT

The Drain Gun packs cleaning power into a small, lightweight package. This prevents the need for carrying heavy air or nitrogen tanks.

AIR POWER

The Drain Gun uses CO₂, eliminating the mess caused by water back flushing drain lines.

ENVIRONMENTALLY FRIENDLY

The Drain Gun uses carbon dioxide (CO₂), a common component of air, and is totally safe for use in the environment. The Drain Gun is an excellent alternative to the environmentally unfriendly practice of using refrigerant to clean the drain line.

FLEXIBLE HOSE ASSEMBLY

The flexible hose assembly enables you to maneuver through cabinets, coils, and hard to reach drains.

ADAPTER KIT

An adapter kit is available to allow for use on oil burner lines and tighter areas with a 90° fitting.

Fittings increase the versatility of the innovative Drain Gun and are available from your distributor.

90° FITTING FOR TIGHT AREAS



FITTING FOR OIL BURNER LINES



FITTING FOR LARGER DRAINS



Condensate Drain Line Cleaners

DiversiTech offers a family of products designed to help make condensate drain line cleaning faster and easier. From the super lightweight handheld Charles Gallo Drain Gun to the full power of the DrainDawg, DiversiTech has the right solution for every need. These products also have multiple other uses including operating air power tools, purging and testing copper tubing and more.



HANDHELD POWER

- Clears condensate drain lines with a SWOOSH!
- Lightweight and portable - goes anywhere
- Environmentally friendly
- Uses CO₂ refill cartridges



PORTABLE POWER

- Uses Nitrogen or CO₂
- Lightweight and portable
- Includes boxed fitting kit
- Easy to refill at your truck
- Multiple uses
- Includes inflatable DrainDawg fitting to clear lines fast



ULTIMATE POWER

- Uses Nitrogen or CO₂
- Includes 10' flexible hose and blowgun assembly
- Includes boxed fitting kit
- Multiple uses
- Includes inflatable DrainDawg fitting to clear lines fast



A/C Easy Tee®

The A/C Easy Tee® from DiversiTech is the easy way to unclog and clean drain lines in just seconds. It installs quickly and provides permanent, fast access for routine drain line maintenance. And with the Service Tool Kit adapters you can use water or compressed gas to quickly clean out the lines to maintain proper flow. Ideal for both commercial and residential systems.



**Make your
service calls
faster and
simpler with the
A/C Easy Tee®.**



Flexible to Use

The A/C Easy Tee® can be installed in many different ways. There is no designated inlet or outlet. Both connections can be either. The Service Tool Kit allows the technician to close off backflow creating full discharge of water or nitrogen to clean out the drain line. It can also be used with a wet/dry vac to suction dirt, debris, and gunk out of a primary drain pan.



Code Required

A Service Port – also called a Cleanout – is required by code (IMC - M32-12). Don't get your jobs red tagged by code inspectors. Install an A/C Easy Tee®.



Simple Design

The A/C Easy Tee® Service Port is a compact, simple design with no moving parts. Small, fiddly parts can and will fail. The A/C Easy Tee® has a simple cap that screws off for easy access to the condensate drain line.



No Drainage Block

Featuring a simple, easy design without flappers or ball valves like other products. Flappers and ball valves can fail or be left closed in the drain line.

www.aceasytee.com

CONDENSATE PUMPS

ClearVue™ Pump

No Float, No Problems! ClearVue's Variable Speed and Lift and Floatless Sensor™ make this the most advanced condensate pump ever. This new pump can provide up to 22' of lift if needed. ClearVue™ runs at the minimum speed needed, saving wear on the pump. The pump selects the lowest effective speed, making it quieter than a regular pump. Its unique self cleaning feature senses problems and automatically enters a self cleaning mode using condensate water to fix the issue. The ClearVue™ pump features a clear bottom tank to easily check the water level. Other features include: stainless steel mounting tabs, silicone rubber feet, reversible deck, four inlet holes, and LED indicator lights. ETL Listed File Number 3190890



IQP-120

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IQP-120	ClearVue™ Pump – 120V – 0-22' Lift	EA	6
IQP-120T	ClearVue™ Pump w/Tube – 120V – 0-22' Lift	EA	6

ClearVue™ Mini
Ductless System Pump

Featuring super quiet operation, specifically designed for ductless system installations, and including Variable Speed and Lift and Floatless Sensor™, ClearVue™ Mini is chock full of innovative features, and priced competitively.



CVMINI

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CVMINI	ClearVue Mini - Ductless System Pump	EA	6

ClearVueKübe™

ClearVueKübe™ Pump condensate pump is the answer for ductless systems. Featuring a whisper quiet motor and small footprint, it is the ideal solution for handling condensate issues. The Kübe is designed for mini split systems and includes a host of innovative features, all packed into a super quiet, super small pump that fits almost anywhere. ClearVueKübe™ is also available with a shroud cover set.



IQP-KUBE

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IQP-KUBE	ClearVueKübe™ only	EA	6
IQP-KUBE-SHROUD	ClearVueKübe™ with shroud	EA	6

Pump Parts & Accessories

Check valve installs easily and prevents water from travelling backwards into the pump and overflowing.



CP-CV

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-CV	Replacement Check Valve for CP-22	EA	1
CP-CVCF	Replacement Check Valve – 3/8" compression fitting	EA	1

CP-22 Pumps

Suitable for use with condensate from high efficiency condensing furnaces and boilers which produce acidic condensate. 22' of lift compared to the typical 20'. Features include vibration dampening feet and motor mounts, metal hang tabs, four inlet holes, a clear indicator display, a float switch and check valve. Integrating the CP-22 into your system is easy. 1/4" quick connect terminals provide easy connection to the built in overflow switch. 2 terminals are provided allowing flexibility to connect air handler shut down. UL Listed File Numbers E253155 and E258186.



CP-22

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-22	Condensate Pump – 120V	EA	6
CP-22T	Condensate Pump – 120V w/20' 3/8" Tube	EA	6
CP-22-230	Condensate Pump – 230V	EA	6
CP-22-230T	Condensate Pump – 230V w/20' 3/8" Tube	EA	6

CP-22 Low Profile Pumps

The new CP-22LP comes packed with all the same great features found in the CP-22, but now in a low profile package. This pump is only 4-3/8" tall so it's a good fit for those instances where space is at a premium. The shorter reservoir holds 1/3 gallon. Suitable for use with condensate up to 160 degree F. UL Listed File Numbers E253155 and E258186.



CP-22LP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-22LP	Condensate Pump – 120V – Low Profile	EA	6
CP-22LP-230	Condensate Pump – 230V – Low Profile	EA	6

General Purpose Pumps

The DiversiTech CP-16 condensate pump is an economical alternative that's based off of the proven CP-22 design. More compact than the CP-22, it's designed to lift to a maximum of 16 feet. The CP-16 shares many of the great features of the CP-22, including hang tabs, four inlet holes, float switch, overflow switch, and a check valve. UL Listed File Numbers E253155 and E258186.




CP-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CP-16	Condensate Pump 16' Lift 120V	EA	6
CP-16-230	Condensate Pump 16' Lift 230V	EA	6

CONDENSATE DRAIN LINE SWITCHES

Condensate Cop™

Condensate Cop™ is a unique clamp on float switch intended for HVAC drain pan installation. The Condensate Cop™ features a large over clamping area that fits easily over the edge of all types of drain pans; including formed plastic and galvanized sheet metal. A separate float/probe assembly swivels to accommodate drain pans having sloped sides. The swivel action allows the installer to position the float switch for best operation and then clamp it into place. The probe features an inlet grill which prevents the float from being blocked or damaged by insulation or other debris. Sealed inside the probe is a magnetically actuated normally closed switch. The switch opens when rising water presents a potential flooding condition. Two wire connection for easy hook up to a thermostat "Y" (compressor) circuit. Provided complete with 5' (1.5 meter) leads, wire nuts, and clamping screws. Small size, 24V/1.5 amp NC reed switch. ETL Listed File Number 3166285. UL508 Approved.



CC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CC-1	Condensate Cop™ Drain Pan Switch	EA	12

Safety Overflow Switch (SOS)

Designed for use on 3/4in. PVC condensate drain line. Snaps easily over existing drain line tubing and can be glued in place using PVC cement. The SOS electronically senses water near the inside wall of the PVC drain tubing. By locating the SOS with its body away from the normal flow, it can be used to detect a possible overflow condition when the PVC drain line becomes full with water. Like a culvert, the condensate drain line is normally mostly empty with a small amount of water flowing in the lower parts of the horizontal run. Since the sensor component of the SOS only covers part of the tubing, a low volume of flowing water does not activate the switch. The pipe must be full or near full to activate the switch. Mount SOS horizontally, vertically, or at any angle. Works with 24 VAC control circuits and typical contactors. When not detecting water, the SOS is normally closed and allows normal air conditioner operation. When water approaches the SOS's sensor, the switch triggers, and the control circuit is opened. The LED indicator lights to show that there may be system trouble, and the SOS is doing its job. Furnished complete with switch, 5' (1.5 meter) 18 AWG, 2 wire lead, and a 3/4 in. PVC male fitting adapter for direct coupling to a primary pan drain line connection. Now available with Push to Test button.



SOS-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SOS-1	Safety Overflow Switch	EA	1

Patents pending.

CS1200 AC Shutoff Switch

The CS1200 is a fast installing, reliable, condensate overflow detection switch. Featuring a unique universal pan mount design to assure accurate detection in metal or plastic secondary drain pans. UL508 Approved.



CS1200

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CS1200	CS1200 AC Shutoff Switch	EA	12

Universal Alarm

A universal low voltage alarm that can indicate possible system trouble. Use with the Wet Switch, SOS, Condensate Cop, CP 22 (all types) and all float switches on 24VAC control circuits. If an alarm condition exists, the homeowner can turn the alarm off with a "silence" button until service is obtained, however a red trouble LED will remain lit. Also features: easy 2 wire connection, label to print contractor information, and low current draw. Actuates at greater than 18V to prevent any false alarms due to low voltage. Includes 2 wire nuts, a sheet metal screw, and double sided tape for convenient installation options. Also includes instructions for wiring normally open switch systems (for the CP 22 or other condensate pumps).



UA-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
UA-1	Universal Alarm for 24VAC	EA	12

Wet Switch Flood Detector

A solid state control designed to help prevent flooding, damage to carpets, walls, furniture, ceilings, etc. Now has a built in test and reset button for easier installation. Turns system off when detecting moisture due to condensate or drain leaks. One or two drops will cause Wet Switch to turn off a unit, alerting a serviceman to a moisture problem. A lit LED indicates the Wet Switch is activated and has turned the unit off. Reset simply by drying the absorbent pad with a paper towel and pressing the reset switch. Connects to 24 VAC. More than one unit may be connected to a system. 2 amp contact rating. Simple 5 wire installation. Sales displays available. ETL Listed File Number 3146992. UL508 Approved.



WS-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WS-1	Wet Switch Flood Detector	EA	1

Pipe Mounted Switches

DiversiTech Flood Prevention Switches are simple to install, easy to service and extremely reliable. As water level in the auxiliary or main drain pipe rises due to a clogged air conditioning condensate drain, the switch shuts off the system - thus preventing water from overflowing and causing damage to doors, walls and ceilings. At the heart of the switch is a durable yet precise magnetic reed switch. Constructed of materials that will not rust or stick, the switch operates smoothly every time. UL508 Approved.



CS-1

CS-2


CS-3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CS-1	Condensate Switch - Tee	EA	12
CS-2	Condensate Switch - Elbow	EA	12
CS-3	Condensate Switch - Clip	EA	12

CLEARVUE™ TUBE & TRAPS

ClearVue™ Tube

Clear, schedule 40 PVC ideal for installing as condensate drain lines in other areas where seeing the inside of the tubing is helpful. ClearVue™ Tube makes it easy to quickly spot build up or obstructions in drain lines for faster troubleshooting. Available in 5ft lengths.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CV-TUBE	ClearVue™ Tube – 5' section	EA	50

Drain Trap Kits


Drain trap kits feature clear PVC traps with multiple cleanouts for easy maintenance. Available in several fitting styles with or without float switch to match any installation need.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DTK113	Drain Trap Kit, 3/4 in Blow Molded	EA	1
DTK113B	Drain Trap Kit, 3/4 in, w/Brush	EA	1
DTK205	Drain Trap Kit, 3/4 in, Deep w/switch	EA	1
DTK207	Drain Trap Kit, 3/4 in, Standard w/switch and cross	EA	1
DTK210	Drain Trap Kit, 3/4 in, Standard w/switch	EA	1

ClearVue™ Traps

DiversiTech introduces new ClearVue™ P and R traps. These traps are made from smooth, clear PVC with no flat spots to restrict flow. With these new ClearVue™ traps its easy to see directly into them to detect blockages and prevent problems before they become severe. Ideal for installation in condensate drain lines.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CV-PTRAP	ClearVue™ 3/4" P trap	EA	25
CV-RTRAP	ClearVue™ 3/4" R trap	EA	25

Drain Trap Kit Cross Reference

DIVERSITECH CATALOG NO.	RECTORSEAL PART NO.
DTK113	EZT-113
DTK113B	EZT-113B
DTK205	EZT-205
DTK207	EZT-207
DTK210	EZT-210

CONDENSATE DRAIN LINE CLEANING

Flow-Plus™ Inline Cleaner

Flow Plus™ Inline Cleaner installs in the 3/4in. condensate drain line to maintain clean condensate water and pump operation (if applicable). Unique design allows Flow Plus™ tablets to dissolve slowly, maintaining condensate flow for up to eight months. User replaceable tablet pack.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IC-1	Flow-Plus™ Inline Cleaner	EA	6
IC-1R	Flow-Plus™ Replacement Cartridge	EA	12

Drain Gun™ - Charles Gallo Brand and SWOOSH CO₂ Cartridges

Clears condensate drains with a SWOOSH! A lightweight (3 oz.) portable tool designed to blow out drain lines instantly. New larger SWOOSH CO₂ cartridges now deliver 800 PSI of oil free air to clear the line. Each unit comes equipped with a tapered fitting to work on 3/8in. – 3/4in. drain openings. Flexible hose assembly maneuvers through cabinets, coils and hard to reach drains. Cartridges are environmentally safe and recyclable. No need for air or nitrogen tanks. Reduces labor costs and time on service calls.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GG-1	Drain Gun™ for A/C Condensate Lines	EA	6
GGC-12	SWOOSH CO ₂ Cartridges, pack of 12	PK	6
GGC-6	SWOOSH CO ₂ Cartridges, pack of 6	PK	6
GG-1A	Drain Gun™ Adapter Kit	EA	1
GG-1H	Drain Gun™ Hose Assembly	EA	1
GG-1TF	Drain Gun™ replacement tip	EA	1
GG-1BOR	Drain Gun™ bottom o-ring, pack of 5	PK	1
GG-1NHL	Drain Gun™ body, no hose	EA	1

DrainDawg™

The DrainDawg™ is a complete condensate drain cleaning kit, including the CT-475M deluxe nitrogen / CO₂ 0-475 psi regulator, the TG-10 & BS-25 ten foot hose and blowgun assembly, and the CW-15 fifteen inch whip hose. Also included is the AP-DD DrainDawg™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CK-141 3/4"-1" cone fitting, the FA-02 CO₂ to nitrogen adapter, the QN-S3 needle tip, and the TC-25 tire chuck. Made in USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CB-2	DrainDawg™ Kit	EA	3

DrainKat™

The DrainKat™ is an over the shoulder refillable, nitrogen or CO₂ mini drain cleaning kit. Featuring a small cylinder that holds 9 cubic feet of nitrogen or 2-1/2 pounds of CO₂. The cylinder includes an integral mounted regulator for quick and easy adjustment of discharge pressure. Get exactly the amount of pressure you need with a quick adjustment on the regulator. Furnished complete with an 87" hose and drain gun kit, the CW-15 whip hose, and the AP-DK DrainKat™ Accessory Fitting Kit which contains the DF-75 DrainDawg™ inflatable tip, the CB-03 3/4"-1" cone fitting, the FA-01 male to male CO₂ to nitrogen adapter, the FA-03 CO₂ trans-fill adapter, and the QN-S3 needle tip. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MBK-6	DrainKat™ Kit	EA	2

CONDENSATE DRAIN LINE CLEANING *cont'd***A/C Easy Tee®**

A/C Easy Tee® is a simple, inexpensive way to comply with the International Mechanical Code M32-12. It provides a Condensate Drain Service Port that is flexible and easy to use with nitrogen, water, or shop vac. A/C Easy Tee® has no valve or moving parts that could fail.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET75	A/C Easy Tee®	EA	20
ET75-KIT	A/C Easy Tee® Kit - 2 Tees and ST75	EA	6
ST75	Service Tool Kit	EA	6

ET75

**Drain Dawg™ and Drain Kat™ Fittings**

The Drain Dawg™ and Drain Kat™ products are compatible with a series of fittings to connect to condensate drain lines and hoses. The fittings are available individually, or as kits for the Drain Dawg™ and Drain Kat™.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AP-DD	Drain Dawg™ Accessory Pack	EA	1
AP-DK	Drain Kat™ Accessory Pack	EA	1
BS-25	Blow gun with safety tip for Drain Dawg™ or Drain Kat™	EA	1
CB-03	3/4 in. cone tip with female thread for Drain Dawg™ or Drain Kat™ blow gun	EA	1
CK-141	3/4 in. cone with male thread for use with whip hose for Drain Dawg™ or Drain Kat™	EA	1
CW-15	15 in. whip hose for Drain Dawg™ or Drain Kat™	EA	1
DF-75	Drain Dawg™ inflatable tip for drain line blowout	EA	1
FA-01	Nitrogen to CO2 adapter, male by male for Drain Kat™	EA	1
FA-02	Nitrogen to CO2 adapter, female by female for Drain Dawg™	EA	1
FA-03	CO2 transfill adapter for Drain Kat™	EA	1
QN-S3	Needle tip with female thread for Drain Dawg™ or Drain Kat™ blow gun	EA	1
TC-25	Tire chuck for Drain Dawg™	EA	1
TG-10	120 in. blow gun hose for Drain Dawg™	EA	1
TG-87A	87 in. blow gun hose for Drain Kat™	EA	1

DF-75



CONDENSATE DRAIN PANS, FITTINGS, ADAPTERS

A/C Secondary Condensate Drain Pans

Rolled edges for durability, ribbed bottoms for rigidity, and reinforced corners for strength. 3/4in. PVC fittings are included with each pan. No seams, no rust, and no leakage. ABS materials will not put out toxic smoke. Available in over 20 convenient sizes. Five pans per clip.

CATALOG NO.	BOTTOM DIMENSION IN.	BOTTOM DIMENSION CM.	OVERALL DIMENSION IN.	OVERALL DIMENSION CM.	DEPTH IN.	DEPTH CM.	UOM	ORDER MULTIPLE
6-1838L	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-1838S	18" x 38"	46 x 97	20" x 40"	51 x 102	2"	5	EA	5
6-1846L	18" x 46"	46 x 117	20" x 48"	51 x 122	2"	5	EA	5
6-1846S	18" x 46"	46 x 117	20" x 48"	51 x 122	2"	5	EA	5
6-2424L	24" x 24"	61 x 61	26" x 26"	66 x 66	2"	5	EA	5
6-2626L	26" x 26"	66 x 66	28" x 28"	71 x 71	2"	5	EA	5
6-2739L	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5
6-2748L	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
6-2748S	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
6-2748L-100	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	100
6-2763L	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5
6-2763S	27" x 63"	69 x 160	29" x 65"	74 x 165	2"	5	EA	5
6-3030L	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5
6-3050L	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5
6-3050S	30" x 50"	76 x 127	32" x 52"	81 x 132	2"	5	EA	5
6-3060L	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3060S	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
6-3060L-100	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	100
6-3263L	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3263S	32" x 63"	81 x 160	34" x 65"	86 x 165	2"	5	EA	5
6-3636L	36" x 36"	91 x 91	38" x 38"	97 x 97	2"	5	EA	5
6-3660L	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5
6-3660S	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5

L = Drain Line Outlets in Long Side

S = Drain Line Outlets in Short Side

6-1838L



CONDENSATE DRAIN PANS, FITTINGS, ADAPTERS *cont'd*

High Rise Pans™

The High Rise Pan™ is an innovative new plastic drain pan design which allows placement of an air handler 2 3/4in. above the outside lip of the pan without the need for separate, cumbersome mounting blocks. The pan has a molded in network of risers to give a 5in. lift. The risers are positioned to accept a wide variety of air handler sizes. Each riser has a specially shaped area at each end to accommodate a 2in. x 2in. anti vibration pad which allows for quiet operation at all times. Other features include heavy duty reinforcement throughout to give plenty of support as well as rolled edges for durability. One piece plastic construction ensures no rust, leaks, or seams to split. Each High Rise Pan™ comes complete with a Condensate Cop™ float switch, 6 EVA™ anti vibration pads, and 1 3/4in. PVC male adapter. Installation is straightforward and hassle free.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HK2748	High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2748-1	Single Pack Kit – High Rise Pan™ 27" x 48" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK2766	High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK2766-1	Single Pack Kit – High Rise Pan™ 27" x 66" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3050	High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3050-1	Single Pack Kit – High Rise Pan™ 30" x 50" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1
6-HK3060	High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	5
6-HK3060-1	Single Pack Kit – High Rise Pan™ 30" x 60" with Installation Kit including: One CC-1 Condensate Cop, Six MP-2E 2" x 2" EVA™ Pads, One 6-1 3/4" PVC male adapter	EA	1



6-HK2748



Heavy Duty High Rise Pans

A thicker, tougher version of our regular High Rise Pans. Each pan includes a kit with one CS1200 float switch, six EVA™ anti-vibration pads and one 3/4" PVC male adapter.



6-HK3060HD

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HK3050HD	Heavy Duty High Rise Pan 30" x 50"	EA	5
6-HK3060HD	Heavy Duty High Rise Pan 30" x 60"	EA	5
6-HK3070HD	Heavy Duty High Rise Pan 30" x 70"	EA	5

Furnace Pans

DiversiTech furnace pans are designed specifically for furnace installations. Their one piece construction provides strength and durability for any furnace installation.



6-HK3378FUR

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HK3364FUR	Furnace Pan – 33" x 64" with installation kit	EA	
6-HK3378FUR	Furnace Pan – 33" x 78" with installation kit	EA	

Metal Drain Pan

The ultimate in drain pan design — tailored for easy distribution and installation. Full of features to make life easier on both the distributor and the contractor. Seamless, one piece metal construction with rolled edges on all sides for maximum safety and integrity. Nestable as well — a stack of 70 pans is only a foot high! Once on site, you'll never have to return to the distributor for missing parts. The fittings are packaged with the pan for simple and efficient installation. Choose between two possible drain outlet positions and install with confidence.



6-M2748

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-M2748	26 Gauge Metal Drain Pan – 27" x 48"	EA	5
6-M2763	26 Gauge Metal Drain Pan – 27" x 63"	EA	5
6-M3030	26 Gauge Metal Drain Pan – 30" x 30"	EA	5
6-M3050	26 Gauge Metal Drain Pan – 30" x 50"	EA	5
6-M3060	26 Gauge Metal Drain Pan – 30" x 60"	EA	5
6-M3263	26 Gauge Metal Drain Pan – 32" x 63"	EA	5

A/C Condensate Drain Pan Fittings

The Drain Pan Fittings are designed to be used with our Condensate Drain Pans.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-1	3/4" Slip	EA	50
6-2	1" Slip	EA	50
6-3	3/4" Slip with Plastic Nut	EA	50
6-5	3/4" Female Pipe Thread	EA	50

CONDENSATE DRAIN PANS, FITTINGS, ADAPTERS *cont'd*

Mini-Split Drain Adapters

Mini Split fan units — either ceiling cassettes or wall cassettes — typically have a unique (metric) drain line fitting. DiversiTech's adapters convert this metric fitting to standard drain line tubing sizes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DLFY	Mini-Split Drain Line Wye	EA	1
230-DLF16	16mm Mini-Split Drain Line Adapter	EA	1
230-DLF18	18mm Mini-Split Drain Line Adapter	EA	1
230-DLF20	20mm Mini-Split Drain Line Adapter	EA	1
230-DLF25	25mm Mini-Split Drain Line Adapter	EA	1
230-DLF32	32mm Mini-Split Drain Line Adapter	EA	1

Condensate Drain Pans

When a mini split system operates in heat pump mode, the outdoor coil becomes the evaporator coil. Typically, condensation generates from the evaporator coil. In certain installations, the condenser coil may be mounted overhead on brackets affixed to a wall. In these overhead applications, dripping condensation may be a nuisance. Condensate drain pans bolt onto the condenser mounting brackets, and the drain line can be plumbed to a nearby drain location. Furnished complete with all mounting hardware and drain pan outlet, condensate drain pans are available in either plastic or powder coated steel.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DPPL	Poly Condensate Drain Pan (Large)	EA	1
230-DPML	Metal Condensate Drain Pan (Large)	EA	1
230-DPPM	Poly Condensate Drain Pan (Medium)	EA	1
230-DPMM	Metal Condensate Drain Pan (Medium)	EA	1

DRAIN LINE, TUBING

Mini-Split Condensate Drain Line

A unique drain line for mini-split units. This large diameter drain line is typical for mini-split installations. Furnished in 160 feet lengths with cut marks every 3.28 feet. Accommodates 5/8" and 3/4" connections.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DL16	5/8" ID Mini-Split Drain Line	EA	160'
230-DL16-20	5/8" ID Mini-Split Drain Line – 20' section	EA	1

Gorilla Tube™ Clear Vinyl Tubing

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines, and humidifier overflows. Several sizes from 1/4" to 1" diameter. Non-toxic clear vinyl chloride. Select Gorilla Tube™ over standard clear vinyl tube because:

- Extra rigid design resists crimping and kinking due to durometer value of 80 (Shore A) and thicker wall
- Maximum service temperature 140°F (60°C)
- Better performance in cold weather climates.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-14P	1/4", .250" I.D., .360" O.D., .055 wall thickness	EA	100'
7-38P	3/8", .375" I.D., .495" O.D., .060 wall thickness	EA	100'
7-12P	1/2", .500" I.D., .631" O.D., .066 wall thickness	EA	100'
7-58P	5/8", .625" I.D., .771" O.D., .073 wall thickness	EA	100'
7-34P	3/4", .750" I.D., .913" O.D., .082 wall thickness	EA	100'
7-78P	7/8", .875" I.D., 1.050" O.D., .088 wall thickness	EA	50'
7-10P	1", 1.000" I.D., 1.215" O.D., .108 wall thickness	EA	50'

Clear Vinyl Tubing

Clear vinyl hose applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-316	3/16" ID Clear Vinyl Tubing – 100' section	EA	100'
7-CVMINITUBE	3/16" ID CVMINI Tubing – 100' section	EA	100'
7-14	1/4" ID Clear Vinyl Tubing – 100' section	EA	100'
7-38	3/8" ID Clear Vinyl Tubing – 100' section	EA	100'
7-12	1/2" ID Clear Vinyl Tubing – 100' section	EA	100'
7-58	5/8" ID Clear Vinyl Tubing – 100' section	EA	100'
7-34	3/4" ID Clear Vinyl Tubing – 100' section	EA	100'
7-78	7/8" ID Clear Vinyl Tubing – 100' section	EA	50'
7-10	1" ID Clear Vinyl Tubing – 100' section	EA	50'

TAPES

Cork Insulation Tape

Adheres firmly to all metals. Use on hot or cold pipes to stop condensation and drips.

6-330



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-330	Cork Insulation Tape – 1/8" x 2" x 30' Roll – Black	EA	12

Foam Insulation Tape

Superior self-adhesive foam tape can be used on hot or cold pipes. Fits well around valves and fittings. Easily cut and molded.

6-9718



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-9718	Foam Insulation Tape – 1/8" x 2" x 30' Roll – Black	EA	12

PTFE Tape

Made of pure white PTFE. Non toxic. For use with chemicals, solvents, oxygen, and on food lines. Withstands up to 2000 psi of pressure.

6-733



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-733	Teflon Tape – 1/2" x 520"	EA	100
6-734	Teflon Tape – 1/2" x 260"	EA	100
6-735	Teflon Tape – 3/4" x 520"	EA	100
6-736	Teflon Tape – 3/4" x 260"	EA	100

GENERAL INDUSTRIAL

Abrasive Cloths.....	78
Aerosols.....	78
Batteries By Rayovac®.....	79
Carton Sealing Tape and Dispenser	79
Contact Cleaners.....	79-80
Degreasers.....	80
Drop Cloths	80
Hand Cleaners.....	80
Industrial Towels	81
Lubricants	81-82
Markers.....	83
Paints and Primers	83
Safety Supplies, Devices	84
Sealant, Epoxy, Glue.....	85
Sealing Compounds, Adhesive.....	85-87
Sheet Metal Screws	87-88
Wasp, Hornet, and Yellow Jacket Killers.....	88



ABRASIVE CLOTHS

All Purpose Cleaning Pads

For cleaning copper tubes and fittings. Made of nylon and will not rust. Can be used wet or dry. Leaves no residue and is long lasting.



ACP-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACP-10	All Purpose Cleaning Pads – pack of 10	PK	1

Abrasive Cloth

Aluminum oxide, high quality 120 grit, abrasive cloth to thoroughly clean copper and steel tubing. Works wet or dry. Exceeds industry standards for abrasive cloth.



SC-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SC-10	Abrasive Cloth – 1-1/2" x 10 yds.	EA	24
SC-25	Abrasive Cloth – 1-1/2" x 25 yds.	EA	12

Grip-Cut™

Open mesh sand screen cloth. Aluminum oxide grain resin bonded to synthetic nylon cloth. 100% waterproof, but can also be used dry for sanding by hand or with portable tools. Most effective where clogging is a problem, such as soft materials. 180 grit.



SCM-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SCM-5	Grip-Cut™ – 1-1/2" x 5 yds.	EA	24
SCM-10	Grip-Cut™ – 1-1/2" x 10 yds.	EA	24
SCM-25	Grip-Cut™ – 1-1/2" x 25 yds.	EA	12

AEROSOLS

Sure-Stick Heavy Duty Adhesive Spray

Wide web spray adhesive ideal for both temporary or permanent bonding. Waterproof, transparent and non-staining. Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications. Cleans with mineral spirits. Not for use on vinyl.



315-20

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
315-20	Sure-Stick Adhesive Spray – 12 oz. Aerosol	EA	12

CBC II Contact Cleaner

A plastic safe, non flammable electronic contact and circuit board cleaner. Dries fast, leaves no residue. No harsh fumes or odors.



362-16

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
362-16	CBC II Contact Cleaner – 10 oz. Aerosol	EA	12

Sweat-Free Pipe Insulation Spray

An aerosol spray on insulation specifically developed for cold water pipes, refrigeration and air conditioning lines. Stops sweating and dripping problems. Dries to a clean, white, flexible and water resistant coating. Adheres to galvanized, black iron, steel, brass, copper and PVC piping.



770-15

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
770-15	Sweat-Free Pipe Insulation – 15 oz. Aerosol	EA	12

Glass Cleaner

A foaming premium glass cleaner that powers through the toughest grease and grime on any glass or hard surface. Leaves a streak-free shine.



325-12

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
325-12	Glass Cleaner – 19 oz. Aerosol	EA	12

BATTERIES BY RAYOVAC®

Rayovac is the Industrial Product Leader! Rayovac is the leader in the industrial battery market and has been for years, with an estimated 50% share of the traditional industrial distribution channel. Rayovac introduced the top-selling industrial flashlight to the market, and set the quality standard by which all other industrial flashlights are measured today. Whether your customer is searching for a toolbox-tough flashlight or high-performance batteries, Rayovac offers a broad range of products to meet your needs.

Rayovac Industrial Maximum Alkaline Batteries – Shrink Packed

- Same battery performance as the Contractor Packs at a lower cost
- Formulated specifically to exceed the everyday demands of industrial applications
- Outstanding dependability for "must work" applications



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-ALAA	Alkaline AA Battery – Shrink Packed, pack of 8	EA	8
7-ALAAA	Alkaline AAA Battery – Shrink Packed, pack of 8	EA	8
7-ALC	Alkaline C Battery – Shrink Packed, pack of 6	EA	6
7-ALD	Alkaline D Battery – Shrink Packed, pack of 6	EA	6
7-AL9V	Alkaline 9V Battery – Shrink Packed, pack of 6	EA	6

Rayovac Lantern Batteries


- Dependable performance — for "must work" applications
- Available in General Purpose, Heavy Duty, and Alkaline Maximum



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-6VGP	6 Volt General Purpose – Spring Terminals, pack of 12	EA	12
7-6VHD	6 Volt Heavy Duty – Spring Terminals, pack of 12	EA	12
7-6VHDM	6 Volt Heavy Duty Maximum – Spring Terminals, pack of 12	EA	12
7-806	6 Volt Alkaline Maximum – Spring Terminals, pack of 6	EA	6
7-918	6 Volt General Purpose – Screw Terminals, pack of 6	EA	6
7-944	6 Volt Lantern Battery, pack of 6	EA	6

Rayovac Industrial Maximum Alkaline Batteries — Contractor Packs

- Contractor preferred, clear, re-sealable package
- Greater battery per pack quantities command higher battery sales
- Displays much more readily than other competitive batteries
- In an HVAC test market, the Contractor Packs outsold the standard packs by a greater than 2 to 1 ratio!



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-ALAA-24	Alkaline AA Battery – Contractor Pack, pack of 24	EA	24
7-ALAAA-18	Alkaline AAA Battery – Contractor Pack, pack of 18	EA	18
7-ALC-12	Alkaline C Battery – Contractor Pack, pack of 12	EA	12
7-ALD-12	Alkaline D Battery – Contractor Pack, pack of 12	EA	12
7-AL9V-8	Alkaline 9V Battery – Contractor Pack, pack of 8	EA	8

CARTON SEALING TAPE AND DISPENSER

Carton Sealing Tape

This Clear 2.4 mil Sealing Tape is 2in. nominal width and is 110 yds. in length



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-2110C	Carton Sealing Tape – 2" x 110 Yards – Clear	EA	36

Carton Tape Dispenser

A Heavy Duty Tape Dispenser that holds 2in. Tape.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-DISP	2" Carton Tape Dispenser	EA	1

CONTACT CLEANERS

HF™ Contact Cleaner

A petroleum distillate based precision cleaner with a flash point of 205°F. It can be an alternative to CFCs when applications require higher flashpoints.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-4-140	HF™ Contact Cleaner – 11 oz.	EA	12

QD® Contact Cleaner

This contact cleaner is suitable for cleaning sensitive electronics and electrical equipment and does not leave any residue. It evaporates quickly and is safe to use on all plastics. This product is more useful where lower flashpoint cleaners are acceptable. The QD® Contact Cleaner is NSF K2 Registered.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-4CF	QD® Contact Cleaner – 11 oz.	EA	12

CONTACT CLEANERS *cont'd*

Electronic Degreaser

This Advanced Technology Formula is non-chlorinated, non-conductive, non-corrosive and non-staining. It rapidly dissolves grease, oil and sludge for better efficiency of mechanical equipment. The Electronic Degreaser has no flash or fire point.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-4NU	Electronic Degreaser – 15 oz.	EA	12

DEGREASERS

Heavy Duty Degreaser

This degreaser rapidly and effectively removes grease, oil, tar, and other residue to increase operating efficiency of equipment. It has no flash or fire point, making it an excellent alternative to 1,1,1-based cleaners. Please use caution on plastics.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-7X	Heavy Duty Degreaser – 19 oz.	EA	12

Chlor-Free® Degreaser

Non-chlorinated degreasing solvent which is used to remove oil, grease and other contaminants. It is especially useful for applications requiring a quick turnaround and where a low flashpoint solvent can be used.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-7Z	Chlor-Free® Degreaser – 14 oz.	EA	12

Heavy Duty Degreaser II

The Heavy Duty Degreaser II is a non-chlorinated, zero VOC formula for cleaning where chlorinated solvents are prohibited. It has a high flashpoint of 180°F. This degreaser effectively removes soils with no residue build-up. Please exercise caution on plastics.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-7-140	Heavy Duty Degreaser II – 15 oz.	EA	12

Citrus Degreaser

The Citrus Degreaser has a new Low VOC Formula. The product removes grease, oil and lubricants with no water wash-off. It evaporates quickly and leaves no residue. The product gives off a pleasant citrus scent and is NSF C1 Registered.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-7PS	Citrus Degreaser – 15 oz.	EA	12

DROP CLOTHS

Canvas Drop Cloths

Premium grade canvas drop cloths are made of first quality and full piece 100% cotton duck canvas fabric. The industrial grade canvas fabric is durable since it is tightly woven using virgin cotton yarn. The drop cloths are washable and reusable. Double stitched seams with heavy-duty rot resistant thread.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DC-4128	Canvas Drop Cloth - 4' x 12'	EA	1
DC-9128	Canvas Drop Cloth - 9' x 12'	EA	1

HAND CLEANERS

Fast Orange® Hand Cleaner

Three out of five people prefer Fast Orange® over other hand cleaners. The first biodegradable, waterless hand cleaner with aloe, lanolin, and jojoba. Smooth lotion and extra-fine pumice available. USDA Approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HCO-7	Fast Orange® – 7-1/2 fl. oz. Smooth Squeeze Bottle	EA	12
HCO-15	Fast Orange® – 15 oz. Smooth Squeeze Bottle	EA	6
HCO-128	Fast Orange® – 1 Gallon Smooth with Dispenser	EA	4
HCP-7	Fast Orange® – 7-1/2 fl. oz. Pumice Squeeze Bottle	EA	12
HCP-15	Fast Orange® – 15 oz. Pumice Squeeze Bottle	EA	12

Kimberly-Clark Waterless Hand Wipes

These wipes go wherever hands go to get dirty. Full sized 12" x 12" wipes for full sized cleaning. Natural cleaning agent is tough on grease, grime, ink, and paint. Dual textured – smooth for wiping on one side and tough for scrubbing on the other. More wipes with our 75 count bucket.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-42272	Kimberly-Clark Waterless Hand Wipes – Bucket	EA	1
5-91054	Kimberly-Clark Waterless Hand Wipes – Singles	EA	100

INDUSTRIAL TOWELS

WypAll Plus

Absorbs grease, oil, water and solvents from floors, hands, parts, tools and machinery. Tough enough for extra heavy jobs. Comes in a convenient pop-up box of 100 towels.



5-05790

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-05790	WypAll Plus Towels—White, pack of 100	PK	1

Teri® Towels

The Teri® reinforced towels feature multi-ply tissue reinforced with nylon webbing for added strength on the job. Made from 100% recycled paper. Towel size is 9-3/4" x 16-3/4". Towel color is white. Comes in a convenient pop up box. 126 towels/box. 10 boxes/case.



5-34790

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-34790	Teri Reinforced Towels, pack of 126	PK	1

Workhorse® Manufactured Rags

The economical alternative to scrap rags. Workhorse® Manufactured Rags is the first product to be made from Kimberly-Clark's advanced new material – Hydrokni®. Durable, rag tough construction stands up to any task. Can be re-used time and time again. Available in white or blue.



5-41455

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-41455	9-3/4" x 16-3/4" White, pack of 100	PK	1
5-41411	9-3/4" x 16-3/4" Blue, pack of 100	PK	1

Shop Towels

Heavy duty reusable towels. For wipe ups of grease, oil, water, etc. 100% cotton material is pre-shrunk and hemmed. Each towel measures 13" x 16".



ST-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ST-4	Shop Towels, pack of 4	PK	1
ST-10	Shop Towels, pack of 10	PK	1
ST-24	Shop Towels, pack of 24	PK	1

Kimtex® Towels

Long lasting Kimtex® stands up to oils, chemicals and solvents better than ordinary shop towels. Cloth-like feel and performance. Towel size is 9-3/4" x 16-3/4". 100 towels/box. 5 boxes/case.



5-33570

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-33570	Kimtex Shop Towels, pack of 100	PK	1

WypAll ShopPro X80 Towels

Like a rental shop towel, only more consistent. Engineered to feel like cloth and work even better. Absorbs more oil and water faster pound for pound than laundered shop towels. The ShopPro X80 is simply the heaviest duty towel in the Kimberly Clark line. 160 towels/box.



5-41041

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-41041	WypAll ShopPro X80 Towels, pack of 160	PK	1
5-41043	WypAll ShopPro X80 Towels, roll of 465	PK	1

Terry Towels

100% cotton. Minimum of 14" x 17". Pre-washed for absorbency, fully-hemmed, all-white, and reusable.



DTT-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DTT-10	Terry Towels, pack of 10	PK	1
DTT-24	Terry Towels, pack of 24	PK	1

LUBRICANTS

Knock'er Loose® Penetrating Solvent

An industrial strength, low viscosity penetrant designed to rapidly loosen and free seized, bound or frozen fasteners. This product also quickly permeates rust, scale, gum, grease and corrosion. Independent tests reveal that it outperforms its competition.



CRC-1KB

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-1KB	Knock'er Loose® Penetrating Solvent – 13 oz.	EA	12

Screwloose® Industrial Penetrating Oil

A no compromise penetrant that attacks corrosion to free corroded fasteners and mechanical components. A super fast, powerful, concentrated penetrating solvent that loosens rust scale and corrosion and instantly penetrates minute and tightly fitted crevices.



CRC-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-8	Screwloose® Industrial Penetrating Oil – 11 oz.	EA	12

LUBRICANTS cont'd

White Lithium Grease

White Lithium Grease has superior lubrication and durability in any weather or temperature. It is useful as a break in lubricant for bearings or as a general purpose lubricant and corrosion inhibitor for tools, machinery and equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-9	White Lithium Grease – 10 oz.	EA	12

3-36® Multi-Purpose Lubricant & Corrosion Inhibitor

A multi-purpose petroleum based compound that forms a clear, thin film that lubricates and protects against wear and corrosion. The product also displaces moisture and cleans.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-2	3-36® Multi-Purpose Lubricant & Corrosion Inhibitor – 11 oz.	EA	12

Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating

High-performance zinc coating that electrochemically bonds with ferrous metals to form a galvanic cell. The product also fights rust and corrosion and can be used as a touch-up for damaged galvanized coatings. Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating dries quickly.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-5	Zinc-It® Instant Cold Galvanize™ Zinc Rich Galvanize Coating – 13 oz.	EA	12

WD-40®

Loosens rusted parts. Stops squeaks. Removes tar, grease and adhesives. Displaces moisture. Protects metal. New Smart Straw can.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
741-001	WD-40 – 8 oz.	EA	12
741-002	WD-40 – 11 oz.	EA	12

Cutting Oil


Cutting Oil is a superior thread cutting lubricant for use on all types of metals, including brass, copper and aluminum. For use on ferrous and non-ferrous metals. Clings to vertical surfaces for improved performance.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-CF2	Cutting Oil - 16 oz. aerosol	EA	12

Ultra Lite 3-36® Ultra Thin Non Staining Lubricant


Ultra thin, non staining lubricant that resists oil, dirt and dust build up. This lubricant also seals out moisture and protects against corrosion. It is excellent for drying out electrical components.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-1	Ultra Lite 3-36® Ultra Thin Non Staining Lubricant – 11 oz.	EA	12

SP-400™ Corrosion Inhibitor

Long-term corrosion inhibitor that protects equipment subject to heat, humidity, chemicals or severely corrosive atmospheres. This product is best to use on machined surfaces and assemblies subjected to long periods of storage.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-3	SP-400™ Corrosion Inhibitor – 10 oz.	EA	12

Sta-Plex™ Extreme Pressure Premium Red Grease

A superior multi-purpose certified lithium complex based grease which contains extreme pressure, anti-wear, and anti-oxidation additives. The product is very useful in high temperature and performance applications. The drop point is 500°F.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-13	Sta-Plex™ Extreme Pressure Premium Red Grease – 14 oz.	EA	12

Heavy Duty Silicone Mold Release

This product provides maximum releases and is useful in difficult to remove parts. The Heavy Duty Silicone Mold Release is colorless, odorless, non-staining and non-corrosive.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CRC-6	Heavy Duty Silicone Mold Release – 12 oz.	EA	12

Pull-A-Spout Oiler

All purpose oiler with a 14in. telescoping spout. Zooms out for long shots, and in for short shots, even zooms around corners. Squeeze bottle action. Perfect lubricant for general industrial use. Contains four ounces of finest quality carbon free, rust and oxidation inhibited lubricating oil. Plastic container won't short out around electrical connections. No leakage.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CO-1	Pull-A-Spout Oiler – 4 oz. – (Display)	EA	12

MARKERS

Valve Action Marker

Large ink supply for increased mileage. Fast drying, smear and water resistant. Utilizes a patented valve-activated ink feed mechanism to supply ink as required, down to the last drop.



540-800

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-799	Valve Action Marker-Regular Tip – Red	EA	12
540-800	Valve Action Marker-Regular Tip – Black	EA	12

Felt Tip Markers

Sharpie® King-Sized Permanent Marker for metal, glass, paper and plastic. Durable metal body.



540-811B

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-811B	Sharpie® King-Sized Marker	EA	12

Valve Action Paint Marker

Bright, crisp, opaque colors. The oil-based paint is quick drying and permanent on most surfaces. These markers also feature the patented valve-operated feed mechanism and a medium point.



540-808

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-805	Valve Action Paint Marker – Black	EA	12
540-806	Valve Action Paint Marker – Red	EA	12
540-807	Valve Action Paint Marker – White	EA	12
540-808	Valve Action Paint Marker – Yellow	EA	12

PAINTS AND PRIMERS

General Purpose Spray Paint

New, more complete line of professional quality fast drying spray paints. Color code compressors or refrigerant recovery cylinders to match standard refrigerant identifying colors. Touch up equipment housings. Product meets most recent VOC legislation and is currently compliant.



799-001

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
799-001	Spray Paint – Gloss Black – 12 oz.	EA	6
799-002	Spray Paint – Flat Black – 12 oz.	EA	6
799-003	Spray Paint – Gloss White – 12 oz.	EA	6
799-004	Spray Paint – Flat White – 12 oz.	EA	6
799-005	Spray Paint – Dark Machinery Gray – 12 oz.	EA	6
799-006	Spray Paint – Gray Primer – 12 oz.	EA	6
799-008	Spray Paint – Bright Yellow – 12 oz.	EA	6
799-009	Spray Paint – Astro Blue – 12 oz.	EA	6
799-010	Spray Paint – Orange – 12 oz.	EA	6
799-011	Spray Paint – Aluminum (Silver) – 12 oz.	EA	6
799-012	Spray Paint – Zinc Rich Primer – 14 oz.	EA	6
799-013	Spray Paint – Bright Red – 12 oz.	EA	6

Industrial Enamel

Finally an aerosol paint that sprays in any direction without clogging. We guarantee it! Dries tack free in 10 to 20 minutes; fully dry in just one hour. Excellent corrosion and solvent resistance. Resists heat up to 250°F. Now in 20 oz. cans. Product meets most recent VOC legislation and is currently compliant.



799-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
799-020	Industrial Enamel – Gloss Black – 12 oz.	EA	6
799-021	Industrial Enamel – Flat Black – 12 oz.	EA	6
799-022	Industrial Enamel – Gloss White – 12 oz.	EA	6
799-024	Industrial Enamel – Machinery Light Gray – 12 oz.	EA	6
799-025	Industrial Enamel – Aluminum – 12 oz.	EA	6

High Heat Spray Paint

An ultra high temperature coating formulated to resist temperatures up to 1300°F. Great for use on boilers, furnaces, steam pipes, chimney collars, compressors and engine manifolds. Product meets most recent VOC legislation and is currently compliant.



799-041

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
799-040	High Heat Spray Paint – Aluminum – 12 oz.	EA	6
799-041	High Heat Spray Paint – Black – 12 oz.	EA	6

SAFETY SUPPLIES, DEVICES

Latex Gloves

Disposable natural latex rubber which provide a natural feel and grip. Powdered.



23010

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
23010	Latex Gloves, pack of 50 pairs	PK	1

Nitrile Gloves

Foam control gloves for industrial use that provide a high level of wet and dry grip. Standard in applications where tactile sensitivity is required.



540-1005L

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-1005L	Nitrile Gloves - Large, 1 pair per pack	EA	1

Heavy Duty Work Gloves

Your choice of durable work gloves. Washable, breathable, and durable for everyday use.




540-HU1L

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-HU1M	Heavy Utility Gloves - Medium, 1 pair per pack	EA	1
540-HU1L	Heavy Utility Gloves - Large, 1 pair per pack	EA	1
540-BH1M	Box Handler Gloves - Medium, 1 pair per pack	EA	1
540-BH1L	Box Handler Gloves - Large, 1 pair per pack	EA	1
540-LG1M	Leather Gloves - Medium, 1 pair per pack	EA	1

Dust Masks

Extremely lightweight, disposable, nuisance dust mask for non-toxic particles. Metal noseclips to fit individual facial contours.




5-500

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-500	Dust Masks, pack of 50	PK	1

Leather Work Gloves

Versatile leather work gloves ideal for many industrial jobs. These leather work gloves offer: wing thumb pattern, continuous pull patch, seamless full leather index finger, leather knuckle strap, leather finger tips with elastic gather on back. Generously sized for a good working fit.



540-2114

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-2114	Leather Glove w/Safety Cuff, 1 pair per pack	EA	1
540-2144	Leather Glove, 1 pair per pack	EA	1
540-2200	Renegade® Performance Glove w/Kevlar Thread, 1 pair per pack	EA	1

First Aid Kits

10 and 25-unit first aid kits packaged in economy plastic boxes to assist when industrial accidents occur.



FAK-25

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FAK-10	10-Unit First Aid Kit	EA	1
FAK-25	25-Unit First Aid Kit	EA	1

Shoe Covers

Slip these shoe covers on in seconds to protect carpet, tile, or wood from dirt and scuff marks. Customers will appreciate your professional appearance.



SC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SC-1	Dark Blue Shoe Covers, pack of 50 pairs	PK	1
SC-1WP	Waterproof Show Covers, pack of 50 pairs	PK	1

SEALANT, EPOXY, GLUE

Thread Sealant with PTFE

General purpose sealant with the lubricity of PTFE for metal pipes. Won't shred like PTFE Tape. Allows easy disassembly. Resists common shop fluids. 60° to 400°F temp. resistance. Pressure resistance of 5000 PSI.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-80632	Thread Sealant – 1/4 Pint Brush Can	EA	12
7-80633	Thread Sealant – 1 Pint Brush Can., 12 per pack	EA	12

Super Glue


This adhesive can be used on dirty, greasy surfaces and the medium viscosity penetrates into preassembled and close fitting parts. It can be used on aluminum, metal, rubber, and most plastics for most tough jobs.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DEP052	Super Glue – 2 Gram Tube	EA	12

J-B Weld

The world's finest cold-weld compound for use when welding or soldering is out of the question due to cost, down time for repairs, or technical or environmental considerations. A remarkably easy, convenient, and inexpensive alternative to welding, soldering, and brazing. Literally pennies per use.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
JB8265	J-B Weld 2 Part Epoxy	EA	1

Wagner Adhesive Sealant

For refrigerant sealing. Eliminates fastener loosening, leakage, and corrosion. Cures between thread flanks to seal against leakage and prevents thread corrosion. Offers sealing with maximum solvent resistance to the action of refrigerant (11, 12 and 22), ammonia and sulfur dioxide. Withstands corrosive liquids used in metal finishings and process industries. Ideal sealant for refrigeration, A/C, and process equipment using corrosive chemicals.

CAS-2712



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CAS-2712	Wagner Adhesive Sealant – 0.34 fl. oz.	EA	10

Fast Cure Epoxy

An easy-to-use, two part putty you simply mix and mold like clay. No complicated weighing or measuring required. Easy 1:1 cut-what-you-need mix ratio. Form it into any shape. It hardens in one hour and makes a final, steel-hard cure in 12 hours and can be sanded, drilled, machined, sawed and painted. Use on metal, wood, brick, stone, concrete, fiberglass, porcelain, tile and most plastics. Cures under water. 1.0 lb.

DEP8001




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DEP8001	Gray Epoxy Putty – 1 lb. Kit	EA	24
DEP8002	White Epoxy Putty – 1 lb. Kit	EA	24

SEALING COMPOUNDS, ADHESIVE

Foam Sealant – One Component

One component closed-cell expanding polyurethane foam sealant for lineal caulking applications. Air-moisture cure. Tack free in 20 minutes; fully cured in 12 hours. Paintable. Use for insulating and sealing around windows, doors, pipes, ducts and vents. Non-toxic when cured. Paint to protect from UV exposure. "R" value 4.7 (1" thickness). Foam contains fire retarding chemical and is U.L. Listed but not rated as a firestop product. Environmental concerns have led us to replace CFC's and HCFC's with hydrocarbon material in our one component foam products. See instructions on each product to ensure safe use and quality results.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
01714	Foam Sealant – 12 oz. Can – Yields 275' (3/8" bead)	EA	12
01724	Foam Sealant – 20 oz. Can – Yields 460' (3/8" bead)	EA	12

Foam Sealant – Two Component

Two component closed-cell expanding polyurethane foam sealant for cavity filling, surface coating and insulation applications. Rapid chemical cure (Component A and Component B). Tack free in 2 minutes, fully cured in 20 minutes. Use for insulation repairs in refrigerated enclosures. Spray coat and insulate tanks, pipes, tubs and panels. Non-toxic when cured. Paint to protect from UV exposure. "R" value 5 (1" thickness). Kits include dispensing nozzles, hose and flow control mechanism. Foam contains fire retarding chemicals and is U.L. Listed but is not rated as a firestop product.

10012



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
10012	Foam – 2 Kit – 15 bd. ft. Kit – Yields 1 cu. ft.	EA	12
10180	Foam – 2 Kit – 200 bd. ft. Kit – Yields 15 cu. ft.	EA	1
10600	Foam – 2 Kit – 600 bd. ft. Kit – Yields 50 cu. ft.	EA	1

SEALING COMPOUNDS, ADHESIVE cont'd

Geocel Caulking Sealant

Exceptional bonding and sealing caulk for interior and exterior applications involving seams, joints, ductwork, flashing and any similar use. Excellent adhesion to virtually any surface (metals, fiberglass, wood, concrete, brick and most plastics) even if moisture is present. Resealable, paintable, flexible. Will not crack, chip or peel. Specially formulated for the HVACR industry. Not available in California.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
18001	Clear Geocel Sealant – 10.3 oz. Cartridge	EA	24
18002	White Geocel Sealant – 10.3 oz. Cartridge	EA	24
18003	Aluminum/Gray Geocel Sealant – 10.3 oz. Cartridge	EA	24

DiversiGum Sealing Compound

Non-hardening. For plugging openings through foundations or around refrigeration tube entry.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-202-1	DiversiGum Sealing Compound – 1 lb. Slug	EA	24
6-202-2	DiversiGum Sealing Compound – 2 lb. Slug	EA	20
AG-25	DiversiGum Sealing Compound – 3/8" x 25' Caulking Cord	EA	12

Silicone Sealant

Food grade 100% RTV Silicone Sealant. Can be used in applications for continuous use to 450°F. UV and water resistant. Long-term flexibility. Non-paintable. Available in 10.3 fl. oz. tube for use in standard caulk gun or in 3 fl. oz. squeeze tube.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-4000	Clear Silicone Sealant – 10.3 fl. oz. Tube	EA	12
7-4001	Clear Silicone Sealant – 3 fl. oz. Squeeze Tube	EA	48
7-4100	White Silicone Sealant – 10.3 fl. oz. Tube	EA	12
7-4101	White Silicone Sealant – 3 fl. oz. Squeeze Tube	EA	48
7-4200	Aluminum Silicone Sealant – 10.3 fl. oz. Tube	EA	12

25 Year Acrylic Latex Painter's Caulk

For both interior and exterior use. DiversiTech's 25 Year Acrylic Latex Painter's Caulk forms a tough, paintable resilient bond to all building material surfaces. Excellent resistance to water, weathering and moisture vapor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-4500	White Acrylic Latex Caulk – 10.1 oz. Cartridge	EA	12
7-4400	Clear Acrylic Latex Caulk – 10.1 oz. Cartridge	EA	12

Firestop Products for Class A Buildings

U.L. Classified. Code Approved. Seal penetrations of plumbing, refrigeration and AC lines, ducts, vents and electrical cable through fire-rated floors, walls and ceilings. Easy-to-use, non-shrinking, non-toxic and permanently flexible. Blocks fire, gas, smoke, air and water migration. Use ceramic fiber filler together with putty or caulk for thick penetrations. Technical bulletins available.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
16491	Firestop Caulk – Red – 10.3 fl. oz. cartridge	EA	12

Caulk Gun

Caulk guns can be used to hold the sealant to seal duct work.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-100	Caulk Gun – Super Ratchet Type	EA	12
7-200	Caulk Gun – Standard Duty	EA	1

High Temp Red Silicone Sealant

A one part non-slumping paste that cures to a tough, rubbery solid at room temperature. Formulated to perform at temperatures ranging from -85°F to 500°F for continuous operation, and to 600°F for intermittent exposure. Tack free cure time – 15 minutes. Full cure time – 24 hours.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-4300	High Temp Red Silicone Sealant – 10.1 oz. Cartridge	EA	12

Pro-Air Duct Sealant – UL 181 AM-BM Listed

Water-based fiber-reinforced duct sealant/mastic formulated for indoor/outdoor use. Meets U.L. Class 1 rating and local codes while featuring long term flexibility and strength. Use on metal heating, ventilating, and A/C duct systems; as well as fiberglass duct board systems and flex duct systems. Recommended for use to 10" of water column pressure without the need for fiberglass mesh reinforcement.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
800-008	Pro-Air Duct Sealant – 1/10 Gallon Tube – 10.5 oz.	EA	12
800-009	Pro-Air Duct Sealant – 1 Gallon Pail	EA	4

SEALING COMPOUNDS, ADHESIVE cont'd

Pro-Air Industrial Grade Spray Adhesive

A clear, pressure sensitive aerosol adhesive with exceptional tack and shear strength characteristics. An excellent choice for most permanent adhesive applications: duct liner and wrap, sheet aluminum, fiberglass insulation board, and much more. The aerosol package offers a specially designed web spray pattern for even, controlled distribution. Flammability meets aerosol flame extension test requirements. Coverage is approximately 90-100 square feet per pound.

GP1-40BL



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GP1-40BL	Pro-Air Spray Adhesive – 38 lb. Disposable Cylinder	EA	1
GN-23H	Spray Gun	EA	1
SH-06	6' Spray Hose	EA	1
SH-12	12' Spray Hose	EA	1

Black Jack® Roof Cement

Black Jack® All-Weather Roof Cement is an asphalt based patching compound designed to repair cracks, splits, seams and holes in roofing materials. It also works great in new construction and in setting flashings, drip edges and roofing material edges.

- Use in wet or dry conditions
- Seals flashings, and other roof projections
- Fiber reinforced
- Thick trowel grade

RM-1G



RM-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RM-1G	Black Jack All Weather Roof Cement – 1 gallon	EA	6
RM-10	Black Jack All Weather Roof Cement – 10 oz. tube	EA	12

SHEET METAL SCREWS

Sheet Metal Screw Assortment Kit

The 7 most popular sizes in one multi-compartmented, resealable, plastic container. Perfect for the toolbox. Contains:

- 7 x 1/2 Taper Point – 175 pieces
- 8 x 1/2 Drill Point – 100 pieces
- 8 x 1 Taper Point – 50 pieces
- 8 x 2 Taper Point – 40 pieces
- 8 x 1/2 Taper Point – 175 pieces
- 8 x 3/4 Taper Point – 60 pieces
- 8 x 1-1/2 Taper Point – 50 pieces
- 1/4" Nut Setter – 1 each

5-SCR-AK



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-SCR-AK	Sheet Metal Screw Assortment Pack	EA	1

Masonry Screw

This product comes in a pack of 250 and is suitable for brick, tile, slate, cement, and cinder block. The screws are a nice addition to the toolbox.



5-SCRMS

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-SCRMS	Masonry Screw – 1/4" x 1-1/4", pack of 250	PK	1

Masonry Bit

This bit is suitable for brick, tile, slate, cement, and cinder block. This bit is a nice addition to the toolbox.



540-DB6

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-DB6	Masonry Bit – 3/16" x 6"	EA	1

Anchor Kit

Plastic anchor kit for sheet rock applications. Kit includes 100 anchors, screws and 1 masonry bit.



540-AK100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-AK100	Anchor size 1/4 x 1, Screw Size 10 x 1-1/4 HWH Head Size 5/16 hex	EA	1

SHEET METAL SCREWS cont'd

Sheet Metal Screws – Taper Point

Hex washer slotted head. Burr-free. Full 1/4" head will not strip out of hex driver opening. Heat treated tapered point will not break or "walk". Packaged in resealable plastic cartons.

5-SCR63-8



5-SCR81-2BULK



5-SCR101

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-SCR63-8	6 x 3/8 Taper Point, pack of 1,000	PK	1
5-SCR63-8BULK	6 x 3/8 Taper Point – Bulk, pack of 20,000	PK	1
5-SCR71-2	7 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR71-2BULK	7 x 1/2 Taper Point – Bulk, pack of 15,000	PK	1
5-SCR81-2	8 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR81-25M	8 x 1/2 Taper Point, pack of 5,000	PK	1
5-SCR81-2BULK	8 x 1/2 Taper Point – Bulk, pack of 12,000	PK	1
5-SCR83-4	8 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR83-4BULK	8 x 3/4 Taper Point – Bulk, pack of 10,000	PK	1
5-SCR81	8 x 1 Taper Point, pack of 500	PK	1
5-SCR81BULK	8 x 1 Taper Point – Bulk, pack of 7,500	PK	1
5-SCR81-12-100	8 x 1-1/2 Taper Point, pack of 100	PK	1
5-SCR81-12	8 x 1-1/2 Taper Point, pack of 250	PK	1
5-SCR81-12W	8 x 1-1/2 Taper Point w/White Head, pack of 250	PK	1
5-SCR81-12WTBUL	8 x 1-1/2 Taper Point w/White Head – Bulk, pack of 5,000	PK	1
5-SCR81-12BULK	8 x 1-1/2 Taper Point – Bulk, pack of 5,000	PK	1
5-SCR82-100	8 x 2 Taper Point, pack of 100	PK	1
5-SCR82	8 x 2 Taper Point, pack of 350	PK	1
5-SCR82W	8 x 2 Taper Point w/White Head, pack of 250	PK	1
5-SCR82BULK	8 x 2 Taper Point – Bulk, pack of 3,000	PK	1
5-SCR101-2	10 x 1/2 Taper Point, pack of 1,000	PK	1
5-SCR101-2BULK	10 x 1/2 Taper Point – Bulk, pack of 14,000	PK	1
5-SCR103-4	10 x 3/4 Taper Point, pack of 1,000	PK	1
5-SCR103-4BULK	10 x 3/4 Taper Point – Bulk, pack of 10,000	PK	1
5-SCR101	10 x 1 Taper Point, pack of 500	PK	1
5-SCR101BULK	10 x 1 Taper Point – Bulk, pack of 7,000	PK	1


Sheet Metal Screws – Drill Point

Self-drilling, self-tapping. Hex washer head. Produces the optimum hole size, resulting in a tighter fit. Made from special heat treated steel for extra strength. Packaged in resealable plastic cartons.

5-SCR61-2DP



5-SCR81-2DPBULK



5-SCR82DP

CATALOG NO.	DESCRIPTION	HEAD SIZE	UOM	ORDER MULTIPLE
5-SCR61-2DP	6 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR61-2DPBULK	6 x 1/2 Drill Point – Bulk, pack of 15,000	1/4"	PK	1
5-SCR81-2DP	8 x 1/2 Drill Point, pack of 1,000	1/4"	PK	1
5-SCR81-2DPBULK	8 x 1/2 Drill Point – Bulk, pack of 10,000	1/4"	PK	1
5-SCR83-4DP	8 x 3/4 Drill Point, pack of 500	1/4"	PK	1
5-SCR83-4DPBULK	8 x 3/4 Drill Point – Bulk, pack of 10,000	1/4"	PK	1
5-SCR81DP	8 x 1 Drill Point, pack of 500	1/4"	PK	1
5-SCR81DPBULK	8 x 1 Drill Point – Bulk, pack of 7,500	1/4"	PK	1
5-SCR81-12DP	8 x 1-1/2 Drill Point, pack of 500	1/4"	PK	1
5-SCR81-12DPBULK	8 x 1-1/2 Drill Point – Bulk, pack of 5,000	1/4"	PK	1
5-SCR82DP	8 x 2 Drill Point, pack of 350	1/4"	PK	1
5-SCR82DPBULK	8 x 2 Drill Point – Bulk, pack of 2,500	1/4"	PK	1
5-SCR101-2DP	10 x 1/2 Drill Point, pack of 500	5/16"	PK	1
5-SCR101-2DPBULK	10 x 1/2 Drill Point – Bulk, pack of 10,000	5/16"	PK	1
5-SCR103-4DP	10 x 3/4 Drill Point, pack of 500	5/16"	PK	1
5-SCR103-4DPBULK	10 x 3/4 Drill Point – Bulk, pack of 5,000	5/16"	PK	1
5-SCR101DP	10 x 1 Drill Point, pack of 500	5/16"	PK	1
5-SCR101DPBULK	10 x 1 Drill Point – Bulk, pack of 5,000	5/16"	PK	1
5-SCR101-12DP	10 x 1-1/2 Drill Point, pack of 250	5/16"	PK	1
5-SCR101-12DPBULK	10 x 1-1/2 Drill Point – Bulk, pack of 3,500	5/16"	PK	1
5-SCR102DP	10 x 2 Drill Point, pack of 350	5/16"	PK	1
5-SCR102DPBULK	10 x 2 Drill Point – Bulk, pack of 2,500	5/16"	PK	1

WASP, HORNET, AND YELLOW JACKET KILLERS

Sting Less Wasp & Hornet Killer

Kills wasps, hornets and yellow jackets. Very fast-acting when insects are hit directly. Allow approximately 24 hours for those that were not directly hit. This container delivers a 20-foot jet blast to knock down the insects and allow for the user to remain at a safe distance.

436-20



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
436-20	Sting Less Wasp & Hornet Spray – 14 oz. Aerosol	EA	12

Wasp & Hornet Killer by ENFORCER

Enforcer's Wasp & Hornet Killer shoots a 20-foot jet blast for instant knockdown of wasps, hornets, and yellow jackets. Enforcer's Wasp & Yellow Jacket Foam is a 20-foot blast of blanketing foam that plugs yellow jacket holes and clings to wasp and hornet nests, preventing their escape.


8-WH16



8-FWH16

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
8-WH16	Enforcer Wasp & Hornet Killer – 16 oz. Aerosol	EA	12
8-FWH16	Enforcer Wasp & Yellow Jacket Foam – 16 oz. Aerosol	EA	12

Anchors.....	102-103
Boxes, Rings, and Covers.....	104-105
Bulbs	105
Cable Connectors	106
Cable Ties and Accessories	107
Conduit Fittings	108
General Tools.....	109
High Temperature Solderless Terminals	100
Nuts and Bolts.....	109-110
Plastic Anchor Kits	103
Power Cords and Work Lights	111
Screws	111
Slip-On Solderless Terminals	96-97
Special Purpose Solderless Terminals	97-98
Specialty Fasteners.....	112-113
Specialty Fittings	113
Standard Solderless Terminals.....	98-99
Storage Containers	113-114
Tapes	114
Terminal Kits	101
Testers, Leads, Clips	114-115
Waterproof Solderless Terminals.....	100
Wire.....	115-116
Wiring Devices	116-121

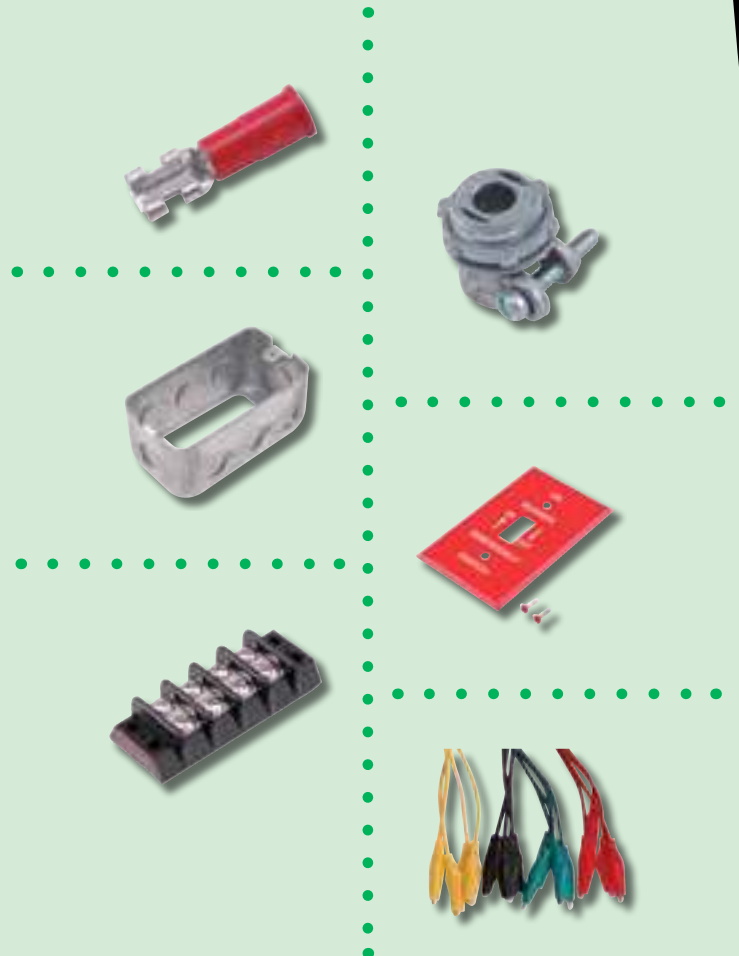

How to sell DEVCO products

DEVCO merchandising displays are an easy and attractive way to showcase a variety of DEVCO products in your store. Offered in three different versions, each display rack includes everything you need to create extra sales for your business.

Easy to Display

DEVCO provides turnkey merchandising solutions for wholesale distribution. Attractive, easy to set-up merchandising displays provide a great way to highlight DEVCO products and make it easy for customers to find what they need. The point of sale display merchandises the products, enabling the distributor to add additional sales.

The products merchandised on the carousel are impulse buy items. The items are packed so they cost the contractor only a few dollars, and most are less than \$10 each.

Easy to Profit

DEVCO displays provide a typical distributor branch with easy add-on sales that build profits. Each display can generate significant sales and margins for the store while providing contractors with the parts they need to finish the job. These self-service displays are a great way to increase revenue with minimal effort.

The Perfect Plan



Each DEVCO Merchandising display comes with a complete plan-o-gram to make merchandising it simple and fast. And there are three different versions available so you can choose the display that's right for your business and customers.

And when you purchase the DEVCO products to fill it up, the merchandising rack is **loaned free of charge.**






Display Rack	Featured Products
EZC	Solderless terminals, ground connectors, fasteners, anchor kits, cable ties, washers, hex nuts, cable clamps, sheet metal screws and hose clamps
Electrical	Ground adaptors, outlets, boxes, bushings, cable connectors, extension rings, indicator lights, plugs and connectors, receptacles, reducing washers, toggle switches and hook up wire
Combo	Solderless terminals, insulated rings, ground adaptors, covers, reducing washers, plugs and connectors, hook up wire, fasteners, hex nuts and self drilling screws

PLAN-O-GRAM FOR DEVCO ELEC RACK (MKT-POP-DEVELEC)

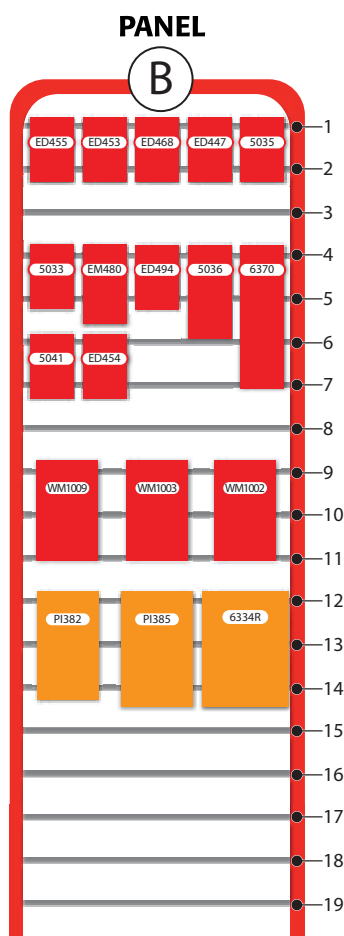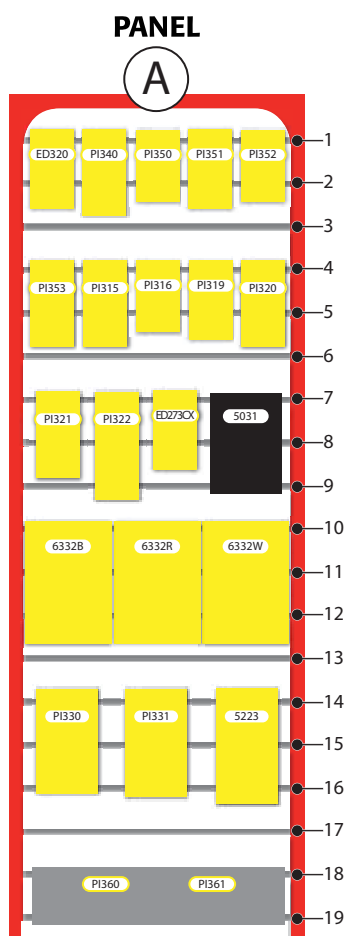

MKT-POP-DEVELEC

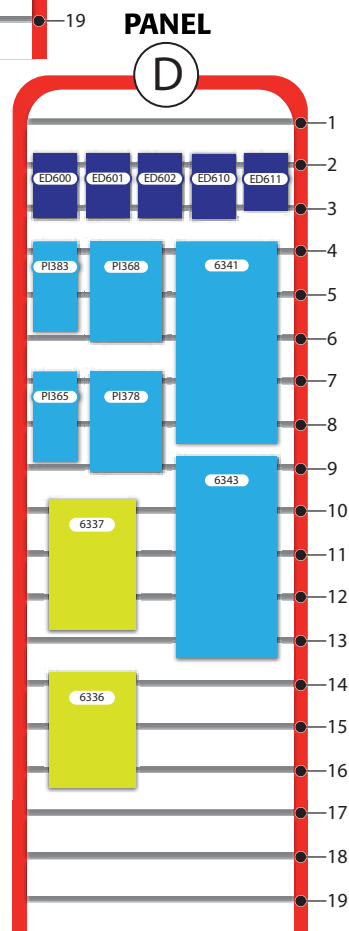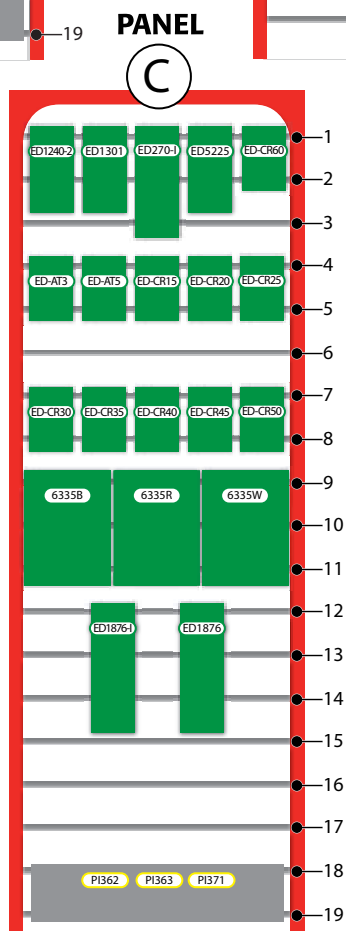

MKT-POP-DEVELEC
Merchandising Rack
72" x 22" x 20.5"



PLAN-O-GRAM FOR DEVCO EZC RACK (MKT-POP-DEVEZC)


PANEL

A

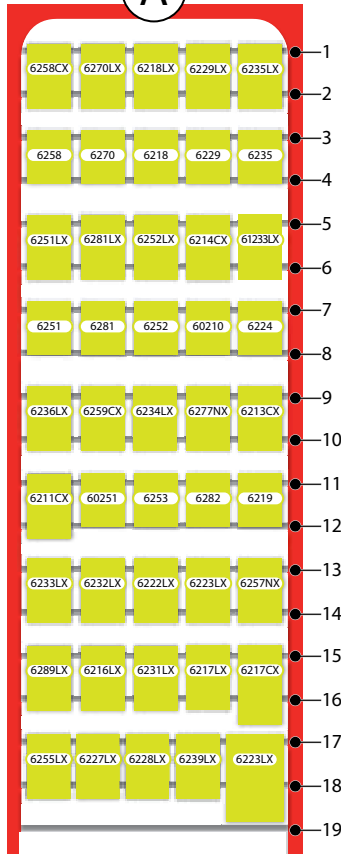


PANEL

B

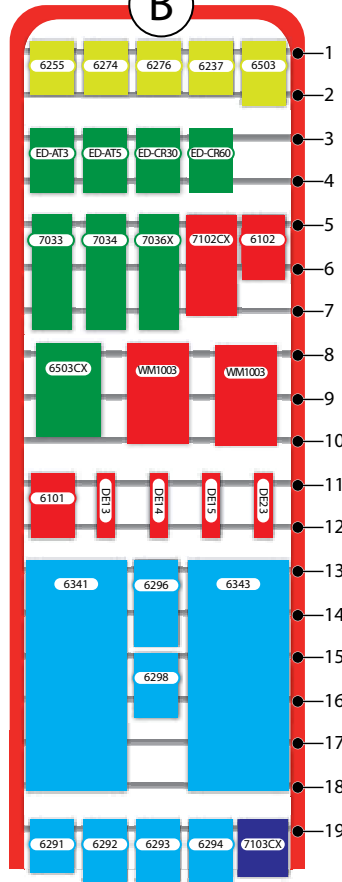


PANEL

C

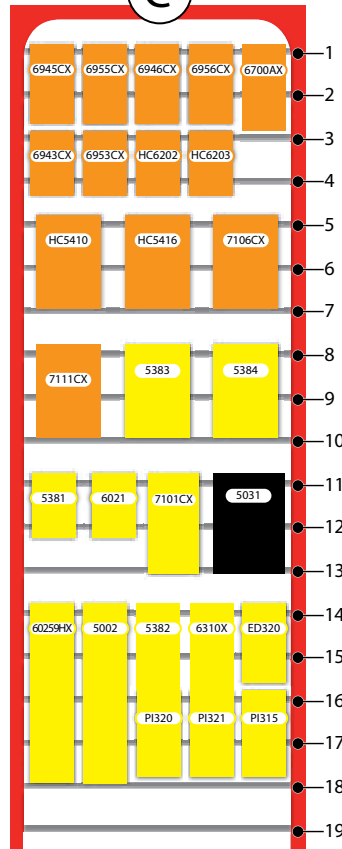


PANEL

D


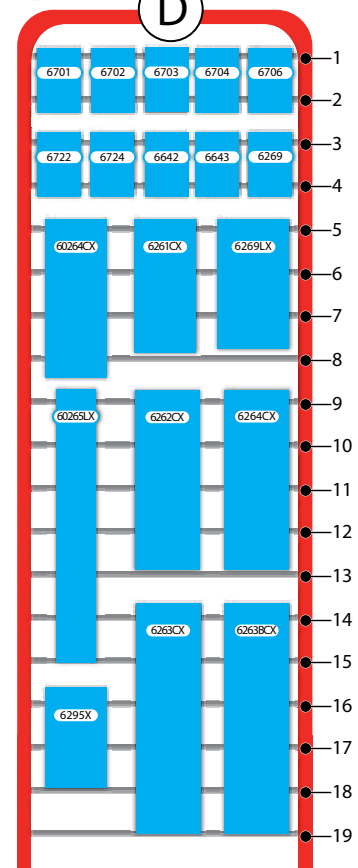


MKT-POP-DEVEZC





MKT-POP-DEVEZC
Merchandising Rack
72" x 22" x 20.5"

PLAN-O-GRAM FOR DEVCO COMBO RACK (MKT-POP-DEVCOMBO)

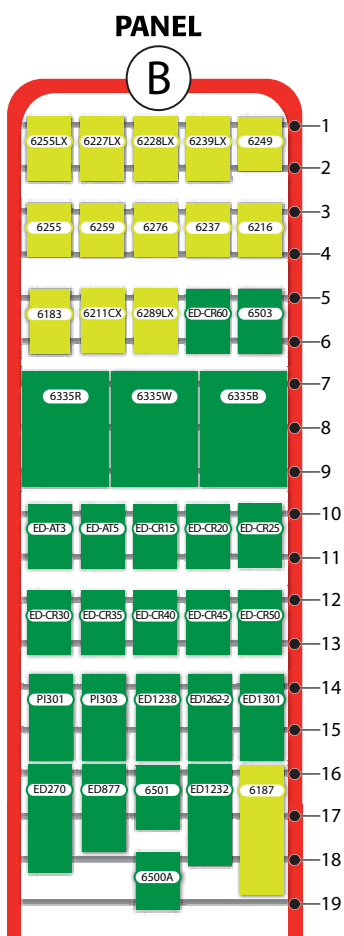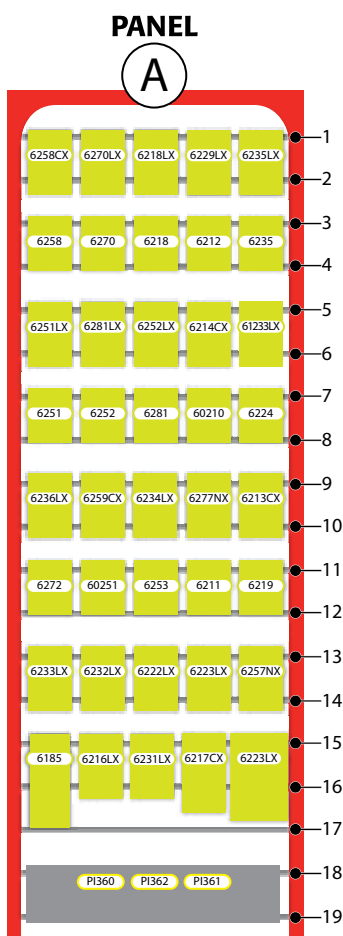

MKT-POP-DEVCOMBO

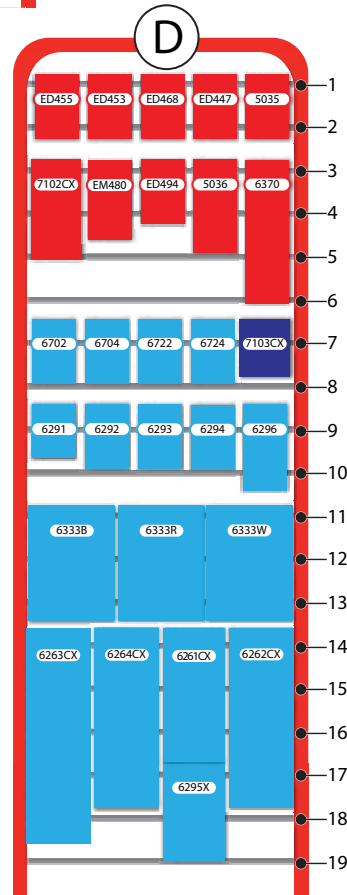
MKT-POP-DEVCOMBO
Merchandising Rack
72" x 22" x 20.5"



DEVCO RACKS MASTER ITEM LIST (BY RACK)

This DEVCO product list includes any DEVCO item that is part of the plan-o-gram display for either the EZC, ELEC or COMBO versions of the DEVCO rack. This cross reference indicates on which display rack each item should be placed.

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
5002	Crimp Tool w/ Cutter & Stripper Ins.		X	X
5031	Test Leads (ins. Alligator clips) Low Voltage 22in 8pcs	X	X	
5033	Alligator Clips (steel) 2in long for probes .075in-.08in	X		
5035	Alligator Clips (copper) B&R Ins 2in long	X		X
5036	Test Clip (steel 20A) B&R Insulators 2-7/16in long	X		X
5041	Test Leads Low Voltage Hook Ty22ga 36in red & black	X		
5223	Triple Outlet 2 Pole 3 Wire 15A-125V Polarized plastic	X		
5381	Nylon Cable Clamp 1/8in I.D.		X	
5382	Nylon Cable Clamp 1/4in I.D.		X	X
5383	Nylon Cable Clamp 3/8in I.D.		X	
5384	Nylon Cable Clamp 1/2in I.D.		X	X
6021	Rnd Head Screw (#6 8 10-32 x 1/2in 1-1/2in) zn Pltd.	X		
6101	Motor Shaft Keys (1/8in 3/16in 1/4in 3/16in x 1/4in) zn Pltd.	X		
6102	Motor Shaft Keys (1/4insq 5/16insq 3/8insq) zn Pltd.	X		
6183	Terminal Block 20A-250V 6 pos			X
6185	Terminal Block 20A-250V 10 pos			X
6187	Terminal Block 20A-250V 14 pos			X
6211	Tab Ad. S. F Dbl M. .250 Non-Ins.			X
6212	Dbl. M. Tab Ad. S. F. Non-Ins.			X
6216	Ring 16-14 Ins. #10 Stud			X
6218	Slip-on F 16-14 Ins. .250		X	X
6219	Slip-on M 16-14 Ins. .250		X	X
6224	Flag F QD 12-10 Non-Ins. .250		X	X
6229	Slip-on F 16-14 Full Ins. .250		X	
6235	Slip-on F 22-18 Ins. .250		X	X
6237	Spade 22-18 Ins. #8 Stud		X	X
6249	M Tab 1 pair bent 90 Non-Ins.			X
6251	Slip-on F 12-10 Ins. .250		X	X
6252	Ring 12-10 Ins. #10 Stud		X	X
6253	Ring 12-10 Ins. 1/4in Stud		X	X
6255	Spade 12-10 Ins. #10 Stud		X	X
6258	Comp. Flag F. 16-14 Non-Ins. .250		X	X
6259	Comp. Flag F. 12-10 Non-Ins. .250			X
6269	Cable Tie Mount		X	
6270	Comp. Flag F. 12-8 Non-Ins. .250		X	X
6272	Ring 16-14 Ins. #6 Stud			X
6274	Spade 16-14 Ins. #6 Stud		X	
6276	Spr. Spade 16-14 Ins. #6 Stud		X	X
6281	Slip-on F 16-14 Ins. .187		X	X
6282	Slip-on F 22-18 Ins. .187		X	
6291	Wire Connector Mini-Gray		X	X
6292	Wire Connector Tiny-Blue		X	X
6293	Wire Connector Small-Orange		X	X
6294	Wire Connector Medium-Yellow		X	X
6296	Wire Connector Large-Red		X	X
6298	Wire Connector XLarge-Gray		X	
6336	Thermostat Wire 3 Conduct. 40 ft.	X		
6337	Thermostat Wire 5 Conduct. 40 ft.	X		
6341	SJTO Service Cord 16 GA 20 ft.	X	X	
6343	SJTO Service Cord 14 GA 20 ft.	X	X	
6370	Heat Shrink Tubing Assort. B&W 1/8in & 1/4in supplied 6in	X		X
6413	Fin. Hex Nut 1/4in-20 zn Pltd.			X
6501	Fin. Hex Nut 1/4in-20 zn Pltd.		X	X
6503	Fin. Hex Nut 3/8in-16 zn Pltd.		X	X
6642	HH Cap Screw 3/8in-16 x 1in		X	
6643	HH Cap Screw 3/8in-16 x 1 1/2in		X	
6701	Flat Washer 3/16in Uss zn Pltd.		X	
6702	Flat Washer 1/4in Uss zn Pltd.		X	X

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
6703	Flat Washer 5/16in Uss zn Pltd.		X	
6704	Flat Washer 3/8in Uss zn Pltd.		X	X
6706	Flat Washer 1/2in Uss zn Pltd.		X	
6722	Fender Washer 1/4in zn Pltd.		X	X
6724	Fender Washer 3/8in zn Pltd.		X	X
7033	Toggle Bolt w/wing 3/16inx4inzn Pltd.		X	
7034	Toggle Bolt w/wing 1/4inx4in zn Pltd.		X	
60210	Tab Ad. Ins. .250 16-14 multi stack male & female		X	X
60251	Slip-On F 12-10 Non-Ins. .250		X	X
60259HX	Comp. Lead Kit 12in 10ga wire		X	X
60264CX	Cable Tie 6in w/ #8 Hole 30# 1-3/8in B. Dia nat 100/PK		X	
60265LX	Cable Tie 14in 50# 4in B. Dia natural 50 pcs		X	
61233LX	Slip-on M & F 16-14 .250 Full Ins Nylon 50 pcs		X	X
6211CX	Tab Ad. S. F Dbl M Non-Ins. 100 pcs		X	X
6213CX	Flag F QD 16-14 Non-Ins. .250 100 pcs		X	X
6214CX	Slip-on F 16-14 Non-Ins. .250 100 pcs		X	X
6216LX	Ring 16-14 Ins. #10 Stud 50 pcs		X	X
6217CX	Butt Conn. 16-14 Ins. 100 pcs		X	X
6217LX	Butt Conn. 16-14 Ins. 50 pcs		X	X
6218LX	Slip-on F 16-14 Ins. .250 50 pcs		X	X
6222LX	Dead End Conn. 22-14 Fully Ins. 50 pcs		X	X
6223LX	Dead End Conn. 18-10 Fully Ins. 50 pcs		X	X
6227LX	Spade 16-14 Ins. #8 Stud		X	X
6228LX	Spade 16-14 Ins. #10 Stud 50 pcs		X	X
6229LX	Slip-on F 16-14 Full Ins. .250		X	X
6231LX	Butt Conn. 12-10 Ins. 50 pcs		X	X
6232LX	Butt Conn. 22-18 Ins. 50 pcs		X	X
6233LX	Slip-on F 16-14 .250 Full Ins. Nylon 50 pcs		X	X
6234LX	Slip-on M 16-14 .250 Full Ins. Nylon 50 pcs		X	X
6235LX	Slip-on F 22-18 Ins. .250 50 pcs		X	X
6236LX	Ring 22-18 Ins. #8 Stud 50 pcs		X	X
6239LX	Spr. Spade 16-14 Ins. #8 Stud		X	X
6251LX	Slip-on F 12-10 Ins. .250		X	X
6252LX	Ring 12-10 Ins. #10 Stud		X	X
6255LX	Spade 12-10 Ins. #10 Stud 50 pcs		X	X
6257NX	Ring #8 Ins. 1/4in Stud 25 pc		X	X
6258CX	Comp. Flag F. 16-14 Non-Ins. .250 100 pcs		X	X
6259CX	Comp. Flag F. 12-10 Non-Ins. .250 100 pcs		X	X
6261CX	Cable Tie 6in 18# 1-3/8in B. Dia natural 100 pcs		X	X
6262CX	Cable Tie 7-1/2in 50# 1-3/4in B. Dia natural 100 pcs		X	X
6263CX	Cable Tie 11in 50# 3in B. Dia natural 100 pcs		X	X
6263BCX	Cable Tie 11in 50# 3in B. Dia black 100 pcs		X	
6264CX	Cable Tie 7in w/ #10 Hole 50# 1-3/4in B. Dia nat 100/PK		X	X
6269LX	Cable Tie Mount 50 pcs		X	
6270LX	Comp. Flag F. 12-8 Non-Ins. .250 50 pcs		X	X
6277NX	Flag F QD 16-14 .250 Fully Ins. Nylon 25 pcs		X	X
6281LX	Slip-on F 16-14 Ins. .187 50 pcs		X	X
6289LX	Bullet Plug & Rec. 16-14 Ins. 50 pcs		X	X
6295X	Assorted Wire Connectors		X	X
6310X	Grease Fitting Assortment box		X	
6332B	Hook-up Wire 16ga blk. 48 ft	X		
6332R	Hook-up Wire 16ga red. 48 ft	X		
6332W	Hook-up Wire 16ga wht. 48 ft	X		
6333B	Hook-up Wire 14ga blk. 48 ft			X
6333G	Hook-up Wire 14ga grn. 48 ft			
6333R	Hook-up Wire 14ga red. 48 ft			X
6333W	Hook-up Wire 14ga wht. 48 ft			X
6334B	Hook-up Wire 12ga blk. 48 ft			X

continued

DEVCO RACKS MASTER ITEM LIST (BY RACK) cont'd

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
6334R	Hook-up Wire 12ga red 48 ft	X		X
6334W	Hook-up Wire 12ga wht. 48 ft			X
6335B	Hook-up Wire 10ga blk. 48 ft	X		X
6335R	Hook-up Wire 10ga red 48 ft	X		X
6335W	Hook-up Wire 10ga wht. 48 ft	X		X
6500A	Asst Mach. Screw Hex Nuts 6-32 8-32 10-32 zn Pltd.			X
6503CX	Fin. Hex Nut 3/8in-16 zn Pltd. 100 pcs		X	
6700AX	Flat Washer Assortment Pack 3/16 1/4 5/16 3/8 1/2 5/8 inch		X	
6943CX	Self Drilling Screw #8x1/2in 1/4in Hex Head zn Pltd. 100/PK		X	X
6945CX	Self Drilling Screw #8x3/4in 1/4in Hex Head zn Pltd. 100/PK		X	X
6946CX	Self Drilling Screw #8x1in 1/4in Hex Head zn Pltd. 100/PK		X	X
6953CX	Drill Tip Screw #10x1/2in 5/16in Hex Head 100/PK		X	X
6955CX	Drill Tip Screw #10x3/4in 5/16in Hex Head 100/PK		X	X
6956CX	Self Drilling Screw #10x1in 5/16in Hex Head zn Pltd. 100/PK		X	X
7036X	Toggle Bolt w/wing 3/8inx4in zn Pltd.		X	
7101CX	Anch Kit Yellow #8x1in w 3/16in bit 100 s + 100 a		X	X
7102CX	Anch Kit Red #10x1-1/4in w 1/4in bit 100 s + 100 a		X	X
7103CX	Anch Kit Blue #4x3/4in w 5/32in bit 100 s + 100 a		X	X
7106CX	Plug Anchor Kit Green #10x1in 1/4in bit 100 s + 100 a bag		X	
7111CX	Plug Anchor Kit Blue #14x1in w 5/16in bit 100 s + 100 a bag		X	
DE13	Magnetic Hex Chuck 1/4in x 1-3/4in		X	
DE14	Magnetic Hex Chuck 5/16in x 1-3/4in		X	
DE15	Magnetic Hex Chuck 3/8in x 1-7/8 in		X	
DE23	Magnetic Hex Chuck 1/4in x 2-9/16 in		X	
ED1232	Toggle Switch D.P. 30A-120/277V brown			X
ED1238	Toggle Switch S.P. 20A-120/277V brown			X
ED1240-2	Toggle Switch S.P. 15A-120/277V brown	X		
ED1262-2	Toggle Switch D.P. 15A-120/277V brown			X
ED1301	Toggle Switch S.P. 15A-120V brown	X		X
ED1876	Single Receptacle 20A-250V 2 pl. 3 wr. brown	X		
ED1876-I	Single Receptacle 20A-250V 2 pl. 3 wr. ivory	X		
ED270	Duplex Receptacle 15A-125V 2 pl. 3 wr. brown			X
ED270-I	Duplex Receptacle 15A-125V 2 pl. 3 wr. ivory	X		
ED273CX	Electrical Staple insul size #5 5/8in x 1/4in 100/PK	X		X
ED2867	Armored Plug 15A-125V 2pl.3 wr. vinyl enclosed			X
ED2887	Armored Connector 15A-125V 2pl. 3 wr. vinyl enclosed			X
ED320	Vinyl Grommet Asst. contains: ED300 thru ED316	X	X	X
ED447	Bat Handle Switch metal SPST on-off 10A/277V-20A/125V AC	X		X
ED453	Bat Handle Switch metal DPDT on-on 10A/277V-20A/125V AC	X		X
ED454	Bat Handle Switch metal SPDT on-on 10A/277V-20A/125V AC	X		
ED455	Bat Handle Switch metal DPST on-off 10A/277V-20A/125V AC	X		X
ED468	Bat Handle Switch metal SPDT on-off-on 10A/277V-20A/125V	X		X
ED494	Bat Handle Switch metal DPDT on-off-on 10A/277V-20A/125V	X		X
ED5225	Switch & Receptacle 2p 3w (sw:15A-120VAC& rec:15A-125VAC) bm	X		
ED600	Indicator Light 28V red PC lens incandescent bulb	X		
ED601	Indicator Light 28V green PC lens incandescent bulb	X		
ED602	Indicator Light 28V amber PC lens incandescent bulb	X		
ED610	Indicator Light 105-125V AC red nylon lens neon bulb	X		
ED611	Indicator Light 105-125V AC grn PC lens neon blb-G2B Imp&resstr	X		
ED877	Duplex Receptacle 20A-125V 2 pl. 3 wr. brown			X
EM480	In-Line Fuse Holder 1-1/4 x 1/4in fuses to 20A/32V 14ga	X		X
ED-AT3	Blade Fuses - 3 Amp - Purple, Pack of 10	X	X	X
ED-AT5	Blade Fuses - 5 Amp - Tan, Pack of 10	X	X	X
ED-CR15	Dual Element Fuses - 15 Amp, Pack of 2	X		X
ED-CR20	Dual Element Fuses - 20 Amp, Pack of 2	X		X
ED-CR25	Dual Element Fuses - 25 Amp, Pack of 2	X		X
ED-CR30	Dual Element Fuses - 30 Amp, Pack of 2	X	X	X
ED-CR35	Dual Element Fuses - 35 Amp, Pack of 2	X		X
ED-CR40	Dual Element Fuses - 40 Amp, Pack of 2	X		X
ED-CR45	Dual Element Fuses - 45 Amp, Pack of 2	X		X

ITEM #	ITEM DESCRIPTION	ELEC	EZC	COMBO
ED-CR50	Dual Element Fuses - 50 Amp, Pack of 2	X		X
ED-CR60	Dual Element Fuses - 60 Amp, Pack of 2	X	X	X
HC5410	Hose Clamp 9/16in-1-1/8in SShousing&band st hex screw	X		X
HC5416	Hose Clamp 3/4in-1-1/2in SShousing&band st hex screw	X		
HC6202	Hose Clamp 1/4in-5/8in SS housing&band st hex screw	X		X
HC6203	Hose Clamp 5/16in-7/8in SShousing&band st hex screw	X		X
PI301	Cond Nip 1/2in offset zn w pltd. stl locknuts insul. bushings			X
PI303	Cond Nip 1/2in strlt galv steel w pltd. stl lock insul.			X
PI310	Reduc. Wash 3/4in to 1/2in Rsd Fin Galv St			X
PI312	BX Conct set screw 3/8in Tr. 1/2in KO. zn die cast			X
PI315	BX Connector 90 3/8inTr. 1/2in KO zn die cast	X	X	X
PI316	Knockout Seal for 1/2in KO zn Pltd. steel	X		
PI319	Romex Connector 3/4in Tr. 3/4in KO. zn Pltd. die cast	X		
PI320	Romex Connector 3/8in Tr. 1/2in KO. zn Pltd. die cast 25/PK	X	X	X
PI321	Romex Connector 3/8in Tr. 1/2 in KO. zn Pltd. die cast	X	X	X
PI322	BX Conct str sqze 3/8in Tr. 1/2in KO. zn die cast	X		
PI328	Split Bolt Connector Cu use (6 max sol & 7 max strnd)			X
PI330	Romex Stop plastic 3/8inx1/2in for 2 cond. romex 12/2-14/2	X		
PI331	Plastic in Anti-Shortin Bush 14/2 14/3 & 12/2 BX cable	X		
PI340	Combo Cable Connector for romex & BX 3/8in Tr. 1/2in KO	X		
PI350	Metal LT Conn straight 1/2in Tr. 1/2in K.O	X		
PI351	Metal LT Conn straight 3/4in Tr. 3/4in K.O.	X		
PI352	Liquid Tight Connector 90 1/2in Tr. 1/2in K.O. zn die cast	X		
PI353	Liquid Tight Connector 90 3/4in Tr. 3/4in K.O. zn die cast	X		
PI360	Box galv. steel 4in x 2-1/8inx 1-7/8in 1/2in KO 13 in3	X		X
PI361	Box galv. steel 4in x 2-1/8inx 2-1/8in 1/2in KO 14.5 in3	X		X
PI362	1900 Box galv. steel 4X4X1-1/2 1/2&3/4 KO 21 in3	X		X
PI363	1900 Box galv. steel 4X4X2-1/8in 1/2&3/4 KO 30.3 in3	X		X
PI365	Utility Cover Toggle Switch 2-11/32in x 4-1/4in Pltd. steel	X		
PI368	1900 Cover Sw/Dup Rec cad fin. steel 4in x 4in raisd 1/2in	X		X
PI371	1900 Cover Blank Flat galv. steel	X		X
PI378	1900 Cover Duplex Recep cadil fin. steel 4X4 raisd 1/2in	X		
PI381	Fuse Outlet & Switch w cover 1/2HP-125V AC galv. steel			X
PI382	Weatherproof Cover Blank Al 1 Gang w gasket anodized	X		
PI385	Wthprf Box AL2-3/4inx4-1/2inx23 1/2in holes 2 plugs 19 in3	X		
WM1002	Cable Marker Book alpha numer	X		
WM1003	Cable Marker Book numeric contains 10 each: 1 - 45	X	X	
WM1009	Cable Marker Book line & term	X		

**SLIP-ON SOLDERLESS TERMINALS****Insulated Male Slip-Ons**

These male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
60219	Insulated Male Slip-On, pack of 23	22-18	.250	PK	1
60220	Insulated Male Slip-On, pack of 23	16-14	.187	PK	1
60220LX	Insulated Male Slip-On, pack of 50	16-14	.187	PK	1
6219	Insulated Male Slip-On, pack of 22	16-14	.250	PK	1
6219LX	Insulated Male Slip-On, pack of 50	16-14	.250	PK	1
61221LX	Insulated Male Slip-On, pack of 50	12-10	.250	PK	1
61221CX	Insulated Male Slip-On, pack of 100	12-10	.250	PK	1

Insulated Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6282	Insulated Female Slip-On, pack of 22	22-18	.187	PK	1
6282LX	Insulated Female Slip-On, pack of 50	22-18	.187	PK	1
6235	Insulated Female Slip-On, pack of 22	22-18	.250	PK	1
6235LX	Insulated Female Slip-On, pack of 50	22-18	.250	PK	1
6235CX	Insulated Female Slip-On, pack of 100	22-18	.250	PK	1
6281	Insulated Female Slip-On, pack of 22	16-14	.187	PK	1
6281LX	Insulated Female Slip-On, pack of 50	16-14	.187	PK	1
6218	Insulated Female Slip-On, pack of 22	16-14	.250	PK	1
6218LX	Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
6218CX	Insulated Female Slip-On, pack of 100	16-14	.250	PK	1
6251	Insulated Female Slip-On, pack of 17	12-10	.250	PK	1
6251LX	Insulated Female Slip-On, pack of 50	12-10	.250	PK	1
6251CX	Insulated Female Slip-On, pack of 100	12-10	.250	PK	1
61223LX	Insulated Female Slip-On, pack of 50	12-10	.340	PK	1

Fully Insulated Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon. This terminal features insulation grip. This terminal is usually supplied vinyl and has an insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6229**	Fully Insulated Female Slip-On, pack of 11	16-14	.250	PK	1
6229LX**	Fully Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
6233	Fully Insulated Female Slip-On, pack of 14	16-14	.250	PK	1
6233LX	Fully Insulated Female Slip-On, pack of 50	16-14	.250	PK	1
6233CX	Fully Insulated Female Slip-On, pack of 100	16-14	.250	PK	1
61234LX	Fully Insulated Female Slip-On, pack of 50	12-10	.250	PK	1

*This terminal features insulation grip.

**This terminal is usually supplied vinyl and has an insulation grip.

Non-Insulated Male Slip-Ons

These non insulated male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6220	Non-Insulated Male Slip-On, pack of 38	16-14	.250	PK	1
6220CX	Non-Insulated Male Slip-On, pack of 100	16-14	.250	PK	1

Non-Insulated Female Slip-Ons

These non insulated female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available. This terminal features insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6221CX	Non-Insulated Female Slip-On, pack of 100	16-14	.187	PK	1
6214	Non-Insulated Female Slip-On, pack of 35	16-14	.250	PK	1
6214CX	Non-Insulated Female Slip-On, pack of 100	16-14	.250	PK	1
60251	Non-Insulated Female Slip-On, pack of 26	12-10	.250	PK	1
60251CX	Non-Insulated Female Slip-On, pack of 100	12-10	.250	PK	1

* This terminal features insulation grip.

Fully Insulated Male Slip-Ons

These male terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6234	Fully Insulated Male Slip-On, pack of 14	16-14	.250	PK	1
6234LX	Fully Insulated Male Slip-On, pack of 50	16-14	.250	PK	1
61235LX	Fully Insulated Male Slip-On, pack of 50	12-10	.250	PK	1

Non-Insulated Flag Female Slip-Ons

These non insulated female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available. Part 6213 features insulation grip.




CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6213	Non-Insulated Flag Female Slip-On, pack of 34	16-14	.250	PK	1
6213CX	Non-Insulated Flag Female Slip-On, pack of 100	16-14	.250	PK	1
6224	Non-Insulated Flag Female Slip-On, pack of 20	12-10	.250	PK	1
6224CX	Non-Insulated Flag Female Slip-On, pack of 100	12-10	.250	PK	1

SLIP-ON SOLDERLESS TERMINALS cont'd

Fully Insulated Flag Female Slip-Ons

These female terminals crimp to the wires which relieves the need to solder. A variety of sizes are available and the slip ons are fully insulated in either vinyl or nylon.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
6277	Fully Insulated Flag Female Slip-On, pack of 9	16-14	.250	PK	1
6277NX	Fully Insulated Flag Female Slip-On, pack of 2516-14	.250	PK	1	

Combination Pack: Set of 6233 and 6234

Our Combination pack holds both a Fully Insulated Male and Female Slip On.



CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
61233LX	Set of Fully Insulated M/F Slip-Ons, pack of 25 pairs	16-14	.250	PK	1

Flag Female Compressor Terminal Kit

Parts 6258, 6271, 6259, 6273, 6270 in a four compartment, clear plastic box. Parts 6270 and 6273 are put in the same compartment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6200HX	Flag Female Compressor Terminal Kit	EA	1

Flag Female Compressor Terminals

Also known as hermetic header terminals, these non-insulated terminals are designed with a larger distance between the "rolls" to allow for the rod in hermetic header applications. The increased distance allows the rod to slip in between them. Parts 6258 and 6259 are notched for bending. The notches are cut between the slip-on portion and the conductor barrel and enable the back of the slip-on portion to be folded against the conductor barrel after the wire connection is made. This terminal features insulation grip.



CATALOG NO.	DESCRIPTION	WIRE RANGE	FITS	UOM	ORDER MULTIPLE
6273LX	Flag Female Compressor Terminal, pack of 50	18-12	.250 tab	PK	1
6270	Flag Female Compressor Terminal, pack of 9	12-8	.250 tab	PK	1
6270LX	Flag Female Compressor Terminal, pack of 50	12-8	.250 tab	PK	1
6258*	Flag Female Compressor Terminal, pack of 17	16-14	.250 tab	PK	1
6258CX*	Flag Female Compressor Terminal, pack of 100	16-14	.250 tab	PK	1
6259	Flag Female Compressor Terminal, pack of 14	12-10	.250 tab	PK	1
6259CX	Flag Female Compressor Terminal, pack of 100	12-10	.250 tab	PK	1

* This terminal features insulation grip.

Compressor Lead Kit

Our Compressor Lead kit includes the following products: a flag female compressor terminal (.250 tab; part 62589), a waterproof butt connector (12 10 wire range; part 62231), and a piece of 10 gauge wire.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
60259HX	Compressor Lead Kit with 12" wire	EA	1

SPECIAL PURPOSE SOLDERLESS TERMINALS

Insulated Plugs


These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6283	Insulated Plugs, pack of 17	22-18	PK	1
6283LX	Insulated Plugs, pack of 50	22-18	PK	1
6285	Insulated Plugs, pack of 17	16-14	PK	1
6285LX	Insulated Plugs, pack of 50	16-14	PK	1

Fully Insulated Receptacles

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6286	Fully Insulated Receptacles, pack of 12	16-14	PK	1

Combination Packs

These insulated terminals crimp to the wires which relieves the need to solder.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6288	Combination Pack with parts 6283 and 6284, pack of 7 pairs	PK	1
6288LX	Combination Pack with parts 6283 and 6284, pack of 25 pairs	PK	1
6289	Combination Pack with parts 6285 and 6286, pack of 7 pairs	PK	1
6289LX	Combination Pack with parts 6285 and 6286, pack of 25 pairs	PK	1

**SPECIAL PURPOSE SOLDERLESS TERMINALS** cont'd**Tab Adapters – Quick Disconnect with Screw**

These insulated terminals crimp to the wires which relieves the need to solder.

**6209**

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6209	Fits .250 Tab, #6-32 x 1/4" Screw, pack of 5		PK	1
6209LX	Fits .250 Tab, #6-32 x 1/4" Screw, pack of 50		PK	1

Tab Adapters – Single Female Double Male Tabs

These insulated terminals crimp to the wires which relieves the need to solder. .250 male, .250 female.

**6211**

CATALOG NO.	DESCRIPTION	TAB SIZE	UOM	ORDER MULTIPLE
6208	Tab Adapter; 1 female, 2 male; Bent 90°, pack of 12	.250	PK	1
6208LX	Tab Adapter; 1 female, 2 male; Bent 90°, pack of 50	.250	PK	1
6211	Tab Adapter; 1 female, 2 male; Wye, pack of 27	.250	PK	1
6211CX	Tab Adapter; 1 female, 2 male; Wye, pack of 100	.250	PK	1
6212	Tab Adapter; 1 female, 2 male; Stacked, pack of 16	.250	PK	1
6212CX	Tab Adapter; 1 female, 2 male; Stacked, pack of 100	.250	PK	1

Tap Connectors

These insulated terminals crimp to the wires which relieves the need to solder. Designed to make tap splices.

**6241**

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6241	Tap Splice – blue, pack of 15	16-14	PK	1

Tab Adapters – Piggy Back Slip-Ons

These insulated terminals crimp to the wires which relieves the need to solder. Multi-stack, .250 male tab, .250 female slip-on.

**60210**

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6210	Non-Insulated Piggy Back Slip-Ons, pack of 20	16-14	PK	1
60210	Insulated Piggy Back Slip-Ons, pack of 11	16-14	PK	1
60210LX	Insulated Piggy Back Slip-Ons, pack of 50	16-14	PK	1
60210CX	Insulated Piggy Back Slip-Ons, pack of 100	16-14	PK	1

Tab Adapters – Male Tabs

These insulated terminals crimp to the wires which relieves the need to solder.

**6230**

CATALOG NO.	DESCRIPTION	TAB SIZE	STUD	UOM	ORDER MULTIPLE
6230	Male Tabs – Straight, pack of 28	.250	#8	PK	1
6230CX	Male Tabs – Straight, pack of 100	.250	#8	PK	1

Fully Insulated Dead End Connectors

These insulated terminals crimp to the wires which relieves the need to solder.

**6222**

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6222	Fully Insulated Dead End Connectors, pack of 27	22-14	PK	1
6222LX	Fully Insulated Dead End Connectors, pack of 50	22-14	PK	1
6223	Fully Insulated Dead End Connectors, pack of 21	18-10	PK	1
6223LX	Fully Insulated Dead End Connectors, pack of 50	18-10	PK	1

STANDARD SOLDERLESS TERMINALS**Insulated Hooks**

These insulated terminals crimp to the wires which relieves the need to solder.

**6242**

CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6242	Insulated Hooks, pack of 22	22-18	#8	PK	1
6242LX	Insulated Hooks, pack of 50	22-18	#8	PK	1
6244	Insulated Hooks, pack of 20	16-14	#8	PK	1
6244LX	Insulated Hooks, pack of 50	16-14	#8	PK	1

Insulated Butt Connectors

These insulated terminals crimp to the wires which relieves the need to solder.

**6232**

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
6232	Insulated Butt Connector, pack of 26	22-18	PK	1
6232LX	Insulated Butt Connector, pack of 50	22-18	PK	1
6232CX	Insulated Butt Connector, pack of 100	22-18	PK	1
6217	Insulated Butt Connector, pack of 27	16-14	PK	1
6217LX	Insulated Butt Connector, pack of 50	16-14	PK	1
6217CX	Insulated Butt Connector, pack of 100	16-14	PK	1
6231	Insulated Butt Connector, pack of 16	12-10	PK	1
6231LX	Insulated Butt Connector, pack of 50	12-10	PK	1
6231CX	Insulated Butt Connector, pack of 100	12-10	PK	1
6287	Insulated Butt Connector, pack of 5	22-18	PK	1
6287XX	Insulated Butt Connector, pack of 10	8	PK	1
6287NX	Insulated Butt Connector, pack of 25	8	PK	1

STANDARD SOLDERLESS TERMINALS cont'd

Butt Connector Assortment Kit

This Assortment is a perfect addition to the HVAC kit. It includes an Insulated Butt Connector, a Non Insulated Butt Connector, and a Nylon Insulated Butt Connector. Includes parts 6217, 6231, and 6232.

6200BSX



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6200BSX	Butt Connector Assortment Kit	EA	1

Insulated Spades

These insulated terminals crimp to the wires which relieves the need to solder.

61214



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61214	Insulated Spades, pack of 23	22-18	#6	PK	1
6237	Insulated Spades, pack of 22	22-18	#8	PK	1
6237LX	Insulated Spades, pack of 50	22-18	#8	PK	1
61256LX	Insulated Spades, pack of 50	22-18	#10	PK	1
6274	Insulated Spades, pack of 22	16-14	#6	PK	1
6274LX	Insulated Spades, pack of 50	16-14	#6	PK	1
6227	Insulated Spades, pack of 22	16-14	#8	PK	1
6227LX	Insulated Spades, pack of 50	16-14	#8	PK	1
6228	Insulated Spades, pack of 22	16-14	#10	PK	1
6228LX	Insulated Spades, pack of 50	16-14	#10	PK	1
60254	Insulated Spades, pack of 18	12-10	#8	PK	1
60254LX	Insulated Spades, pack of 50	12-10	#8	PK	1
60254CX	Insulated Spades, pack of 100	12-10	#8	PK	1
6255	Insulated Spades, pack of 17	12-10	#10	PK	1
6255LX	Insulated Spades, pack of 50	12-10	#10	PK	1
6255CX	Insulated Spades, pack of 100	12-10	#10	PK	1

Insulated Flange Spades

These insulated terminals crimp to the wires which relieves the need to solder.

61237



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61237	Insulated Flange Spades, pack of 21	22-18	#8	PK	1
61255	Insulated Flange Spades, pack of 16	12-10	#10	PK	1
61255LX	Insulated Flange Spades, pack of 50	12-10	#10	PK	1

Non-Insulated Rings

These non insulated terminals crimp to the wires which relieves the need to solder.

60206



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
60206	Non-Insulated Rings, pack of 25	22-18	#10	PK	1
61209	Non-Insulated Rings, pack of 19	22-18	5/16"	PK	1
61211	Non-Insulated Rings, pack of 20	22-18	3/8"	PK	1
6215	Non-Insulated Rings, pack of 27	16-14	#8	PK	1
60215	Non-Insulated Rings, pack of 24	16-14	#10	PK	1
60205	Non-Insulated Rings, pack of 21	16-14	1/4"	PK	1
60205CX	Non-Insulated Rings, pack of 100	16-14	1/4"	PK	1
61205	Non-Insulated Rings, pack of 23	16-14	5/16"	PK	1
61245	Non-Insulated Rings, pack of 17	16-14	3/8"	PK	1

Non-Insulated Spades

These non insulated terminals crimp to the wires which relieves the need to solder.

61215



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61275CX	Non-Insulated Spades, pack of 100	16-14	#6	PK	1
6226	Non-Insulated Spades, pack of 23	16-14	#10	PK	1
6226CX	Non-Insulated Spades, pack of 100	16-14	#10	PK	1
6254CX	Non-Insulated Spades, pack of 100	12-10	#10	PK	1

Insulated Spring Spades

These insulated terminals crimp to the wires which relieves the need to solder.

6238



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
6238	Insulated Spring Spades, pack of 22	22-18	#8	PK	1
6238LX	Insulated Spring Spades, pack of 50	22-18	#8	PK	1
6276	Insulated Spring Spades, pack of 21	16-14	#6	PK	1
6276LX	Insulated Spring Spades, pack of 50	16-14	#6	PK	1
6239	Insulated Spring Spades, pack of 22	16-14	#8	PK	1
6239LX	Insulated Spring Spades, pack of 50	16-14	#8	PK	1
60256	Insulated Spring Spades, pack of 17	12-10	#8	PK	1
60256CX	Insulated Spring Spades, pack of 100	12-10	#8	PK	1

Insulated Rings

These insulated terminals crimp to the wires which relieves the need to solder.

61202



CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
61202	Insulated Rings, pack of 22	22-18	#6	PK	1
6236LX	Insulated Rings, pack of 50	22-18	#8	PK	1
6272	Insulated Rings, pack of 22	16-14	#6	PK	1
6216	Insulated Rings, pack of 23	16-14	#10	PK	1
6216LX	Insulated Rings, pack of 50	16-14	#10	PK	1
6216CX	Insulated Rings, pack of 100	16-14	#10	PK	1
60247	Insulated Rings, pack of 17	12-10	#6	PK	1
60252CX	Insulated Rings, pack of 100	12-10	#8	PK	1
6252	Insulated Rings, pack of 17	12-10	#10	PK	1
6252LX	Insulated Rings, pack of 50	12-10	#10	PK	1
6253LX	Insulated Rings, pack of 50	12-10	1/4"	PK	1
6253CX	Insulated Rings, pack of 100	12-10	1/4"	PK	1
60253LX	Insulated Rings, pack of 50	12-10	3/8"	PK	1
6257	Insulated Rings, pack of 6	8	1/4"	PK	1
6257NX	Insulated Rings, pack of 25	8	1/4"	PK	1
61252	Insulated Rings, pack of 5	6	5/16"	PK	1
61252NX	Insulated Rings, pack of 25	6	5/16"	PK	1



WATERPROOF SOLDERLESS TERMINALS

Waterproof Butt Connectors

Waterproof Butt Connectors are assembled with high grade heat shrinkable insulation. When heated, the insulation shrinks around the crimped connection and wire, effectively sealing out moisture and corrosion. Use a wire insulation grip for severe vibration applications.



62232

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
62232	Waterproof Butt Connectors, pack of 4	22-18	PK	1
62232XX	Waterproof Butt Connectors, pack of 10	22-18	PK	1
62231	Waterproof Butt Connectors, pack of 3	12-10	PK	1
62231XX	Waterproof Butt Connectors, pack of 10	12-10	PK	1

HIGH TEMPERATURE SOLDERLESS TERMINALS

High Temperature Male Slip-Ons

The High Temperature Male Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4220

CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4220	High Temp. Male Slip-Ons, pack of 21	16-14	.250	PK	1
4220CX	High Temp. Male Slip-Ons, pack of 100	16-14	.250	PK	1
4219	High Temp. Male Slip-Ons, pack of 21	12-10	.250	PK	1

High Temperature Flag Female Slip-Ons

The High Temperature Flag Female Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4213

CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4213	High Temp. Flag Female Slip-Ons, pack of 16	16-14	.250	PK	1
4213CX	High Temp. Flag Female Slip-Ons, pack of 100	16-14	.250	PK	1
4224	High Temp. Flag Female Slip-Ons, pack of 11	12-10	.250	PK	1
4224NX	High Temp. Flag Female Slip-Ons, pack of 25	12-10	.250	PK	1
4224CX	High Temp. Flag Female Slip-Ons, pack of 100	12-10	.250	PK	1

High Temperature Rings

The High Temperature Rings are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4252

CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
4215	High Temp. Rings, pack of 21	16-14	#10	PK	1
4215CX	High Temp. Rings, pack of 100	16-14	#10	PK	1
4205CX	High Temp. Rings, pack of 100	16-14	1/4"	PK	1
4252	High Temp. Rings, pack of 14	12-10	#10	PK	1
4252CX	High Temp. Rings, pack of 100	12-10	#10	PK	1
4253	High Temp. Rings, pack of 14	12-10	1/4"	PK	1
4253CX	High Temp. Rings, pack of 100	12-10	1/4"	PK	1

High Temperature Female Slip-Ons

The High Temperature Female Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4221

CATALOG NO.	DESCRIPTION	WIRE RANGE	TAB SIZE	UOM	ORDER MULTIPLE
4221	High Temp. Female Slip-Ons, pack of 20	16-14	.187	PK	1
4221CX	High Temp. Female Slip-Ons, pack of 100	16-14	.187	PK	1
4214	High Temp. Female Slip-Ons, pack of 21	16-14	.250	PK	1
4214CX	High Temp. Female Slip-Ons, pack of 100	16-14	.250	PK	1
4204	High Temp. Female Slip-Ons, pack of 17	12-10	.250	PK	1
4204CX	High Temp. Female Slip-Ons, pack of 100	12-10	.250	PK	1

High Temperature Spades

The High Temperature Spades Slip Ons are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4226

CATALOG NO.	DESCRIPTION	WIRE RANGE	STUD	UOM	ORDER MULTIPLE
4226	High Temp. Spades, pack of 23	16-14	#10	PK	1
4226CX	High Temp. Spades, pack of 100	16-14	#10	PK	1
4254CX	High Temp. Spades, pack of 100	12-10	#10	PK	1

High Temperature Butt Connectors

The High Temperature Butt Connectors are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C).



4231

CATALOG NO.	DESCRIPTION	WIRE RANGE	UOM	ORDER MULTIPLE
4231	High Temp. Butt Connectors, pack of 17	12-10	PK	1

High Temperature Assortment

The High Temperature Assortment Pack holds terminals that are constructed of nickel plated steel. These non insulated terminals are rated at 900 degree F (482 degree C). Includes parts 4213, 4215, and 4204, and 4254.



4200AX

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4200AX	High Temp. Assortment	EA	1

DEVCO TERMINAL KITS

CATALOG NO.	DESCRIPTION	TERMINALS															
NOTE: Some kits have parts not shown in chart. Please refer to the DESCRIPTION for these parts. Except where noted, kits come in clear plastic boxes.																	
6200HX	Flag Female Compressor Terminal Kit: 8-18 wire range in a 4-compartment box with parts 6270 and 6273 in the same compartment.												6258	6259	6270 6271 6273		
6200MX 6200MSX*	.187, .250 tabs; 12-10 wire range; #8, #10 studs in a 13-compartment polypropylene box.	6217 6231 6232	6218 6235 6251 6281	6216 6252				6213						6259			6211
6201MX	.187, .250 tabs; 22-10 wire range; #8, #10 studs in a 21-compartment metal box. (Includes parts 6233, 6234, and 6277, not shown in chart).	6217 6231 6232	6218 6235 6251 6281 6282	6216 6236 6252	6228	6238 6239			6224				6258	6259			6211
6202MX	Insulated Terminal Kit: .187, .250 tabs; 22-10 wire range; #8, #10, #6, 1/4" studs in an 18-compartment box. Parts 6233 & 6234, and parts 6222 & 6223 are pairs (not shown in chart).	6217 6231 6232	6218 6235 6251 6281 6282	6216 6252 6253 6272 60246	60254	6238 6239											
6203MX	Non-Insulated Terminal Kit: Includes High Temp. Terminals and Flag Female Compressor Terminals. .250 tab; 22-10 wire range; #8, #10 studs in an 18-compartment box. (Includes parts 6209 and 6210, not shown in chart).			4204 4213 4214 4215 4252 4254			6214	6213	6224				6258	6259	6270 6271	6230	6208 6211
4200AX	High Temperature Terminal Kit: .250 tab; 16-10 wire; #10 stud in a bag.			4204 4213 4215 4254													
6200X	.250 tab; 16-14 wire; #8 stud in a 6-compartment box.	6217						6214	6213		6215					6230	6211
6200AX	.250 tab; 16-14 wire range; #8, #10 studs in a 6-compartment box.	6217	6218	6216				6213								6230	6211
6200BX	.250 tab; 16-14 wire; #8 stud in a 4-compartment box.							6214	6213		6215						6211
6200BSX	22-10 wire range in a bag.	6217 6231 6232															
6200CX	.250 tab; 16-14 wire; #10 stud in a 4-compartment box.		6218	6216				6213									6211
6200DX	.250 tab; 12-10 wire range; #8, #10 studs in a 6-compartment box.	6231	6251	6252					6224							6230	6211

*Contains a crimper.



ANCHORS

Metal Drive Anchors

The anchors offer a Quick and Easy Solution for Light Duty Anchoring Jobs in Concrete and Masonry and Easy through type fastening, even when used in bottomless holes

7236R



CATALOG NO.	DESCRIPTION	SIZE	EMBEDMENT	PULLOUT LOAD	UOM	ORDER MULTIPLE
7233RLX	Drive Anchor, pack of 50	1/4" X 3/4"	5/8"	500 lb.	PK	1
7234RLX	Drive Anchor, pack of 50	1/4" X 1"	7/8"	944 lb.	PK	1
7235RLX	Drive Anchor, pack of 50	1/4" X 1-1/4"	1-1/8"	1,146 lb.	PK	1
7236RLX	Drive Anchor, pack of 50	1/4" X 1-1/2"	1-3/8"	854 lb.	PK	1

Drop-In Expansion Anchor Setting Tool

This tool is great for use while setting an anchor.

7146



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7146	For use with anchor part number 7142	EA	1

Self-Drilling Gypsum Wallboard Anchors

These anchors pre drill precise holes in gypsum wallboard with no special tools required. The anchors are easily installed with a #2 or #3 Phillips screwdriver, slotted driver, or power driver. Plastic plugs toggles and toggles are easily replaced with the deep threaded products. There is a full range to cover all wall fastening applications and are available in corrosion resistant and non conductive white nylon. The product has a low profile head and can easily be backed out. They provide a strong engagement in 3/4in., 1/2in., and 5/8in. gypsum wallboard and are supplied with combo head screws.

7321X



CATALOG NO.	DESCRIPTION	SCREW SIZE	MAX. FIXTURE	UOM	ORDER MULTIPLE
7316X	E-Z Ancor®; nylon, pack of 10	#8 x 1-1/4"	3/4"	PK	1
7316L	E-Z Ancor®; nylon, pack of 50	#8 x 1-1/4"	3/4"	PK	1
7311L	E-Z Ancor®; zinc die cast*, pack of 50	#6 x 1-1/4"	3/4"	PK	1
7317X	E-Z Ancor Lite™; nylon, pack of 10	#6 x 1-1/4"	3/4"	PK	1
7317L	E-Z Ancor Lite™; nylon, pack of 50	#6 x 1-1/4"	3/4"	PK	1
7321X	E-Z Toggle™; zinc die cast; heavy-duty, pack of 10	#8 x 2-1/8"	5/8"	PK	1

*Smaller version of the E-Z Ancor® with a versatile core that can use #6 or #8 sheet metal screws or #6, #7, #8 drywall screws.

Drive Fasteners

These steel fasteners can be driven into dry wall like a nail and are secured by turning the screw down completely to expand the ribs.

7303



CATALOG NO.	DESCRIPTION	HOLE SIZE	GRIP RANGE	UOM	ORDER MULTIPLE
7302	Drive Fastener, pack of 6	1/4"	1/8" to 1/2"	PK	1
7303	Drive Fastener, pack of 6	1/4"	1/8" to 3/16"	PK	1

Drop-In Expansion Anchors

These heavy duty anchors are made of carbon steel. They are set by means of an internal plug and setting tool.

7142



CATALOG NO.	DESCRIPTION	BOLT SIZE	THREADS PER INCH	HOLE DEPTH	THREAD DEPTH	DRILL BIT SIZE	UOM	ORDER MULTIPLE
7142	Anchor, pack of 4	3/8"	18	1-5/8"	1/2"	1/2"	PK	1
7142LX	Anchor, pack of 50	3/8"	18	1-5/8"	1/2"	1/2"	PK	1

DEVCO PLASTIC ANCHOR KITS

CATALOG NO.		ANCHOR	DRILL SIZE	DRILL BIT INCLUDED	SCREW	SCREW SIZE
SMALL PACK*	100 PACK					
	7103CX		<u>5/32</u> 			#4 x 3/4"
	7101CX		<u>3/16</u> 			#8 x 1"
	7101HCX					#8 x 1"
	7102CX		<u>1/4</u> 			#10 x 1-1/4"
	7102HCX					#10 x 1"
	7106CX		<u>1/4</u> 			#10 x 1
7106			<u>1/4</u> 	None		#10 x 1"
7105LX			<u>5/16</u> 			#14 x 1-1/2"
7111X	7111CX		<u>5/16</u> 			#14 x 1"
	7111HCX					#14 x 1"

*SMALL PACK	COUNT
7106	28
7111X	40
7105LX	50



BOXES, RINGS, AND COVERS

Steel Utility Boxes*

Steel Utility Boxes are used for convenience outlets, switch boxes and small junction boxes. Galvanized steel.



PI360

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI360	4"	2-1/8"	1-7/8"	13.0	1/2	EA	1
PI361	4"	2-1/8"	2-1/8"	14.5	1/2	EA	1
PI361-3/4	4"	2-1/8"	2-1/8"	14.5	3/4 & 1/2	EA	1

Steel Octagon Box*

Steel Utility Boxes are used for convenience outlets, switch boxes and small junction boxes. Galvanized steel.



PI364

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI364	4"	4"	1-1/2"	15.5	3/4 & 1/2	EA	1

Device Rings*

Device rings are designed for projects of preexisting locations. They can help narrow an opening for a box in the sheet rock. They are also known as Plaster Rings. Galvanized steel.



PI387

CATALOG NO.	DESCRIPTION	NUMBER DEVICES	RAISED	UOM	ORDER MULTIPLE
PI387	1900 Device Ring	1	1/2"	EA	1

Utility Covers*

These covers are 4 1/4in. x 2 11/32in. and are designed for appliances or emergency oil burners.



PI373

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI383	Appliance Switch, .4687" dia. hole, baked cadilite finish	EA	1
PI374	Red finish, "Emergency Gas Burner" in white letters	EA	1

Steel 1900 Boxes*

Steel Utility Boxes are used for convenience outlets, switch boxes and small junction boxes. Galvanized steel.



PI362

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI362	4"	4"	1-1/2"	21.0	3/4 & 1/2	EA	1
PI363	4"	4"	2-1/8"	30.3	3/4 & 1/2	EA	1

Extension Rings*

Extension rings are used when extra cubic inch capacity is needed for additional wiring. Galvanized steel.



PI390

CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	KNOCKOUT (in.)	UOM	ORDER MULTIPLE
PI390	4"	2-1/8"	1-7/8"	13.0	1/2	EA	1
PI391	4"	4"	1-1/2"	21.0	3/4 & 1/2	EA	1

Plated Steel Utility Covers*

Ideal for exposed work applications, providing an easy method for the installation of electrical devices (switches, receptacles, fans, lights, etc.)



PI365

CATALOG NO.	DESCRIPTION	WIDTH	LENGTH	UOM	ORDER MULTIPLE
PI365	Toggle Switch	2-11/32"	4-1/4"	EA	1
PI366	Duplex Receptacle	2-11/32"	4-1/4"	EA	1
PI367	Blank Cover	2-11/32"	4-1/4"	EA	1
PI375	Standard Single Receptacle	2-11/32"	4-1/4"	EA	1

Utility Plates*

These plates are 4 1/4in. x 2 11/32in. and are designed for emergency oil burners.



PI393

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI393	Red finish, "Emergency Oil Burner" in white letters	EA	1
PI394	Red finish, "Emergency Gas Burner" in white letters	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

BOXES, RINGS, AND COVERS cont'd

Steel 1900 Covers*

The covers are baked in a cadilite finished steel and are raised 1/2in. with fully depressed corners. Size: 4" x 4".


PI370



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI377	Single Toggle	EA	1
PI378	Single Duplex Receptacle	EA	1
PI379	One Standard Single Receptacle	EA	1
PI368	Toggle Switch and Duplex Receptacle	EA	1
PI370	Toggle Switch and Standard Single Receptacle	EA	1
PI371	Flat, Blank, Galvanized steel (not Cadilite finished)	EA	1

Weatherproof Covers*

These covers can be used with item PI385 and come with gaskets.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI382	Blank Cover	EA	1
PI386	Lever Switch Cover for standard toggle type switches	EA	1
PI389	Duplex Receptacle Cover	EA	1
PI389-GFI	GFI Receptacle Cover	EA	1

Weatherproof Boxes*

Heavy duty die cast aluminum with baked aluminum finish. Boxes have two closure plugs and three holes. Item is Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

PI385



CATALOG NO.	LENGTH	WIDTH	DEPTH	CAPACITY (cubic in.)	HOLE SIZE (in.)	UOM	ORDER MULTIPLE
PI385	4-1/2"	2-3/4"	2"	19.0	1/2	EA	1
PI385-34	4-1/2"	2-3/4"	2"	19.0	3/4	EA	1

Weatherproof Box with Lever Switch Cover*

The box is heavy duty die cast aluminum with baked aluminum finish and has two closure plugs and three holes. The cover comes with the gaskets. Includes parts PI385 and PI386.

PI384



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI384	Weatherproof Box and Lever Switch Cover	EA	1

Safety Plates*

Safety plates, also called nail in plates, or nail plates, install quickly and protect wire, cable and pipes that may be installed in upright wood stud walls.



PI232

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI232	Safety Plate – approximately 6"	EA	6
PI232CX	Safety Plate – approximately 6"	EA	100

BULBS

Incandescent Light Bulbs

Multi-filaments support increased bulb light. Filaments have solid nickel leads. Brass base is rust and freeze resistant. Bulbs are designed for 130 volts. Rough Service bulbs are designed for maximum vibration resistance. Toughcoat helps prevent shattering on impact for superior safety. Comes in standard pack of six.

5231



CATALOG NO.	DESCRIPTION	WATTS	UOM	ORDER MULTIPLE
5231	Rough Service Bulbs, pack of 6	75	PK	1
5232	Rough Service Bulbs, pack of 6	100	PK	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



CABLE CONNECTORS

Zinc Plated Die Cast Steel Romex Connectors*

These zinc plated die cast connectors are for use with Romex, Service, and UF Cables.

PI319



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI321	Zinc plated die cast Romex Connector, pack of 8	3/8"	1/2"	PK	1
PI320	Zinc plated die cast Romex Connector, pack of 25	3/8"	1/2"	PK	1
PI319	Zinc plated die cast Romex Connector, pack of 4	3/4"	3/4"	PK	1
PI319CX	Zinc plated die cast Romex Connector, pack of 100	3/4"	3/4"	PK	1

BX and Greenfield Connectors*

These connectors are used to terminate Flexible Metal Conduit to a knock out in a dry location box or enclosure. Zinc die cast.



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI311	Set Screw Type Connector, 25 per pack	3/8"	1/2"	EA	25
PI312	Set Screw Type Connector, 8 per pack	3/8"	1/2"	EA	8
PI322	Straight Connector, squeeze type, for armored cable and flexible conduit, 8 per pack	3/8"	1/2"	EA	8
PI315	90° Connector, 3 per pack	3/8"	1/2"	EA	3
PI341	90° Connector, 4 per pack	1/2"	1/2"	EA	4
PI340	Combination Cable Connector suitable for Romex or BX and Greenfield, 8 per pack	3/8"	1/2"	EA	8
PI318	Duplex Connector with single screw, clamp type, 2 per pack	3/8"	1/2"	EA	2

Thinwall E.M.T. Connectors*

These are used to join EMT conduit to boxes on enclosures. Zinc die cast.

PI411



CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI411	Compression Type Connectors, 8 per pack	1/2"	1/2"	EA	8
PI412	Compression Type Connectors, 8 per pack	3/4"	3/4"	EA	8
PI416	Compression Type Couplings, 8 per pack	3/4"		EA	8
PI426	Compression Type Straight Connectors for connecting E.M.T. to Liquid-Tight, 8 per pack	3/4"		EA	8
PI419	Set Screw Type Connectors, 8 per pack	1/2"	1/2"	EA	8
PI431	Set Screw Type 90° Connectors, 8 per pack	1/2"	1/2"	EA	8
PI435	Set Screw Type Offset Connectors, 8 per pack	1/2"	1/2"	EA	8

Rigid Conduit Bodies*

These bodies are Aluminum and can be use indoor or outdoor. Use to gain access to the interior of a raceway for wire pulling, splicing (with limitations as specified by the NEC), and maintenance. This item comes with cover and gasket.



PI458

CATALOG NO.	DESCRIPTION	TRADE SIZE	BODY TYPE	UOM	ORDER MULTIPLE
PI458	Includes steel cover, screws, gasket	1/2"	Back (LB)	EA	1
PI459	Includes steel cover, screws, gasket	3/4"	Back (LB)	EA	1

Liquid-Tite Connectors*

These connectors are made of zinc die cast and can be used with Flexible Metal Conduits and non metallic conduits. Zinc die cast.




PI352

CATALOG NO.	DESCRIPTION	TRADE SIZE	KNOCKOUT	UOM	ORDER MULTIPLE
PI350	Straight Liquid-Tite Connector, 2 per pack	1/2"	1/2"	EA	2
PI351	Straight Liquid-Tite Connector, 2 per pack	3/4"	3/4"	EA	2
PI352	90° Liquid-Tite Connector	1/2"	1/2"	EA	1
PI353	90° Liquid-Tite Connector	3/4"	3/4"	EA	1

CABLE TIES AND ACCESSORIES

Heavy Duty Nylon Cable Ties


Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
6265BLX	Nylon; Heavy-duty, pack of 50	14"	Black	4"	175 lb.	PK	1
6265BCX	Nylon; Heavy-duty, pack of 100	14"	Black	4"	175 lb.	PK	1
6266BLX	Nylon; Heavy-duty, pack of 50	36"	Black	11"	175 lb.	PK	1

Nylon Cable Ties


Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
6267MX	Nylon Cable Ties, pack of 1,000	4"	Natural	13/16"	18 lb.	PK	1
6261CX	Nylon Cable Ties, pack of 100	6"	Natural	1-3/8"	18 lb.	PK	1
6261BCX	Nylon Cable Ties, pack of 100	6"	Black	1-3/8"	18 lb.	PK	1
6268BL	Nylon Cable Ties, pack of 50	6"	Black	1-3/8"	30 lb.	PK	1
6268BMX	Nylon Cable Ties, pack of 1,000	6"	Black	1-3/8"	30 lb.	PK	1
6262LX	Nylon Cable Ties, pack of 50	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262CX	Nylon Cable Ties, pack of 100	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262MX	Nylon Cable Ties, pack of 1,000	7-1/2"	Natural	1-3/4"	50 lb.	PK	1
6262BLX	Nylon Cable Ties, pack of 50	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BCX	Nylon Cable Ties, pack of 100	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6262BMX	Nylon Cable Ties, pack of 1,000	7-1/2"	Black	1-3/4"	50 lb.	PK	1
6263NX	Nylon Cable Ties, pack of 25	11"	Natural	3"	50 lb.	PK	1
6263LX	Nylon Cable Ties, pack of 50	11"	Natural	3"	50 lb.	PK	1
6263CX	Nylon Cable Ties, pack of 100	11"	Natural	3"	50 lb.	PK	1
6263DX	Nylon Cable Ties, pack of 500	11"	Natural	3"	50 lb.	PK	1
6263BNX	Nylon Cable Ties, pack of 25	11"	Black	3"	50 lb.	PK	1
6263BLX	Nylon Cable Ties, pack of 50	11"	Black	3"	50 lb.	PK	1
6263BCX	Nylon Cable Ties, pack of 100	11"	Black	3"	50 lb.	PK	1
6263BDX	Nylon Cable Ties, pack of 500	11"	Black	3"	50 lb.	PK	1
60265LX	Nylon Cable Ties, pack of 50	14"	Natural	4"	50 lb.	PK	1
60265BLX	Nylon Cable Ties, pack of 50	14"	Black	4"	50 lb.	PK	1

Nylon Cable Ties with Mounting Hole


Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	MOUNTING HOLE	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
60264CX	Tie w/mtg. hole, pack of 100	#8	6"	Natural	1-3/8"	30 lb.	PK	1
60264BCX	Tie w/mtg. hole, pack of 100	#8	6"	Black	1-3/8"	30 lb.	PK	1
6264LX	Tie w/mtg. hole, pack of 50	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264CX	Tie w/mtg. hole, pack of 100	#10	7"	Natural	1-3/4"	50 lb.	PK	1
6264BLX	Tie w/mtg. hole, pack of 50	#10	7"	Black	1-3/4"	50 lb.	PK	1
6264BCX	Tie w/mtg. hole, pack of 100	#10	7"	Black	1-3/4"	50 lb.	PK	1
6264BMX	Tie w/mtg. hole, pack of 1,000	#10	7"	Black	1-3/4"	50 lb.	PK	1
60263CX	Tie w/mtg. hole, pack of 100	#10	11"	Natural	3"	50 lb.	PK	1
60263BLX	Tie w/mtg. hole, pack of 50	#10	11"	Black	3"	50 lb.	PK	1
60263BCX	Tie w/mtg. hole, pack of 100	#10	11"	Black	3"	50 lb.	PK	1

Black Nylon Cable Tie Assortment

Black ties are weather and UV resistant. Items in this section are Underwriters' Laboratories listed or recognized under the prime manufacturer's name.



CATALOG NO.	DESCRIPTION	LENGTH	COLOR	MAX. BUNDLE DIAMETER	TENSILE STRENGTH	UOM	ORDER MULTIPLE
62000AX	Assortment	7-1/2"	Black	1-3/4"	50 lb.	EA	1
		11"	Black	3"	50 lb.		

Cable Tie Mounts

Approximately 1in. square adhesive backed. These mounts can be mounted with a screw and will accept up to 75 lb. ties.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6269	Cable Tie Mounts; 1" square; adhesive backed, pack of 11	PK	1
6269LX	Cable Tie Mounts; 1" square; adhesive backed, pack of 50	PK	1
6269CX	Cable Tie Mounts; 1" square; adhesive backed, pack of 100	PK	1
6269MX	Cable Tie Mounts; 1" square; adhesive backed, pack of 1,000	PK	1



CONDUIT FITTINGS

Straps

Our zinc plated steel straps are designed to hold conduit pipe.


PI307



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI306	Straps fit 1/2" E.M.T. Conduit, pack of 20	PK	1
PI306CX	Straps fit 1/2" E.M.T. Conduit, pack of 100	PK	1
PI307	Straps fit 3/4" E.M.T. Conduit, pack of 12	PK	1
PI307CX	Straps fit 3/4" E.M.T. Conduit, pack of 100	PK	1
PI908	Straps fit 1" E.M.T. Conduit, pack of 10	PK	1
PI908CX	Straps fit 1" E.M.T. Conduit, pack of 100	PK	1
PI909LX	Straps fit 1-1/4" E.M.T. Conduit, pack of 50	PK	1
PI206	Straps for 14-2 Romex, pack of 20	PK	1

Knockout Seals and Hole Plug

PI316



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI316	For 1/2" knockouts, zinc plated steel, pack of 10	PK	1
PI317	For 3/4" knockouts, zinc plated steel, pack of 10	PK	1
ED406	Nylon Hole Plug for 3/8" hole, pack of 28	PK	1

Conduit Nipples*

PI301 is zinc die cast steel. PI303 is galvanized steel. All come with plated steel locknuts and plastic insulating bushings.



CATALOG NO.	DESCRIPTION	SIZE	CONNECTION	UOM	ORDER MULTIPLE
PI301	Conduit Nipple, pack of 2	1/2"	Offset	PK	1
PI303	Conduit Nipple, pack of 2	1/2" x 2"	Straight	PK	1

Electrical Staples

We have steel, insulated copper finish, and plastic electrical staples available.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
PI330	Plastic; for 2 conductor Romex and other NM cable conductor; 12/2-14/2 range; UV protected, pack of 50	3/8" x 1/2"	PK	1
PI332	Plastic; for 3 conductor Romex and other NM cable conductor; 12/3-14/3 range; UV protected, pack of 50	3/8" x 3/4"	PK	1
PI309	Steel; non-insulated for Romex and NM cable; 14/2-10/3 range, pack of 154	1" x 1/2"	PK	1
ED273	Insulated coppered finish; size #5, pack of 50	5/8" x 1/4"	PK	1
ED273CX	Insulated coppered finish; size #5, pack of 100	5/8" x 1/4"	PK	1

Reducing Washers

Reducing washers are for reducing knockout holes. These washers have raised flanges for a tight fit and are made of galvanized steel. PI308 reduces hole to fit appliance switch.



PI304

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI304	Reducing Washer - reduces hole from 1" to 1/2", pack of 10	PK	1
PI305	Reducing Washer - reduces hole from 1" to 3/4", pack of 10	PK	1
PI305LX	Reducing Washer - reduces hole from 1" to 3/4", pack of 50	PK	1
PI310	Reducing Washer - reduces hole from 3/4" to 1/2", pack of 28	PK	1
PI310LX	Reducing Washer - reduces hole from 3/4" to 1/2", pack of 50	PK	1
PI912	Reducing Washer - reduces hole from 2" to 3/4", pack of 5	PK	1
PI912LX	Reducing Washer - reduces hole from 2" to 3/4", pack of 50	PK	1
PI913	Reducing Washer - reduces hole from 1-1/2" to 1/2", pack of 4	PK	1
PI914	Reducing Washer - reduces hole from 1-1/2" to 3/4", pack of 4	PK	1

Conduit Nipples*

Used to connect two electrical utility boxes where room is limited. Zinc die cast steel. Comes with plated steel locknuts.



PI203

CATALOG NO.	DESCRIPTION	SIZE	CONNECTION	UOM	ORDER MULTIPLE
PI203	Conduit Nipple, pack of 6	1/2"	Straight	PK	1

Bushings and Locknuts

The locknuts and bushing are straight connectors provide excellent pullout strength and can be installed without disassembly. The compression nut ratchet prevents unintentional loosening.



PI331

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI331	Plastic "Anti-Short" Bushings for 14/2, 14/3, 12/2 BX cable, pack of 35	PK	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

GENERAL TOOLS

Devco Crimpers

Crimps insulated and non insulated terminals 22 to 10 AWG, cuts bolts #4 40 through #10 24, and strips stranded wire 22 to 10 AWG and solid wire 18 to 8 AWG. Features two precision ground wire cutters, one on the nose and the other behind the pivot point. Plastic cushion handle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5002	Devco Crimpers; plastic coated handle	EA	1

Magnetic Hex Chucks

Magnetic Hex Chucks may be used with an electric drill to drive hex washer head screws.



CATALOG NO.	DESCRIPTION	SIZE	HEX HEAD DIAMETER	LENGTH	UOM	ORDER MULTIPLE
DE13	Magnetic Hex Chuck	1/4"	7/16"	1-3/4"	EA	1
DE14	Magnetic Hex Chuck	5/16"	1/2"	1-3/4"	EA	1
DE15	Magnetic Hex Chuck	3/8"	9/16"	1-7/8"	EA	1
DE23	Magnetic Hex Chuck	1/4"	7/16"	2-9/16"	EA	1
DE24	Magnetic Hex Chuck	5/16"	1/2"	2-9/16"	EA	1
DE33**	Magnetic Hex Chuck	1/4"	7/16"	3"	EA	1

**Magnetic insert bit holder with a "C" ring retainer

Blind Rivet Tools

Heavy duty hand rivet tool that offers long handles to increase leverage and to secure the rivet in the nosepiece while the tool is in use. Powerful riveting capacity with 4 standard nosepieces to set 3/32, 1/8, 5/32, and 3/16" blind rivets.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5107	Heavy-duty tool; 4 interchangeable nose pieces to accommodate 3/32", 1/8", 5/32", 3/16" steel or aluminum rivets	EA	1

NUTS AND BOLTS

Finished Hex Nuts

The hex nuts are zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6501	Finished Hex Nuts, pack of 60	1/4" - 20	PK	1
6501CX	Finished Hex Nuts, pack of 100	1/4" - 20	PK	1
6502	Finished Hex Nuts, pack of 38	5/16" - 18	PK	1
6503	Finished Hex Nuts, pack of 25	3/8" - 16	PK	1
6503CX	Finished Hex Nuts, pack of 100	3/8" - 16	PK	1
6505	Finished Hex Nuts, pack of 11	1/2" - 13	PK	1
6505LX	Finished Hex Nuts, pack of 50	1/2" - 13	PK	1

Machine Screw Hex Nuts


The hex nuts are zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6526	Machine Screw Hex Nuts, pack of 49	#8 - 32	PK	1
6528	Machine Screw Hex Nuts, pack of 44	#10 - 24	PK	1
6500A	Assortment, 23 of each	#6-32, #8-32, #10-32	EA	1

Toggle Bolts

The toggle bolts are slotted round head machine screws with spring wings and are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	LENGTH	BOLT SIZE	HOLE SIZE	UOM	ORDER MULTIPLE
7033	Toggle Bolts, pack of 6	4"	3/16"	1/2"	PK	1
7034	Toggle Bolts, pack of 5	4"	1/4"	5/8"	PK	1
7036X	Toggle Bolts, pack of 4	4"	3/8"	1"	PK	1
7066X	Toggle Bolts, pack of 4	6"	3/8"	1"	PK	1

**NUTS AND BOLTS** cont'd**Stove Bolts**


Stove Bolts are a combination of slotted round head machine screws and finished hex nuts. They are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	LENGTH	UOM	ORDER MULTIPLE
6401	Stove Bolts, pack of 42	#10 - 24	1/2"	PK	1
6402	Stove Bolts, pack of 38	#10 - 24	3/4"	PK	1
6403	Stove Bolts, pack of 34	#10 - 24	1"	PK	1
6404	Stove Bolts, pack of 27	#10 - 24	1-1/2"	PK	1
6411	Stove Bolts, pack of 22	1/4" - 20	1/2"	PK	1
6412	Stove Bolts, pack of 20	1/4" - 20	3/4"	PK	1
6413	Stove Bolts, pack of 18	1/4" - 20	1"	PK	1
6414	Stove Bolts, pack of 15	1/4" - 20	1-1/2"	PK	1
6415	Stove Bolts, pack of 13	1/4" - 20	2"	PK	1
6416	Stove Bolts, pack of 11	1/4" - 20	2-1/2"	PK	1

Flat Washers


These washers are zinc plated steel with a USS Classification.



CATALOG NO.	DESCRIPTION	SIZE	INNER DIAMETER	OUTER DIAMETER	UOM	ORDER MULTIPLE
6701	Flat Washers (USS), pack of 160	3/16"	1/4"	9/16"	PK	1
6702	Flat Washers (USS), pack of 72	1/4"	5/16"	3/4"	PK	1
6703	Flat Washers (USS), pack of 33	5/16"	3/8"	7/8"	PK	1
6704	Flat Washers (USS), pack of 37	3/8"	7/16"	1"	PK	1
6704-2X	Flat Washers (USS), pack of 134	3/8"	7/16"	1"	PK	1
6706	Flat Washers (USS), pack of 11	1/2"	9/16"	1-3/8"	PK	1
6706-2X	Flat Washers (USS), pack of 52	1/2"	9/16"	1-3/8"	PK	1
6700AX	Assortment	All sizes included			EA	1

Fender Washers

These washers are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	INNER DIAMETER	OUTER DIAMETER	UOM	ORDER MULTIPLE
6722	Fender Washers, pack of 20	1/4"	9/32"	1-1/4"	PK	1
6722-2X	Fender Washers, pack of 92	1/4"	9/32"	1-1/4"	PK	1
6724	Fender Washers, pack of 12	3/8"	13/32"	1-1/2"	PK	1
6724-2X	Fender Washers, pack of 66	3/8"	13/32"	1-1/2"	PK	1

Motor Bolts

Motor Bolts are all thread rods made of zinc metal steel. Each Bolt includes four machine screw hex nuts.



CATALOG NO.	DESCRIPTION	SIZE	LENGTH	UOM	ORDER MULTIPLE
6109	Motor Bolts, pack of 16	#10 - 32	1-1/2"	PK	1

Hex Head Cap Screws

Hex Screw Cap Screws are made of low carbon, grade 2 steel and are USS Classified. The total thread length on these screws equal 2x diameter + 1/4in.



CATALOG NO.	DESCRIPTION	SIZE	LENGTH	UOM	ORDER MULTIPLE
6601	Hex Head Cap Screws, pack of 28	1/4" - 20	3/4"	PK	1
6602	Hex Head Cap Screws, pack of 25	1/4" - 20	1"	PK	1
6603	Hex Head Cap Screws, pack of 18	1/4" - 20	1-1/2"	PK	1
6622	Hex Head Cap Screws, pack of 15	5/16" - 18	1"	PK	1
6623	Hex Head Cap Screws, pack of 12	5/16" - 18	1-1/2"	PK	1
6641	Hex Head Cap Screws, pack of 14	3/8" - 16	3/4"	PK	1
6642	Hex Head Cap Screws, pack of 12	3/8" - 16	1"	PK	1
6643	Hex Head Cap Screws, pack of 8	3/8" - 16	1-1/2"	PK	1
6644	Hex Head Cap Screws, pack of 7	3/8" - 16	2"	PK	1
6645	Hex Head Cap Screws, pack of 5	3/8" - 16	2-1/2"	PK	1
6685	Hex Head Cap Screws, pack of 3	1/2" - 13	2-1/2"	PK	1

Medium Split Lock Washers

Spring type. These washers are made of zinc plated steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6730	Medium Split Lock Washers, pack of 95	3/16"	PK	1
6731	Medium Split Lock Washers, pack of 72	1/4"	PK	1
6732	Medium Split Lock Washers, pack of 59	5/16"	PK	1
6733	Medium Split Lock Washers, pack of 38	3/8"	PK	1

POWER CORDS AND WORK LIGHTS

Round Extension Cords*

Comes in bright orange or yellow, depending upon availability.

5225



CATALOG NO.	DESCRIPTION	WIRE	LENGTH	RATING	UOM	ORDER MULTIPLE
5225	Round Extension Cord	16/3	25'	13A/125V	EA	1
5230	Round Extension Cord	14/3	100'	13A/125V	EA	1

Trouble Lights*

These all weather lights are extra flexible with metal guards.

5200



CATALOG NO.	DESCRIPTION	WIRE	CORD LENGTH	RATING	UOM	ORDER MULTIPLE
5200	Trouble Light	16/3	25'	13A/125V	EA	1
5201	Trouble Light	16/3	50'	13A/125V	EA	1

SCREWS

Combo Head Sheet Metal Screws

These screws are used on sheet metal items.

6845



CATALOG NO.	DESCRIPTION	LENGTH	SCREW SIZE	UOM	ORDER MULTIPLE
6845	Combo Head Screws, pack of 56	3/4"	#8	PK	1
6845DX	Combo Head Screws, pack of 500	3/4"	#8	PK	1
6853	Combo Head Screws, pack of 48	1/2"	#10	PK	1
6855	Combo Head Screws, pack of 46	3/4"	#10	PK	1
6858	Combo Head Screws, pack of 26	1-1/2"	#10	PK	1
6859	Combo Head Screws, pack of 19	2"	#10	PK	1
6865	Combo Head Screws, pack of 32	3/4"	#12	PK	1
6866	Combo Head Screws, pack of 26	1"	#12	PK	1
6868	Combo Head Screws, pack of 18	1-1/2"	#12	PK	1
6876	Combo Head Screws, pack of 20	1"	#14	PK	1
6878	Combo Head Screws, pack of 15	1-1/2"	#14	PK	1

Sheet Metal Screw Assortments

6800BX and 6800HX come in a four compartment, clear plastic box.

6800HX



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6800HX	Slotted Hex Washer Head Screws: #6 x 3/8", #8 x 1/2", #8 x 3/4", #10 x 3/4", #10 x 1"	EA	1

Slotted Round Head Machine Screws – Assortments

The assortment is zinc plated steel and offers a variety of sizes.

6021



CATALOG NO.	DESCRIPTION	SIZES	LENGTHS	UOM	ORDER MULTIPLE
6021	Slotted Round Head Machine Screws, #6-32, #8-32, 1/2", 1", 2" pack of 56	#6-32, #8-32, #10-32	1/2", 1", 2"	PK	1

Self-Drilling Screw Repair Kit

These screws are used for replacements in striped holes.

6900AX



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6900AX	Contains: #12 x 3/4", #12 x 1", #14 x 3/4", #14 x 1"	EA	1

Self-Drilling Screws

Zinc plated steel. Self drilling screws drill and tap holes in one step. Hex washer heads. #8 and #10 screws are designed for use with material thickness of .035" to .110"; #12 and #14 screws are designed for use with .110" to .220" material thickness.

6943CX



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6943CX	Hex Head Self Drilling Screw, 1/4in. Head #8 x 1/2in., 100 pcs	EA	1
6945CX	Hex Head Self Drilling Screw, Zinc Plated, #8 x 3/4in., 100 pcs	EA	1
6946CX	Hex Head Self Drilling Screw, 1/4in. Head #8 x 1in, 100 pcs	EA	1
6953CX	Hex Washer Head Self Drilling Screws 5/16in. Head #10 x 1/2in 100 pcs	EA	1
6955CX	Hex Head Self Drilling Screw, 5/16in. Head #10 x 3/4in., 100 pcs	EA	1
6956CX	Hex Washer Head Self Drilling Screws 5/16in. Head #10 x 1in 100 pcs	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



SPECIALTY FASTENERS

Nylon Cable Clamps

These cable clamps are perfect for securing wire or pipes.

5384



CATALOG NO.	DESCRIPTION	FITS PIPE OUTER DIAMETER	THICKNESS	WIDTH	UOM	ORDER MULTIPLE
5381	Nylon Cable Clamps, pack of 54	1/8"	.050"	3/8"	PK	1
5382	Nylon Cable Clamps, pack of 48	1/4"	.050"	3/8"	PK	1
5383	Nylon Cable Clamps, pack of 41	3/8"	.050"	3/8"	PK	1
5384	Nylon Cable Clamps, pack of 35	1/2"	.050"	3/8"	PK	1
5385	Nylon Cable Clamps, pack of 21	5/8"	.060"	1/2"	PK	1
5380AX	Assortment	1/8" - 1"			EA	1

Pipe Hanging Strap

Non plated Steel Pipe hanging Strap is perfect for hanging pipes, fastening faucets and valves, as well as repair jobs.

PI335



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
PI335	Pipe Hanging Strap; 28 gauge AWG	3/4" x 10'	EA	1

Nylon Nut and Washer

Nylon Bolts and washers are suitable where non conductivity, corrosion resistance, and cost are important considerations.

6515



CATALOG NO.	DESCRIPTION	WASHER DIAMETER INNER	WASHER DIAMETER OUTER	THREAD SIZE	UOM	ORDER MULTIPLE
6515	Nylon Nut and Washer, pack of 4	1/2"	3/4"	1/2"-13	PK	1

Hose Clamps

Hose Clamps have stainless steel housings and bands. The screws are plated steel and have slotted hex heads allowing a socket wrench, nut driver, or screwdriver to be used.

HC5416




CATALOG NO.	DESCRIPTION	SAE NO.	SAE DIAMETER RANGE (in.)	APPROX. RANGE (in.)	UOM	ORDER MULTIPLE
HC6202	Hose Clamps, pack of 6	*	N/A	1/4 to 5/8	PK	1
HC6203	Hose Clamps, pack of 6	6	.44 - .78	5/16 to 7/8	PK	1
HC5410	Hose Clamps, pack of 6	10	.56 - 1.06	9/16 to 1-1/8	PK	1
HC5410X	Hose Clamps, pack of 10	10	.56 - 1.06	9/16 to 1-1/8	PK	1
HC5416	Hose Clamps, pack of 6	16	.81 - 1.50	3/4 to 1-1/2	PK	1
HC5416X	Hose Clamps, pack of 10	16	.81 - 1.50	3/4 to 1-1/2	PK	1
HC5420	Hose Clamps, pack of 6	20	.81 - 1.75	13/16 to 1-3/4	PK	1
HC5420X	Hose Clamps, pack of 10	20	.81 - 1.75	13/16 to 1-3/4	PK	1
HC5424	Hose Clamps, pack of 6	24	1.06 - 2.00	1-1/16 to 2	PK	1
HC5436	Hose Clamps, pack of 4	36	1.81 - 2.75	1-1/2 to 2-3/4	PK	1
HC5436X	Hose Clamps, pack of 10	36	1.81 - 2.75	1-1/2 to 2-3/4	PK	1

Nylon Rods

These nylon rods can be used with load bearing capability. Used for smaller machined parts, such as electrical insulators and food contact parts.

6113



CATALOG NO.	DESCRIPTION	DIAMETER	THREADS (in.)	LENGTH	UOM	ORDER MULTIPLE
6113	Nylon Rods; All-Thread, pack of 4	3/8"	16	2'	PK	1
6115	Nylon Rods; All-Thread, pack of 2	1/2"	13	2'	PK	1

Cotter Pins

Cotter Pins provide smooth locking between two parts. This set includes an assortment of regular Cotter Pins with extended prongs.

6011



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6011	Cotter Pins: 1/16" x 1-1/2"; 3/32" x 1-1/2"; 1/8" x 1-1/2", pack of 51	PK	1

SPECIALTY FASTENERS cont'd

Set Screws

Set Screws have cup points and hex socket heads. Class 3A threads. Made of heat treated alloy steel.



CATALOG NO.	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE
6002	Set Screws, pack of 33	#8-32 x 3/16"	PK	1
6003	Set Screws, pack of 25	#10-32 x 3/16"	PK	1
6004	Set Screws, pack of 27	1/4"-28 x 1/4"	PK	1
6005	Set Screws, pack of 27	1/4"-20 x 1/4"	PK	1
6006	Set Screws, pack of 19	5/16"-18 x 5/16"	PK	1
6007	Set Screws, pack of 14	3/8"-16 x 3/8"	PK	1
6000	Large Assortment; course thread	1/4"-20; 5/16"-18; 3/8"-16	EA	1
6001	Small Assortment; fine thread	#8-32; #10-32; 1/4"-28	EA	1

Motor Shaft Key Assortments

You can use choose from either a large assortment or a small assortment. The keys are made of cold rolled 1018 steel and are zinc plated.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6101	Small Assortment includes: 1/8" x 1/8" x 1-3/16"; 3/16" x 3/16" x 1-3/16"; 3/16" x 1/4" x 1-3/16"; 1/4" x 1/4" x 1-3/4"	EA	1
6102	Large Assortment includes: 1/4" x 1/4" x 1-3/4"; 5/16" x 5/16" x 3"; 3/8" x 3/8" x 3	EA	1

SPECIALTY FITTINGS

Grease Fittings

Case hardened steel fittings plated with yellow dip chromate and built-in ball checks. Assortment available in clear plastic box.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6311	Grease Fittings: 1/4"-28 Tapered Thread; straight, pack of 8	PK	1
6312	Grease Fittings: 1/8" Pipe Thread; straight, pack of 5	PK	1
6321	Grease Fittings: 1/4"-28 Tapered Thread; 90°, pack of 3	PK	1
6322	Grease Fittings: 1/8" Pipe Thread; 90°, pack of 3	PK	1
6310X	Assortment includes: 6311, 6312, 6321, 6322	EA	1

STORAGE CONTAINERS

Metal Parts Boxes

Metal Parts Boxes are prime cold rolled steel with baked gray enamel finish. The finish is rust and acid resistant. Each box comes with high impact plastic tray, positive pull down catch, and stick back parts labels for lid interiors.



CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8200M	Metal Parts Box	21	13-3/8" x 9-1/4" x 2"	EA	1
8220M	Metal Parts Box	24	18" x 12" x 3"	EA	1

Satchel Style Case

Parts box made from rugged copolymer material with high impact translucent lid and handle on the side. 15 removable dividers allow up to 24 compartments.



CATALOG NO.	DESCRIPTION	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8233	Satchel Style Case	Up to 24	15" x 11-3/4" x 2-1/2"	EA	1



STORAGE CONTAINERS cont'd

Styrene Parts Boxes

This box is ideal for holding your different sized nuts and bolts along with your additional bits. It can be stored in a tool box as well.



CATALOG NO.	DESCRIPTION	COLOR	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8207	Styrene Parts Box	Clear	4	4-7/8" x 3-1/4" x 1-1/8"	EA	1
8208	Styrene Parts Box	Clear	6	4-7/8" x 3-1/4" x 1-1/8"	EA	1

Polypropylene Parts Boxes

This box is ideal for holding your different sized nuts and bolts along with your additional bits. It can be stored in a tool box as well.



CATALOG NO.	DESCRIPTION	COLOR	NO. OF COMPARTMENTS	DIMENSIONS (L x W x D)	UOM	ORDER MULTIPLE
8201	Polypropylene Parts Box	Yellow	13	11" x 6-3/4" x 1-1/4"	EA	1
8201C	Polypropylene Parts Box Translucent		13	11" x 6-3/4" x 1-1/4"	EA	1
8202	Polypropylene Parts Box	Yellow	18	11" x 6-3/4" x 1-1/4"	EA	1
8203	Polypropylene Parts Box	Yellow	24	11" x 6-3/4" x 1-1/4"	EA	1
8203C	Polypropylene Parts Box Translucent		24	13-1/8" x 9" x 2-5/8"	EA	1

TAPES

Tape

Vinyl electrical tape. Part 5247 holds up to 7 pounds per square inch when attached to steel surface.



CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE
5255	Vinyl Electrical Tape	3/4" x 60'	EA	1

Teflon® Tape

This PTFE Tape is made of non toxic, pure white PTFE. The tape can be used with chemicals, solvents, oxygen, and on food lines. The product can withstand up to 2000 psi of pressure.



CATALOG NO.	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE
5246	Teflon® Thread Seal Tape	1/2" x 520"	EA	1

TESTERS, LEADS, CLIPS, FUSES

Clips

The clips are alligator clips and have vinyl red and black insulators.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5033	Steel Alligator Clips for use with test probes (.075"-.080"); 1-31/32" long; jaws open 5/16" max.; pack of 2 red, 2 black, 4 clips	PK	1
5035	Copper Alligator Clips; 1-31/32" long; jaws open 5/16" max.; crimpers slotted screw connection, pack of 2 red, 2 black, 4 clips	PK	1
5036	Steel Test Clips; 20A, 2-7/16" long; jaws open 5/8" max.; crimpers slotted screw connection, pack of 1 red, 1 black, 2 clips	PK	1

Test Leads

These are replacement leads.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5031	Low Voltage Test Leads; eight 22" long, color-coded leads with fully insulated alligator clips	EA	1
5041	Small Hook Type Low Voltage Test Leads; retractable hooks, 36" thermoplastic 22 gauge wire, nylon body/plunger, red/black	EA	1
5042	Large Hook Type Low Voltage Test Leads; retractable hooks, 36" PVC insulated 20 gauge wire, nylon body/plunger, red/black	EA	1
5046	Flexible Test Leads; steel alligator clips with vinyl red and black insulators; 36" 20 gauge wire; extremely flexible	EA	1

Blade (Auto) Fuses

These fuses are used to protect circuits in the wiring harness that are usually found under the hood, in a fuse panel or supplementary panel near the battery. MAX fuses are used in domestic and import vehicles.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED-AT3	Blade Fuse – 3 Amp – Purple, pack of 10	PK	1
ED-AT5	Blade Fuse – 5 Amp – Tan, pack of 10	PK	1

Dual Element Fuses – 250V

Provides time delay for temporary over-current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED-CR15	Dual Element Fuse – 15 Amps, pack of 2	PK	1
ED-CR20	Dual Element Fuse – 20 Amps, pack of 2	PK	1
ED-CR25	Dual Element Fuse – 25 Amps, pack of 2	PK	1
ED-CR30	Dual Element Fuse – 30 Amps, pack of 2	PK	1
ED-CR35	Dual Element Fuse – 35 Amps, pack of 2	PK	1
ED-CR40	Dual Element Fuse – 40 Amps, pack of 2	PK	1
ED-CR45	Dual Element Fuse – 45 Amps, pack of 2	PK	1
ED-CR50	Dual Element Fuse – 50 Amps, pack of 2	PK	1
ED-CR60	Dual Element Fuse – 60 Amps, pack of 2	PK	1

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

WIRE

TFFN Stranded Hook-Up Wire*


Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
60331B	Black, pack of 50'	18	16	.09"	48'	PK	1
60331BE	Blue, pack of 50'	18	16	.09"	48'	PK	1
60331R	Red, pack of 50'	18	16	.09"	48'	PK	1
60331W	White, pack of 50'	18	16	.09"	48'	PK	1
6332B	Black, pack of 50'	16	26	.10"	48'	PK	1
6332G	Green, pack of 50'	16	26	.10"	48'	PK	1
6332R	Red, pack of 50'	16	26	.10"	48'	PK	1
6332W	White, pack of 50'	16	26	.10"	48'	PK	1

THHN Stranded Hook-Up Wire*

Packaged in handy dispenser bag. Polyvinyl chloride insulation. Wire rating: 600V, 90°C. Insulation: oil resistant nylon coating.



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
6333B	Black, pack of 50'	14	19	.11"	48'	PK	1
6333G	Green, pack of 50'	14	19	.11"	48'	PK	1
6333R	Red, pack of 50'	14	19	.11"	48'	PK	1
6333W	White, pack of 50'	14	19	.11"	48'	PK	1
6334B	Black, pack of 50'	12	19	.13"	48'	PK	1
6334G	Green, pack of 50'	12	19	.13"	48'	PK	1
6334R	Red, pack of 50'	12	19	.13"	48'	PK	1
6334W	White, pack of 50'	12	19	.13"	48'	PK	1
6335B	Black, pack of 50'	10	19	.17"	48'	PK	1
6335G	Green, pack of 50'	10	19	.17"	48'	PK	1
6335R	Red, pack of 50'	10	19	.17"	48'	PK	1
6335W	White, pack of 50'	10	19	.17"	48'	PK	1
6360B	Black, pack of 50'	8	19	.22"	25'	PK	1
6360R	Red, pack of 50'	8	19	.22"	25'	PK	1
6360W	White, pack of 50'	8	19	.22"	25'	PK	1


*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



WIRE cont'd

Thermostat Wire*

Thermoplastic insulated, jacketed wire for low voltage applications. Conductors are solid copper, individually insulated and color coded.



CATALOG NO.	DESCRIPTION	CONDUCTORS	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6331	Thermostat Wire, pack of 40'	2	20	40'	PK	1
6336	Thermostat Wire, pack of 40'	3	20	40'	PK	1
6330-4	Thermostat Wire, pack of 40'	4	20	40'	PK	1
6337	Thermostat Wire, pack of 40'	5	20	40'	PK	1
6330-6	Thermostat Wire, pack of 40'	6	20	40'	PK	1
6338	Thermostat Wire, pack of 40'	8	20	40'	PK	1
6339	Thermostat Wire, pack of 25'	10	20	25'	PK	1
6339XL	Thermostat Wire, pack of 40'	10	20	40'	PK	1

High Temperature Range Wire*


200°C glass braided, three conductor twisted wire. 600V; silicone rubber insulated. This product also contains a crimper.



CATALOG NO.	COLOR	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6383-35	Black, Red, and White, pack of 5'	14	5'	PK	1
6383-325	Black, Red, and White, pack of 25'	14	25'	PK	1
6384-35	Black, Red, and White, pack of 5'	12	5'	PK	1
6384-325	Black, Red, and White, pack of 25'	12	25'	PK	1

SJTO Service Cord*

Features stranded bare copper, PVC insulation; PVC jacket. Cord is oil resistant. Cords have 3 individually insulated conductors. Ratings: 300V; 60°C.



CATALOG NO.	DESCRIPTION	WIRE GAUGE	LENGTH	UOM	ORDER MULTIPLE
6340	SJTO Service Cord, pack of 12'	16	12'	PK	1
6341	SJTO Service Cord, pack of 20'	16	20'	PK	1
6342	SJTO Service Cord, pack of 12'	14	12'	PK	1
6343	SJTO Service Cord, pack of 20'	14	20'	PK	1

Stranded High Temperature Wire*

Thermoplastic equipment insulated wire. CSA listed at 105°C; 600V. Insulation thickness: .03". MTW/AWM/TEW



CATALOG NO.	COLOR	GAUGE	STRANDS	O.D.	LENGTH	UOM	ORDER MULTIPLE
6361B	Black, pack of 48'	18	16	.113"	48'	PK	1
6361R	Red, pack of 48'	18	16	.113"	48'	PK	1
6361W	White, pack of 48'	18	16	.113"	48'	PK	1
6362B	Black, pack of 48'	16	26	.125"	48'	PK	1
6362R	Red, pack of 48'	16	26	.125"	48'	PK	1
6362W	White, pack of 48'	16	26	.125"	48'	PK	1
6363B	Black, pack of 48'	14	19	.139"	48'	PK	1
6363R	Red, pack of 48'	14	19	.139"	48'	PK	1
6363W	White, pack of 48'	14	19	.139"	48'	PK	1
6364B	Black, pack of 48'	12	19	.158"	48'	PK	1
6364R	Red, pack of 48'	12	19	.158"	48'	PK	1
6364W	White, pack of 48'	12	19	.158"	48'	PK	1
6365B	Black, pack of 48'	10	19	.182"	48'	PK	1
6365R	Red, pack of 48'	10	19	.182"	48'	PK	1

WIRING DEVICES

Thermoplastic Handle Plug*

This plug is a standard grade with flexible spring prongs and is furnished with a face washer. This product's rating is a 15A 125V and also contains a crimper.



CATALOG NO.	DESCRIPTION	MAX. CORD DIAMETER	POLES	WIRES	MATERIAL	UOM	ORDER MULTIPLE
ED179	Handle Plug	.406"	2	2	Thermoplastic	EA	2

Grounding Rubber Handle Plug*

The rubber back design allows for sure grip and protection against dirt and moisture entry. This plug is designed to operate in the widest possible temperature ranges.



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED1703	Grounding Handle Plug	.25"-.60"	2	3	20A-250V	EA	1
ED1709	Grounding Handle Plug	.25"-.60"	2	3	15A-125V	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

Tandem Grounding Rubber Handle Plug*

The rubber back design allows for sure grip and protection against dirt and moisture entry. This plug is designed to operate in the widest possible temperature ranges

ED1711



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED1711	Tandem Handle Plug	.25"-.60"	2	3	15A-250V	EA	1

Armored Plug*

This plug has a round dead front and is vinyl enclosed.

ED2867



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED2867	Armored Plug	.25"-.625"	2	3	15A-125V	EA	1

Right Angle Plug*

Our right angle plug is ergonomically designed fluted body with radial gripping ridge creates an ideal surface for gripping and pulling.

ED4409



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED4409	Right Angle Plug	.25"-.655"	2	3	20A-125V	EA	1
ED4509	Right Angle Plug	.25"-.655"	2	3	20A-250V	EA	1
ED4867	Right Angle Plug	.25"-.655"	2	3	15A-125V	EA	1

Rubber Connector*

This is a standard grade rubber connector with a 3 pole opening.

ED252



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED252	Rubber Connector	.25"-.60"	2	3	15A-125V	EA	1

Armored Connector*

The Armor Connector is ideal for shops, garages, and heavier duty work areas. Vinyl enclosed.

ED2887



CATALOG NO.	DESCRIPTION	FITS CORD DIAMETER	POLES	WIRES	RATING	UOM	ORDER MULTIPLE
ED2887	Armored Connector	.225"-.60"	2	3	15A-125V	EA	1

Ground Adapter*

This adapter is polarized with 2 pole to 3 wire grounding. The body is made of polypropylene.

ED419



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
ED419	Ground Adapter	15A-125V	EA	2

Triple Outlets*

These outlets are polarized and are made of high impact resistant plastic.

5223



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
5223	Heavy duty, 2 pole, 3 wire	15A-125V	EA	1

Power Supply Replacement Cords*

For power tools or appliances. Black vinyl cord is flexible in very cold environments. Wire type is SJEW-A.

5240



CATALOG NO.	DESCRIPTION	WIRE	RATING	LENGTH	UOM	ORDER MULTIPLE
5240	Black Replacement Cord	16/3	13A/125V	10'	EA	1
5242	Black Replacement Cord	14/3	15A/125V	10'	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



WIRING DEVICES cont'd

Receptacles*

Our receptacles are available in either singles or duplexes. This is a 2 pole, 3 wire product with ground included. Standard Grade.

ED1877



CATALOG NO.	DESCRIPTION	RATING	COLOR	UOM	ORDER MULTIPLE
ED1876	Single Receptacle	20A-250V	Brown	EA	1
ED1876-I	Single Receptacle	20A-250V	Ivory	EA	1
ED1877	Single Receptacle	20A-125V	Brown	EA	1
ED270**	Duplex Receptacle	15A-125V	Brown	EA	1
ED270-I**	Duplex Receptacle	15A-125V	Ivory	EA	1
ED877	Duplex Receptacle	20A-125V	Brown	EA	1

**Standard Grade

Metal Bat Handle Toggle Switches*

Features black phenolic plastic case; brass terminals; steel and zinc chromate frame and support; all other external parts are brass/bright nickel. These heavy duty toggle switches have screw terminals. Part ED447 has an "ON-OFF" face plate.

Specifications: 10A/277V-20A/125V AC

Single Pole: 3/4HP 125-250V AC

Double Pole: 1-1/2HP 125-250V AC

ED447



CATALOG NO.	DESCRIPTION	SEQUENCE	CIRCUIT	UOM	ORDER MULTIPLE
ED447	Bat Handle Toggle Switch	ON-OFF	Single Pole, Single Throw	EA	1
ED453	Bat Handle Toggle Switch	ON-ON	Double Pole, Double Throw	EA	1
ED454	Bat Handle Toggle Switch	ON-ON	Single Pole, Double Throw	EA	1
ED455	Bat Handle Toggle Switch	ON-OFF	Double Pole, Single Throw	EA	1
ED468	Bat Handle Toggle Switch	ON-OFF-ON	Single Pole, Double Throw	EA	1
ED494	Bat Handle Toggle Switch	ON-OFF-ON	Double Pole, Double Throw	EA	1

Toggle Switch with Neon Pilot Light Combination Device*

Switch: 15A-120V AC

Neon Pilot Light: 1/25W, 120V AC

ED277



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED277	Toggle Switch with Neon Pilot Light - Brown Body	EA	1
ED277-I	Toggle Switch with Neon Pilot Light - Ivory Body	EA	1

Utility Fuse Outlets*

This is designed to break up electrical surges on equipment.

PI381



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI381	Utility Fuse Outlet and Switch with Cover; 1/2HP-125V AC only; galvanized steel construction	EA	1

Toggle Switch and Receptacle Combination Device*

This device is a single pole switch with 15A 120V AC. The receptacle is 15A 125V AC and it is a 2 pole, three wire grounding.

ED5225



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED5225	Toggle Switch and Receptacle - Brown Body	EA	1

Toggle Switches*

Our toggle switch is a silent switch with ground included. Standard Grade.

ED1232



ED1301-I

CATALOG NO.	DESCRIPTION	RATING	COLOR	UOM	ORDER MULTIPLE
ED1240-2	Single Pole	15A-120/277V AC	Brown	EA	1
ED1238	Single Pole	20A-120/277V AC	Brown	EA	1
ED1301**	Single Pole	15A-120V AC	Brown	EA	1
ED1301-I**	Single Pole	15A-120V AC	Ivory	EA	1
ED1262-2	Double Pole	15A-120/277V AC	Brown	EA	1
ED1262-2I	Double Pole	15A-120/277V AC	Ivory	EA	1
ED1232	Double Pole	30A-120/277V AC	Brown	EA	1

**Standard Grade

Porcelain Outlet Box Lampholders*

Features one-piece pull chain. Two screw terminals, 2 pole, 2 wire. 4-1/2" outer diameter. These lamp holders fit 3-1/4" and 4" boxes. Rating: Lampholder: 660W/125V. Outlet: 15A/125V.


ED9726



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED9726	Porcelain Outlet Box Lampholder - U ground outlet	EA	1

Fuse Holders

Used to mount and protect fuses, fuse holders also enable fuses to be changed quickly and easily. Fuse holders are used in a variety of applications, including consumer electronics, industrial, telecom and datacom, automotive, and many others.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EM480	In-Line Fuse Holder for use with 1-1/4 x 1/4" fuses up to 20 amps, 32 volts, 15" lead; 14 gauge red vinyl insulated wire	EA	1
EM484	Self-Stripping Fuse Holder mates with blade-type fuse .205 x .025". 18-14 AWG. Size: 1.37" L x .44" H x .95" W Max. Insulation Outer Diameter: .145"	EA	2

Vinyl Grommet Assortment Packs

These grommets exhibit high dielectric strength and are oil, ozone, and UV resistant.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ED320	General Assortment – contains all grommet sizes	EA	1

Heat Shrink Tubing*

Heat Shrink Tubing is made of flame-retardant polyolefin. Thin walled, all purpose tubing. Rated 600V, 125°C. 2500 volts/mil. dielectric strength. Inert to fungus. Virtually unaffected by corrosives, common fluids, and solvents. Pieces are 6" in length.



CATALOG NO.	COLOR	INNER DIAMETER MAX SUPPLIED	MIN. RECOVERED	UOM	ORDER MULTIPLE
63076B	Black, pack of 10	3/8"	3/16"	PK	1
63077B	Black, pack of 10	1/2"	1/4"	PK	1
63079B	Black, pack of 10	1"	1/2"	PK	1

Heat Shrink Tubing Assortments*

Heat Shrink Tubing is made of flame-retardant polyolefin. Thin walled, all purpose tubing. Rated 600V, 125°C. 2500 volts/mil. dielectric strength. Inert to fungus. Virtually unaffected by corrosives, common fluids, and solvents. Pieces are 6" in length.



CATALOG NO.	COLOR	INNER DIAMETER MAX SUPPLIED	MIN. RECOVERED	UOM	ORDER MULTIPLE
6370	Black & White, pack of 12	1/8", 1/4"	1/16", 1/8"	PK	1
6371	Black & White, pack of 7	1/8", 1/4", 3/8"	1/16", 1/8", 3/16"	PK	1
63070	Black, pack of 3	3/8" – 1/2"	3/16" – 1/4"	PK	1

6180 Series Terminal Blocks*

These terminal blocks are constructed of high barrier thermoplastic are rated 20A 250V.



CATALOG NO.	DESCRIPTION	NO. OF POSITIONS	LENGTH (in.)	WIDTH (in.)	SCREW SIZE	MAX. WIRE SIZE	UOM	ORDER MULTIPLE
6182	Terminal Block	4	2.16	.88	6-32	22-14	EA	1
6183	Terminal Block	6	2.91	.88	6-32	22-14	EA	1
6184	Terminal Block	8	3.66	.88	6-32	22-14	EA	1
6185	Terminal Block	10	4.41	.88	6-32	22-14	EA	1
6186	Terminal Block	12	5.16	.88	6-32	22-14	EA	1
6187	Terminal Block	14	5.91	.88	6-32	22-14	EA	1

6190 Series Terminal Blocks*

These terminal blocks are constructed of phenolic 9/16in. centers. They are rated 30A 600V.



CATALOG NO.	DESCRIPTION	NO. OF POSITIONS	LENGTH (in.)	WIDTH (in.)	SCREW SIZE	MAX. WIRE SIZE	UOM	ORDER MULTIPLE
6192	Terminal Block	4	3.22	1.31	8-32	14-12	EA	1
6193	Terminal Block	6	4.34	1.31	8-32	14-12	EA	1
6194	Terminal Block	8	5.47	1.31	8-32	14-12	EA	1
6195X	Terminal Block	10	6.59	1.31	8-32	14-12	EA	1

Terminal Block Jumpers*

These jumpers connect two positions on a terminal block and are made of nickel plated brass.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6278CX	Jumpers for Terminal Block 6180 Series, pack of 100	PK	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.



WIRING DEVICES cont'd

Indicator Lights

Terminals are tin plated brass. Wire leads are 22 AWG, 4.4–4.8" long, 1/2" stripped. Mounting will snap-fit into .500–.505 diameter hole in .020–.100" thick panels.



CATALOG NO.	LENS COLOR	LENS MATERIAL	VOLTAGE	BULB TYPE	UOM	ORDER MULTIPLE
ED600	Red, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED601	Green, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED602	Amber, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED603	Blue, pack of 2	Polycarbonate	28V	Incandescent	PK	1
ED610	Red, pack of 2	Nylon	105–125V AC	Neon	PK	1
ED611	Green, pack of 2	Polycarbonate	105–125V AC	Neon**	PK	1
ED612	Amber, pack of 2	Nylon	105–125V AC	Neon	PK	1
ED613	Blue, pack of 2	Polycarbonate	105–125V AC	Neon†	PK	1
ED620	Red, pack of 2	Polycarbonate	208–250V AC	Neon	PK	1
ED621	Green, pack of 2	Polycarbonate	208–250V AC	Neon**	PK	1

Standard Wire Connectors*

Connectors are color coded with spring inserts. Heat resistant (105°C) thermoplastic. Connectors are for copper to copper connections. Parts 6294 and 6296 can connect aluminum to aluminum and copper to aluminum (dry locations only).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6291	Mini Gray Standard Wire Connectors, pack of 29	PK	1
6291CX	Mini Gray Standard Wire Connectors, pack of 100	PK	1
6292	Tiny Blue Standard Wire Connectors, pack of 25	PK	1
6292CX	Tiny Blue Standard Wire Connectors, pack of 100	PK	1
6293	Small Orange Standard Wire Connectors, pack of 20	PK	1
6293CX	Small Orange Standard Wire Connectors, pack of 100	PK	1
6294	Medium Yellow Standard Wire Connectors, pack of 18	PK	1
6294CX	Medium Yellow Standard Wire Connectors, pack of 100	PK	1
6296	Large Red Standard Wire Connectors, pack of 12	PK	1
6296CX	Large Red Standard Wire Connectors, pack of 100	PK	1
6298	X-Large Gray Standard Wire Connectors, pack of 6	PK	1
6298LX	X-Large Gray Standard Wire Connectors, pack of 50	PK	1
6295X	Assortment: Includes 6291, 6292, 6293, 6294, 6296	EA	1

Aluminum Solderless Lugs*

Our aluminum solder less lug are made from high strength aluminum alloy. These lugs are suitable for use with either copper or aluminum conductors.



CATALOG NO.	DESCRIPTION	WIRE RANGE	AMP RATING	UOM	ORDER MULTIPLE
P1221	Small Lug for aluminum or copper wire, pack of 6	4-14	2	PK	1
P1222	Large Lug for aluminum or copper wire, pack of 6	2-14	2	PK	1

Indicator Lights*

Terminals are tin plated brass. Wire leads are 22 AWG, 4.4–4.8" long, 1/2" stripped. .31" minimum diameter mounting.



CATALOG NO.	LENS COLOR	LENS MATERIAL	VOLTAGE	BULB TYPE	UOM	ORDER MULTIPLE
ED710	Red, pack of 2	Polycarbonate	105–125V AC	Neon	PK	1

Winged Wire Connectors*

Durable thermoplastic material. Flame retardant, abrasion resistant, non porous, and non corrosive. Expandable spring grips into the wire and adjusts itself to the wire size and shape so pre twisting is unnecessary. Even during temperature changes, they resist vibrations and retain holding power. Parts 8284 and 8286 are for use with copper to copper, aluminum to aluminum, and copper to aluminum (dry locations only).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
8284	Small Yellow Winged Wire Connectors, pack of 18	PK	1
8284CX-B	Small Yellow Winged Wire Connectors, pack of 100	PK	1
8286	Medium Red Winged Wire Connectors, pack of 14	PK	1
8286CX-B	Medium Red Winged Wire Connectors, pack of 100	PK	1
8282LX	X-Large Blue Winged Wire Connectors, pack of 50	PK	1

-B indicates boxed product. All other catalog numbers are poly bagged.

Porcelain Wire Connectors*

For high temperature applications over 105°C (300 volts maximum). For stranded copper connections only.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4293	Small White Porcelain Wire Connectors, pack of 17	PK	1
4293CX	Small White Porcelain Wire Connectors, pack of 100	PK	1
4294	Medium White Porcelain Wire Connectors, pack of 15	PK	1
4294CX	Medium White Porcelain Wire Connectors, pack of 100	PK	1
4296	Large White Porcelain Wire Connectors, pack of 13	PK	1
4296CX	Large White Porcelain Wire Connectors, pack of 100	PK	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

**Neon bulb incorporates G2B lamp and resistor.

† Neon bulb incorporates T2B lamp and resistor.

Electrolytic Copper Solderless Lugs*

Our solder less lugs are manufactured from high strength pure electrolytic copper to insure both maximum strength and conductivity.

PI226


CATALOG NO.	DESCRIPTION	WIRE RANGE	AMP RATING	UOM	ORDER MULTIPLE
PI226	Small Lug for copper wire, pack of 6	10-14	25	PK	1
PI227	Medium Lug for copper wire, pack of 6	6-14	35-50	PK	1
PI228	Large Lug for copper wire, pack of 6	4-14	70	PK	1

Split Bolt Connectors*

These connectors are made of silicone bronze and are designed for copper use only.

PI327


CATALOG NO.	DESCRIPTION	MAX. SOLID WIRE	MAX. STRANDED WIRE	UOM	ORDER MULTIPLE
PI326	Split Bolt Connector, pack of 3	10	12	PK	1
PI327	Split Bolt Connector, pack of 3	8	8	PK	1
PI328	Split Bolt Connector, pack of 3	6	7	PK	1
PI929	Split Bolt Connector, pack of 3	4	5	PK	1

Pigtails

The wire has a #10 spade on one end and a 10 32 x 3/8in. slotted round head screw on the other. This allows for easy positioning in the outlet box.

PI337-3


CATALOG NO.	DESCRIPTION	WIRE LENGTH	WIRE GAUGE	WIRE TYPE	UOM	ORDER MULTIPLE
PI337-3	Pigtails, pack of 5	8"	14	Stranded	PK	1

Ground Fitting Clamp*

A ground fitting clamp is ideal for surface mounting small amounts of electrical wiring or communication cables.

PI237


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PI237	For 8, 6, 4 bare grounding wire; fits 1/2"-1" pipe	EA	1

Cable Markers

Cable markers come in books of 450 markers with matching terminal markers. Markers are mounted on dispenser cards in the book. Cable markers are suitable for above and below ground applications. Books are made of vinyl impregnated cloth that resists moderate amounts of dirt, oil and heat. The blank Write-On Markers (WM1014) are made of durable vinyl film that resists water, oils, and fungus. They can also withstand extremes in temperature.


WM1002


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WM1002	Alpha-Numeric Cable Marker Book; contains 10 each: A-Z, 0-15, +, -, /	EA	1
WM1003	Numeric Cable Marker Book; contains 10 each: 1-45	EA	1
WM1009	Line and Terminal Cable Marker Book; contains 45 each: 1, 2, 3, A, B, C; contains 30 each: T1, T2, T3, L1, L2, L3	EA	1
WM1014	180 Blank Write-On Markers, 1/2" x 1-1/2"	EA	1

*Items in this section are Underwriter's Laboratories listed or recognized under the prime manufacturer's name.

Do **MORE** with **DEVCO**®

DEVCO products help you do even more for your customers. Offering a broad selection of the parts your contractors need to finish the job, DEVCO helps you provide them all the finishing touches they need for any project. So stock up today and do more with DEVCO.




ELECTRICAL

Bearings.....	133
Capacitors.....	138-140
Compressor Heaters	147
Conduit, Fittings, Cable	136-137
Contactors.....	141-142
DiversiTech Electrical Disconnects.....	135
Electrical Supplies	148-150
Electrical Tapes.....	150
Fan Centers.....	143
Fuses	144-145
Hard Start Kits	140
Monitors.....	146
Motor Brackets	133
Motor Run Capacitors (USA Made).....	137
Motors	132-133
Relays.....	143
Square D® Electrical Disconnects.....	135
Stranded Copper THHN Wire	154-155
Surge Protectors	135
Terminals, Connectors.....	151
Thermal Controls	152
Thermostat Guards	153
Thermostat Wire	154
Thermostats	153
Time Delays	145
Transformers	142
Whips	134
Wire Connectors.....	155-156
Wire/Cable Ties, Mounts, Clamps	156-157



A/C Disconnect Switches

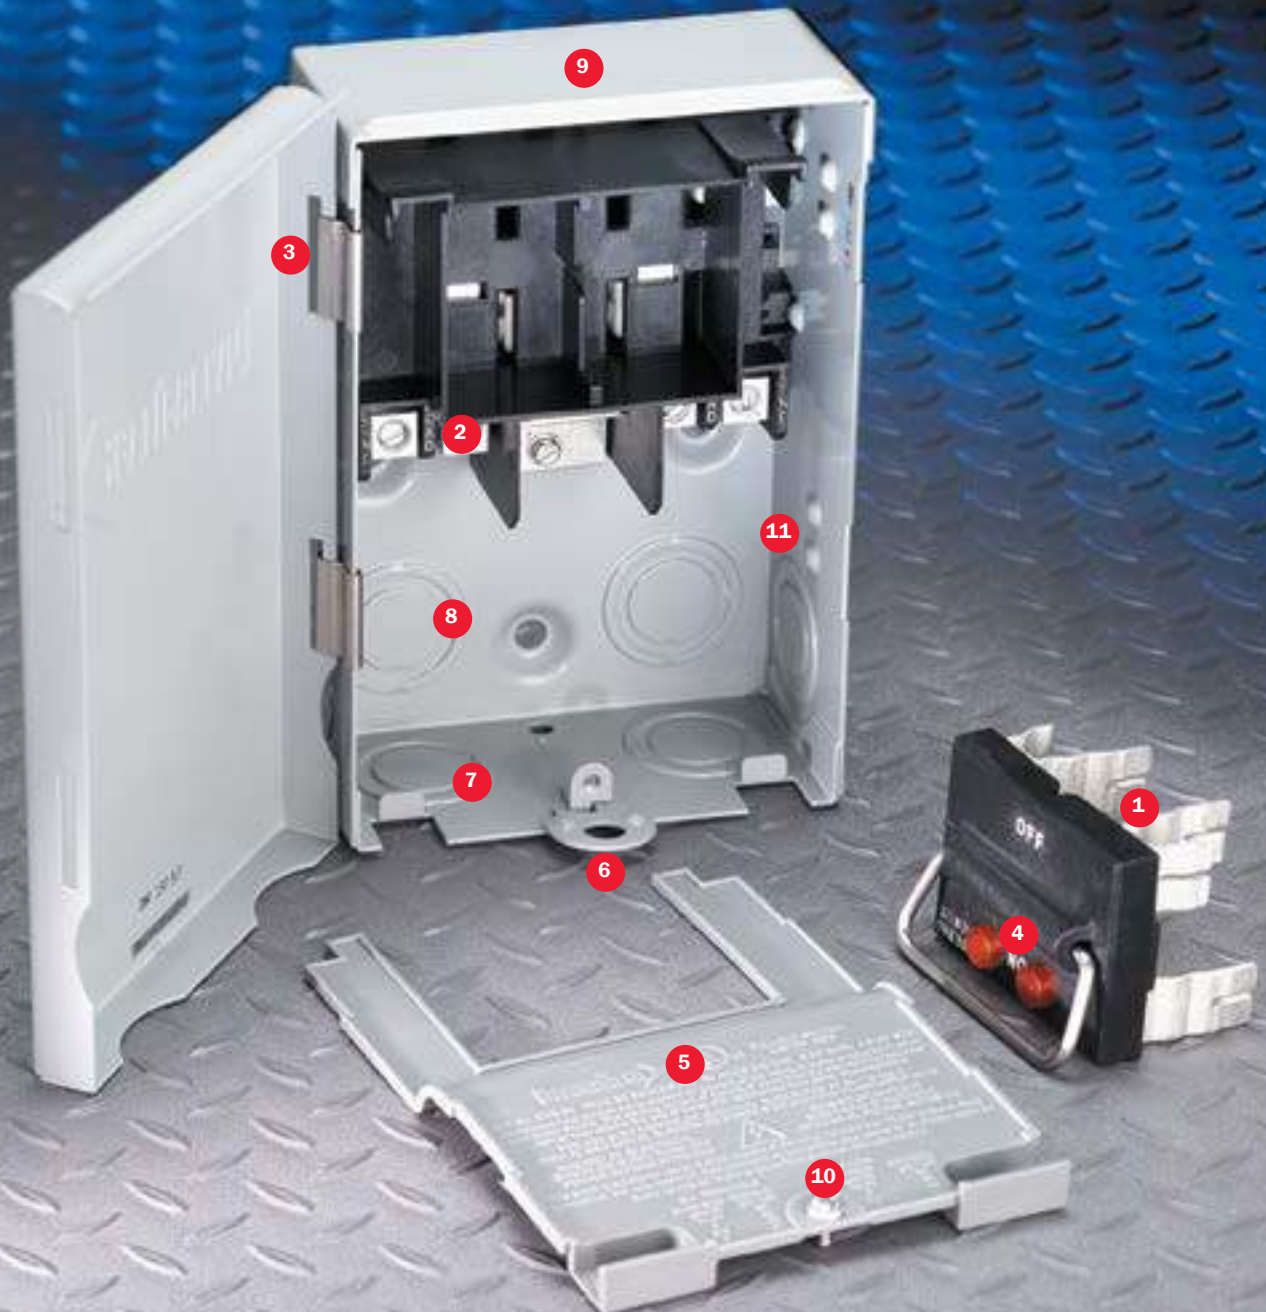

A/C DISCONNECT FEATURES AND BENEFITS

- 1 Fuses install into pull-out handle
- 2 Line, load, and ground terminals aligned for easy hook up with heavy wires
- 3 Reversible side-opening door
- 4 Indicator lights for blown fuses
- 5 Full dead front
- 6 Folding pivot locking tab
- 7 Knockouts accommodate three sizes (1/2", 3/4", and 1")
- 8 Rear entry knockouts
- 9 Heavy gauge steel case
- 10 Standard 1/4" head screw on dead front
- 11 Large internal wiring space



FUSES INSTALL INTO PULL-OUT HANDLE

The DiversiTech disconnect switch is available in two versions – fusible and non-fusible. On the fusible configuration, the pull-out handle also functions as a removable fuse holder. This feature permits easy removal and replacement of fuses. Rather than requiring a fuse puller to reach inside the disconnect switch and remove the blown fuses, one can easily change the fuses with the fuse holder removed from the disconnect switch.

INDICATOR LIGHT FOR BLOWN FUSE

The fusible disconnect switch has an indicator light for fuse condition. When a fuse is blown, the red indicator light illuminates to show not only that a fuse is bad, but specifically, which fuse needs replacement. This feature provides rapid troubleshooting for the contractor inspecting an installation. One can tell instantly (visually) whether a fuse is bad.



MOUNTING AND INLINE WIRING

A unique feature to the DiversiTech disconnect switch is the design of wiring terminals inline. This straight-line arrangement provides for quick and easy wire connection — no need to cut the connection wires to different lengths. All wires are easily installed without unnecessary bending or twisting.

REVERSIBLE SIDE OPENING DOOR

The unique reversible side opening door provides for easy field change from left-hand hinge to right-hand hinge. The standard left-hand hinge is adequate for most all installations except for tight, inside, right-hand corners. In these instances, simply remove the two stainless steel hinge clips and move them to the right-hand side. This permits the door to hinge on the right.



Fractional Horsepower Motors

FEATURES AND BENEFITS



COLOR PACKAGING

Bright, colorful, easy to read packaging removes confusion about motors. The distributor can easily identify the stock of motors on the shelf. The application, voltage, and horsepower of a motor are visible at a glance.



CAPACITOR SIZE

The appropriate size 370 VAC run capacitor is noted on every motor carton.



INNOVATIVE PACKAGING

A unique styrofoam cradle inside the motor carton supports and protects the motor, shaft, and mounting bolts during shipment.



LARGER DIAGRAM

An extra large wiring diagram is supplied on the motor itself, on the motor carton, and also in the installation and safety instruction sheet. This large wiring diagram makes it very easy to read.

CROSS REFERENCE GUIDE

WG840728

Model No.	1/4 hp
MARS	031728
PACKARD	031228
GENLINE	EM03728
MARATHON	3213
AD SMITH	F8010086
FASCO	0309

CROSS REFERENCE

For your convenience, Wagner provides a complete manufacturer cross-reference on the side of every motor carton.



LARGE LABEL

Informative product label contains the motor model number in large type. The UPC code is also printed on every motor label.



CARTON HANDLE

The motor carton has been designed with an innovative handle to make the motors much easier to carry.



EXTENDED BOLTS

Extended mounting bolts provide for easier installation in cramped spaces. With the longer bolts, the installer is able to more easily start the threaded mounting nut.



EXTENDED WIRES

Wagner motor wires are thirty inches long. The added length makes it easier for the contractor to install the new motor.



STANDARD BALL BEARINGS

Ball bearing design improves motor performance and reliability. It also increases heat endurance and motor life. Now standard on most models.



WIRE STRIPPING

Partial stripping leaves the insulation on the motor connection wire. This protects the stranded copper wire and prevents damage to individual strands.



REVERSING PLUG

The electrical reversing plug simplifies rotation direction changes.



INSULATED DISCONNECTS

Run capacitor connections are insulated for increased safety. Flag disconnects on condenser fan motors and inline disconnects on direct drive furnace blower motors are provided.

MULTIPLE HORSEPOWER MOTORS

Multiple horsepower motors allow the contractor and distributor to consolidate multiple part codes into a single stocking unit. The multiple horsepower motor allows the contractor to carry one motor that can be used as a replacement for a wide variety of OEM and other replacement motors, saving time and money.



- All the features and benefits of standard motors
- Plus multiple horsepower
- Variety of voltages, applications, and speeds are available.

Digital 3-Phase Line Voltage Monitor

The DTP-3 is an automatic digital voltage monitor and control system.

By continuously measuring the incoming line voltage, the DTP-3 monitor will detect voltages outside of the tolerance that you set.

If these limits are exceeded, the response timer is started. This timer may be set to a long time value to avoid nuisance tripping, or to a short time value to offer a higher level of load protection.

If the voltage remains outside of the selected tolerance after the time has elapsed, the DTP-3 will turn off its output relay and protect your device. While the load is off, an additional lockout timer is activated to avoid rapid restarts.

- Read Line and Load Side Voltage Instantly
- Simple Three Button Access for Easy Monitoring and Set-Up
- Fault Memory Records Problems for Later Display
- Six Digital Voltmeters Built In
- Sequential Start Timer Built In
- Lock Out Timer Built In
- Response Timer Built In



FEATURES AND BENEFITS

Large Digital LCD Display

Provides instant display of the system's operating voltage, not just indicator lights. System setup is simplified by using the display to set the exact voltage range you want to monitor. Other controls use dials for system adjustment that can lead to inaccurate settings and motor burnout.

Super Simple Operation

Just three buttons set up everything. Easy adjustment of voltage tolerance and timers.

Small Size

Small footprint and low profile fits where other can't.

10 Amp Rated Output Relay with Isolated Contacts

Powerful relay can connect to just about any control circuit. Normally-Open and Normally-Closed contacts are provided for connection to any type of system, motor control or alarm.

2 LED Indicators

Glowing light-emitting-diodes show applied control voltage and output relay operation at a glance.

Precision Digital Circuitry

Completely eliminates the ambiguity associated with analog controls and screwdriver adjustments.

Adjustable Response Time

This timer sets the amount of time between when a voltage outside of the selected tolerance is detected and when the output relay is de-energized. Setting low time values offers faster protection. Setting longer times provides greater resistance to nuisance tripping.

Adjustable Delay Time

This timer sets the amount of time before the protected system is allowed to restart. Typically this timer is set to a value which allows the protected system to bleed-off high pressures or to cool down to a safe value for restarting.

Broad Voltage Adjustment Range

User adjustable monitored voltage range from 160 to 650 VAC. This broad adjustment range incorporates voltages for the majority of compressor installation requirements. Therefore, this single unit can be used across a broad range of installations.

DTP-3 FACTS

Protection

Loss of Phase, Phase Reversal, Voltage Imbalance, Low Voltage, High Voltage.

Display

Large custom LCD indicates all operating conditions at a glance. Three large sets of digits provide easy system troubleshooting.

Voltmeter

Simultaneous display of all three line voltage pairs. One button switches to contactor load side voltage reading.

Input Voltage Range

90 – 650 VAC at 50 or 60 hertz.

Voltage Trip Point

Adjustable in 1 percent increments between 6% and 18% of the selected operating voltage. Restart voltage set point fixed at +3%.

Voltage Symmetry

Adjustable imbalance set point from 2% to 25% of selected operating voltage.

Lockout Delay Timer

Fully adjustable 0 to 720 seconds (0 to 12 minutes). Digital display shows remaining time and user set points.

Sequential Start Timer

0 – 30 seconds in 1 second increments.

Response Timer

0.1 to 20 seconds digital display shows remaining time and user set points.

Memory

Up to 25 previous fault conditions are recorded for display as desired.

Monitor Digital Trifasico de Linea de Voltaje

El DTP-3 es un monitor de voltaje y sistema de control automático digital.

Por estar midiendo continuamente la entrada de la línea de voltaje, este monitor detectará voltajes fuera de la tolerancia que se fijó.

Si este limite es excedido arrancará el Regulador de respuesta. Este regulador podrá ser fijado a una mayor escala de tiempo para evitar el ruido molesto del corte y arranque, o a una escala menor de tiempo para ofrecer un mayor nivel de protección de carga.

Si el voltaje permanece fuera de la tolerancia seleccionada después que el tiempo ha transcurrido, el DTP-3 apagará su relevador de rendimiento y protegerá su aparato. Mientras la carga esta apagada un regulador de cierre adicional es activado para evitar arranques inmediatos.

- Lectura de línea y de la carga de voltaje instantáneamente
- Tres simples botones de acceso para fácil monitoreo e instalación
- Registro de problemas en falla de memoria para posterior exhibición
- Seis voltímetros digitales integrados
- Regulador de arranque secuencial integrado
- Regulador de cierre integrado
- Regulador de respuesta integrado



DTP-3 CARACTERISTICAS Y BENEFICIOS

La gran pantalla digital LCD

suministra al instante la operación del sistema de voltaje no solo luces indicadoras. El sistema programable es simplificado por usar la pantalla para fijar el rango exacto de voltaje que quiera monitorear. Otros controles usan botones para ajustar el sistema, que pueden dirigir hacia una programación inexacta y falla de motor.

Operación super simple

solo tres botones operan todo. Fácil ajuste de tolerancia de voltaje y reguladores de tiempo.

Pequeña medida

y su práctico contorno el cual se ajusta donde otros no pueden.

Relevador de salida de 10 amps con contactos aislados

Relevador de poder que puede conectarse con cualquier circuito de control. Normalmente-Abierto y Normalmente-Cerrado contactos son suministrados para conectarse a cualquier tipo de sistema, control de motor o alarma.

2 indicadores LED

muestran el voltaje de control aplicado y la operación del relevador de salida en un solo vistazo.

Los circuitos de precisión digital

eliminan completamente la ambigüedad asociada con controles análogos y ajustes de desarmador.

Regulador de respuesta ajustable

Este regulador fija la cantidad de tiempo cuando un voltaje externo de la tolerancia seleccionada es detectado y cuando el relevador de salida es de-energizado. El fijar valores de tiempo bajos ofrece una más rápida protección. El fijar un tiempo prolongado suministra gran resistencia evitando el ruido molesto del corte y arranque.

Regulador retardador de tiempo ajustable

Este regulador fija la cantidad de tiempo antes que al sistema de protección se le permita re-iniciar. Típicamente este regulador es fijado a un valor el cual permita al sistema de protección descargar altas presiones o que se enfríe a un valor seguro para re-iniciar.

Amplio ajuste del rango de voltaje

El usuario monitorea el rango ajustable del voltaje de 160 a 650 VAC. Este amplio rango de ajuste incorpora voltajes para la mayoría de los requerimientos de instalación de compresores. Así mismo, esta unidad puede ser usada a través de un rango amplio de instalaciones.

DTP-3 HECHOS

Proteccion

Pérdida de fase, cambio de fase, desequilibrio de voltaje, bajo voltaje, alto voltaje.

Pantalla

Los LCD hechos a la medida indican todas las condiciones de operación en un vistazo. Tres juegos grandes de dígitos suministran fácilmente los problemas del sistema.

Voltimetro

Pantalla simultanea de las tres líneas pares de voltaje. Un botón cambia al contactor para la lectura de la carga de voltaje.

Suministro de voltaje

90-650 VAC a 50 o 60 hertz.

Margen de error del voltaje

Ajustable en un porcentaje de entre 6% y 18% de la operación del voltaje seleccionado. Re-inicio con un +3% del voltaje establecido.

Simetria del voltaje

Desequilibrio ajustable establecido de 2% a 25% de la operación del voltaje seleccionado.

Regulador retardador de cierre

Completamente ajustable de 0 a 720 segundos (0 a 12 minutos) la pantalla digital muestra el tiempo restante y los puntos establecidos por el usuario.

Arrancador secuencial de tiempo

0 – 30 segundos en incrementos de 1 segundo.

Regulador de respuesta

0.1 a 20 segundos la pantalla digital muestra el tiempo restante y los puntos establecidos por el usuario.

Memoria

Hasta 25 condiciones de falla previas son almacenadas para mostrarse según se requiera.


MOTORS**Single Speed Condenser Fan Motors**

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Standard 48 Frame Motor Casing Size
- Low Power Consumption
- 60 C Ambient Design
- Electrically Reversible
- Continuous Air Over
- Class B Insulation
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ



**BALL BEARINGS
NOW STANDARD**

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840727	1/6	208-230	1075/1	1.3	EA	1
WG840728	1/4	208-230	1075/1	2.2	EA	1
WG840729	1/3	208-230	1075/1	2.8	EA	1
WG840730	1/2	208-230	1075/1	4.2	EA	1
WG840731	3/4	208-230	1075/1	4.5	EA	1
WG840204	1/4	208-230	825/1	1.5	EA	1
WG840205	1/3	208-230	825/1	2.2	EA	1

**Direct Drive Furnace Blower Motors**

- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Uses 370V Capacitors
- Standard 48 Frame Motor Casing Size
- 2.5" Diameter Hub Rings included
- Low Power Consumption
- Automatic Thermal Overload Protector
- Continuous Duty, Air Over
- Electrically Reversible
- Class B Insulation
- Speed: 1075/3
- Quiet Operation
- 60 HZ



**BALL BEARINGS
NOW STANDARD**

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840583	1/4	115	1075/3	4.6	EA	1
WG840584	1/4	208-230	1075/3	2.2	EA	1
WG840585	1/3	115	1075/3	6.7	EA	1
WG840586	1/3	208-230	1075/3	2.9	EA	1
WG840587	1/2	115	1075/3	10.2	EA	1
WG840588	1/2	208-230	1075/3	5.0	EA	1
WG840589	3/4	115	1075/3	11.3	EA	1
WG840590	3/4	208-230	1075/3	5.4	EA	1
WG840595	1	115	1075/3	12.6	EA	1
WG840596	1	208-230	1075/3	5.59	EA	1

**High Temperature Condenser Fan Motors**

- 70°C Ambient Temperature
- Installs with all Standard 48 Frame Mounting Brackets
- Standard Shaft Length, Diameter, and Flats
- Drain Holes with Plugs in both end plates
- Automatic Thermal Overload Protector
- Standard 48 Frame Motor Casing Size
- Low Power Consumption
- Electrically Reversible
- Continuous Air Over
- Class B Insulation
- Quiet Operation
- Extended Studs
- 30" Leads
- 60 HZ



**BALL BEARINGS
NOW STANDARD**

CATALOG NO.	HP	VOLTAGE	SPEED	FLA	UOM	ORDER MULTIPLE
WG840728HT	1/4	208-230	1075/1	2.2	EA	1
WG840729HT	1/3	208-230	1075/1	2.8	EA	1
WG840730HT	1/2	208-230	1075/1	4.2	EA	1
WG840731HT	3/4	208-230	1075/1	5.3	EA	1
WG840736HT	1/4	460	1075/1	1.65	EA	1
WG840737HT	1/3	460	1075/1	2.85	EA	1
WG840738HT	1/2	460	1075/1	4.3	EA	1
WG840739HT	3/4	460	1075/1	5.3	EA	1
WG840204HT	1/4	208-230	825/1	1.5	EA	1
WG840205HT	1/3	208-230	825/1	2.2	EA	1



MOTORS cont'd

The Multi-Horsepower motors are specially designed to cover a range of applications. The condenser fan motors range from 1/2 to 1/5; 1/3 to 1/6 both at 1075 rpm; 1/3 to 1/6 at 825rpm. The direct drive furnace blower motors range from 1/2 to 1/6 in both 115 and 230 volts and 3/4 to 1/5 in both 115 and 230 volts all at 1075rpm. These motors feature reversing plugs, extended thru bolts 36 inch leads and are designed for 370 volt capacitors. Installs with all 48 frame mounting brackets.

Multiple Horsepower Motors

CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840463	DDFB	115	1075/4	1/2-7.0	1/3-6.7	1/4-4.4	1/5-3.2	1/6-2.4	EA	1
WG840464	DDFB	208-230	1075/4	1/2-3.9	1/3-3.6	1/4-2.5	1/5-1.8	1/6-1.3	EA	1
WG840466	DDFB	115	1075/4	3/4-8.1	1/2-6.6	1/3-4.6	1/4-3.8	1/5-3.1	EA	1
WG840467	DDFB	208-230	1075/4	3/4-3.8	1/2-3.7	1/3-2.5	1/4-1.8	1/5-1.7	EA	1



Multiple Horsepower Condenser Fan Motors

CATALOG NO.	APPLICATION	VOLTAGE	SPEED	(1) HP-FLA	(2) HP-FLA	(3) HP-FLA	(4) HP-FLA	(5) HP-FLA	UOM	ORDER MULTIPLE
WG840465	CF	208-230	1075/2	1/3-2.8	1/4-2.0	1/5-1.7	1/6-1.5		EA	1
WG840468	CF	208-230	1075/2	1/2-3.0	1/3-2.5	1/4-2.0	1/5-1.3		EA	1
WG840469	CF	208-230	825/2	1/3-2.1	1/4-1.7	1/5-1.5	1/6-1.2		EA	1

MOTOR BRACKETS

DiversiTech Motors Bracket

These brackets help hold the motor securely.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-1	Fixed Lug Assembly for 5-1/2" diameter motors	EA	1
DMB-2	Adjustable Lug Assembly for 5-1/2" diameter motors	EA	1

Motor Mount – Flex Bracket

Torsion Flex Bracket holds motor securely. Fits 5- 1/2" motors. Typically used for Goodman equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DMB-3	5-1/2" Motor Mount Torsion Flex Bracket	EA	1

Rheem Motor Bracket

These brackets help hold the motor securely.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
A60306K	Mounting Plate for Rheem Condensing UnitsEA		1

BEARINGS

Cushioned Pillow Blocks

These blocks are used to reduce noise from vibration from motors.

CATALOG NO.	DESCRIPTION	INDUSTRY NO.	LAU NO.	BEARING SHAFT SIZE	UOM	ORDER MULTIPLE
535-BB1	Bronze Bearing Pillow Block	NAH8A		1/2"	EA	1
535-BB2	Bronze Bearing Pillow Block	NAH10A	38-2204-01	5/8"	EA	1
535-BB3	Bronze Bearing Pillow Block	NAH12A	38-2086-01	3/4"	EA	1
535-BB4	Bronze Bearing Pillow Block	NAH16A	38-2087-01	1"	EA	1



Side Flange Mount Pillow Blocks

These blocks are used to reduce noise from vibration from motors.


CATALOG NO.	DESCRIPTION	INDUSTRY NO.	BEARING SHAFT SIZE	UOM	ORDER MULTIPLE
535-BB5	Cushioned Flange Block	NVH12A	3/4"	EA	1
535-BB6	Cushioned Flange Block	NVH10A	5/8"	EA	1



WHIPS

DiversiWhips

Liquid tight flexible conduit system. A labor saving convenience kit for A/C unit hookup. Also use for heat pumps, refrigeration, hot tubs, swimming pools and outdoor lighting. Three distinct wire colors for ease of hook up. 1 straight and 1 90 degree metallic or non metallic connector. 90 degree connector is removable for straight connections. (Second straight connector not included.) U.L. and C.U.L Listed.




6-12-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	6
6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	6
6-34-4	3/4 x 4' #8 THHN Wire – Metallic Connectors	EA	6
6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	6
6-34-8	3/4 x 8' #8 THHN Wire – Metallic Connectors	EA	3
6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-3NM	3/4 x 3' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-8NM	3/4 x 8' #8 THHN Wire – Non-Metallic Connectors	EA	3

*For DiversiWhips produced with 2 straight connectors, add S to part number (ex: 6-12-4S).

DiversiWhips for the Swimming Pool Industry

A labor saving kit for hookup of swimming pool motors, pumps, filters, and timers. Three distinct wire colors for ease of hookup. 1 straight and 1 90 degree metallic or non metallic connector included.



6-12-4P

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-4P	1/2 x 4' #12 THHN Wire – Metallic Connectors	EA	6
6-12-6P	1/2 x 6' #12 THHN Wire – Metallic Connectors	EA	6
6-12-8P	1/2 x 8' #12 THHN Wire – Metallic Connectors	EA	6
6-12-4NMP	1/2 x 4' #12 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NMP	1/2 x 6' #12 THHN Wire – Non-Metallic Connectors	EA	6
6-12-8NMP	1/2 x 8' #12 THHN Wire – Non-Metallic Connectors	EA	6

Solid Wire Whips

6-12-4NMSWP	1/2 x 4' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
6-12-6NMSWP	1/2 x 6' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
6-12-8NMSWP	1/2 x 8' #12 Solid 3 Wire – Non-Metallic Conn.	EA	3
6-12-4NM4SWP	1/2 x 4' #12 Solid 4 Wire – Non-Metallic Conn.	EA	6
6-12-6NM4SWP	1/2 x 6' #12 Solid 4 Wire – Non-Metallic Conn.	EA	6
6-12-8NM4SWP	1/2 x 8' #12 Solid 4 Wire – Non-Metallic Conn.	EA	3

DiversiWhips Pallet Packs

DiversiWhips are now available in a convenient, bulk packaged pallet pack at a discounted price. Pallet pack makes an attractive floor standing display. 1 straight and 1 90 degrees metallic or non metallic connector.



B6-12-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B6-12-4	1/2 x 4' #10 THHN Wire – Metallic Connectors	EA	90
B6-12-6	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	60
B6-34-6	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	45
B6-12-4NM	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	90
B6-12-6NM	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-4NM	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	60
B6-34-6NM	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	45

DiversiWhips with Extended Length Wires

DiversiWhips are available with extra long lead wires for those difficult to wire applications. These whips offer 10in. of lead wire on the straight side and 18in. of lead wire on the 90 degree side.



6-12-4R

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-12-6R	1/2 x 6' #10 THHN Wire – Metallic Connectors	EA	6
6-34-4R	3/4 x 4' #8 THHN Wire – Metallic Connectors	EA	6
6-34-6R	3/4 x 6' #8 THHN Wire – Metallic Connectors	EA	6
6-12-4NMR	1/2 x 4' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-12-6NMR	1/2 x 6' #10 THHN Wire – Non-Metallic Connectors	EA	6
6-34-4NMR	3/4 x 4' #8 THHN Wire – Non-Metallic Connectors	EA	6
6-34-6NMR	3/4 x 6' #8 THHN Wire – Non-Metallic Connectors	EA	6

DIVERSITECH ELECTRICAL DISCONNECTS

Disconnects—Metal Case

Fused model designed with fuses in pull out handle for easy replacement. The line, load, and ground terminals are aligned for ease of wiring. This product has a reversible door which opens to either the left or right. The side open door opens more than 180 degrees for maximum access and has a full dead front. The fused models have indicator lights for blown fuses. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R and the US Patent is 6,630,637.



DDS-60

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DDS-30	30A Fusible Disconnect Switch	EA	10
DDS-60	60A Fusible Disconnect Switch	EA	10
DDS-60U	60A Non-Fusible Disconnect Switch	EA	10

Low Profile Disconnects—Metal Case

This low profile disconnect switch is a slightly smaller design than that of the standard DiversiTech disconnects. This has a side opening door with a full dead front. This is rain tight and sleet resistant. The UL Listed number is IRF9, NEMA Type 3R.



EDS-60U

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
EDS-60U	60A Non-Fusible Disconnect Switch	EA	10

Disconnects—Non-Metallic Case

This 60 amp non-fusible disconnect is housed in a lightweight, non-metallic case. It features a side opening door with more than 180° access, full dead front, and a locking tab.



750-P60NF

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-P60NF	60A Non Fusible Disconnect Switch, Non-Metallic Case, Plastic	EA	10

SQUARE D ELECTRICAL DISCONNECTS

Square D - Q0200TR A/C Disconnect

This A/C Disconnect is 60 amp switch rated for 10 HP motors at 240 VAC. The switch is an on off circuit breaker with no pull out head that could be lost or stolen. There are four one inch combination locks with two being in the back and two in the bottom end wall. Removing the cover housing on this disconnect provides open to lugs for easy wiring.



Q0200TR




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
Q0200TR	60A Disconnect Switch	EA	1

Three Phase Disconnects

UL listed, File E5239. Meets UL98 for enclosed switches and NEMA Std. KS 1. Suitable as service entrance equipment when applied with neutral or ground lug kit. Rainproof type 3R enclosure.



750-30F-3PH



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-30F-3PH	Fusible 30 Amp	EA	1
750-60F-3PH	Fusible 60 Amp	EA	1
750-60NF-3PH	Non-Fusible 60 Amp	EA	1


SURGE PROTECTORS

Surge Protectors

The SP-SDSA1175 Square D surge protection device is designed and listed for indoor or outdoor installation and surge suppression for single-phase three-wire 120/240VAC or two-wire 120 VAC 60 Hz electrical services. This product is ideal for residential applications for single phase power systems. They work together with surge protection plug strips to provide surge suppression for sensitive electronics.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SP-SDSA1175	Surge Protection Device	EA	1

SP-SDSA1175



CONDUIT, FITTINGS, CABLE

Liquid Tite Flexible Conduit

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.



750-12100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-38100	3/8" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-12100	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-12100BOX	1/2" x 100' Liquid Tite Conduit – Non-Metallic (in box), 100' per roll	EA	1
750-500	1/2" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-34100	3/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-600	3/4" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
750-10100	1" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-114100	1-1/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-15100	1-1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
750-2050	2" x 50' Liquid Tite Conduit – Non-Metallic, 50' per roll	EA	1

Romex Connectors – Metallic

These Metallic Romex Connectors are made of zinc die cast are cable connectors for Romex wire. U.L. Listed C.S.A. Approved.



750-RC842

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-RC841	3/8" Romex Connector for 1/2" Knockouts	EA	100
750-RC842	3/4" Romex Connector for 3/4" Knockouts	EA	50

U.L. Listed and C.S.A. Approved.

EMT (Thinwall) Fittings

These are used to join EMT conduit to boxes on enclosures.



625-800

625-810

625-304

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-800	Set Screw Connector – 1/2"	EA	50
625-801	Set Screw Connector – 3/4"	EA	25
625-304	Strap – One Hole – 1/2"	EA	100
625-305	Strap – One Hole – 3/4"	EA	100
625-810	Set Screw Coupling – 1/2"	EA	50
625-811	Set Screw Coupling – 3/4"	EA	25

Aluminum Armored MC Cable

90° C Rated aluminum metal clad cable system. THHN solid copper with specially compounded heat-resistant U.L. Listed insulation and jacket. Flexible interlocked aluminum armor. Extremely durable – withstands severe handling. U.L. Listed #4. Conforms to NEC article 333.



640-122

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-122	12-2 Aluminum Armored MC Cable – 100' per roll	EA	1
640-142	14-2 Aluminum Armored MC Cable – 100' per roll	EA	1

Liquid Tite Connectors

For use with metallic and non metallic liquid tite conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulled through. U. L. Listed. C.U.L. Listed.



750-MLT50 750-NMLT50

750-NMLT9050


CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-NMLT50	1/2" Non-Metallic Straight Connector	EA	25
750-NMLT4550	1/2" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9050	1/2" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT75	3/4" Non-Metallic Straight Connector	EA	10
750-NMLT4575	3/4" Non-Metallic 45 Degree Elbow Connector	EA	10
750-NMLT9075	3/4" Non-Metallic 90 Degree Elbow Connector	EA	10
750-NMLT100	1" Non-Metallic Straight Connector	EA	5
750-NMLT90100	1" Non-Metallic 90 Degree Elbow	EA	5
750-NMLT150	1-1/2" Non-Metallic Straight Connector	EA	5
750-NMLT90150	1-1/2" Non-Metallic 90 Degree Elbow	EA	5
750-MLT50	1/2" Metallic Straight Connector	EA	25
750-MLT9050	1/2" Metallic 90 Degree Elbow	EA	10
750-MLT75	3/4" Metallic Straight Connector	EA	10
750-MLT9075	3/4" Metallic 90 Degree Elbow	EA	10

CONDUIT, FITTINGS, CABLE cont'd

Non-Metallic Sheathed Cable (Romex Wire)

600V building wire. Easy to pull and strip, flame and moisture resistant. Saves time, labor and money. Color coded conductors of copper, PVC insulation and outer jacket with ground. U.L. Listed 719 Federal Specifications J C94.

620-6-2




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-6-2	6 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-8-2	8 AWG, 2 Conductors with Ground – 125' per pack	EA	1
620-10-2	10 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-12-2	12 AWG, 2 Conductors with Ground – 250' per pack	EA	1
620-14-2	14 AWG, 2 Conductors with Ground – 250' per pack	EA	1

U.L. Listed 719 Federal Specifications J-C94.

Cable Staples

Cable Staples for NMB Cable (Romex) and Copper Insulated Staples for thermostat wire.

625-183



625-IS5

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-183	Romex Staples – 1/2", pack of 100	PK	1
625-IS5	Copper Insulated #5 Staples for T-Stat Wire	EA	100

BX Set Screw Connectors

These connectors are for BX cable range of .445 to .630 in diameter. This product is UL listed and CSA approved.

640-845



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
640-845	Trade Size – 3/8"	EA	100

Single Piece Liquid Tite Fittings

Conduit threads onto ferrule and up inside the outer body. An inside taper squeezes down on the outside of conduit for a superior liquid tight seal. The cut portion of the conduit does not show, giving a more finished appearance. Easy to use at a lower cost than regular liquid tite fittings.

750-SLTC9050

750-SLTC50



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-SLTC50	1/2" Straight Screw-On Fitting	EA	25
750-SLTC9050	1/2" 90° Screw-On Fitting	EA	25
750-SLTC75	3/4" Straight Screw-On Fitting	EA	25
750-SLTC9075	3/4" 90° Screw-On Fitting	EA	25

MOTOR RUN CAPACITORS (USA MADE)

Made in the U.S.A. Capacitors Round Metal Can

Line of made in the USA capacitors featuring dual voltage for both 370V and 440V applications. Designed specifically for the demands of aftermarket service parts.

4JR0535U



CATALOG NO.	VOLTAGE	uf	UOM	ORDER MULTIPLE
4JR0525U	370V/440V	25+5	EA	1
4JR0530U	370V/440V	30+5	EA	1
4JR7530U	370V/440V	30+7.5	EA	1
4JR0535U	370V/440V	35+5	EA	1
4JR7535U	370V/440V	35+7.5	EA	1
4JR0540U	370V/440V	40+5	EA	1
4JR7540U	370V/440V	40+7.5	EA	1
4JR0545U	370V/440V	45+5	EA	1
4JR7545U	370V/440V	45+7.5	EA	1
4JR0550U	370V/440V	50+5	EA	1
4JR7550U	370V/440V	50+7.5	EA	1
4JR0555U	370V/440V	55+5	EA	1
4JR7555U	370V/440V	55+7.5	EA	1
4JR0560U	370V/440V	60+5	EA	1
4JR7560U	370V/440V	60+7.5	EA	1
4JR0580U	370V/440V	80+5	EA	1

Made in the U.S.A. Capacitors Oval Metal Can

Line of made in the USA capacitors featuring dual voltage for both 370V and 440V applications. Designed specifically for the demands of aftermarket service parts.

45100HU



CATALOG NO.	VOLTAGE	uf	UOM	ORDER MULTIPLE
45050HU	370V/440V	5	EA	1
45075HU	370V/440V	7.5	EA	1
45100HU	370V/440V	10	EA	1
45150HU	370V/440V	15	EA	1
45200HU	370V/440V	20	EA	1
45250HU	370V/440V	25	EA	1
45300HU	370V/440V	30	EA	1
45350HU	370V/440V	35	EA	1
45400HU	370V/440V	40	EA	1
45450HU	370V/440V	45	EA	1
45125HU	370V/440V	12.5	EA	1
45500HU	370V/440V	50	EA	1
45600HU	370V/440V	60	EA	1
45700HU	370V/440V	70	EA	1
45800HU	370V/440V	80	EA	1

CAPACITORS

Motor Run Capacitors—370VAC,
Metal, Oval Can

These single capacitance oval, metal can capacitors are designed for continuous run.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
37020H	2	EA	1
37030H	3	EA	1
37040H	4	EA	1
37050H	5	EA	1
37050HB	5	EA	100*
37060H	6	EA	1
37075H	7.5	EA	1
37075HB	7.5	EA	100*
37100H	10	EA	1
37100HB	10	EA	100*
37125H	12.5	EA	1
37150H	15	EA	1
37175H	17.5	EA	1
37200H	20	EA	1
37250H	25	EA	1
37300H	30	EA	1
37350H	35	EA	1
37400H	40	EA	1
37450H	45	EA	1
37500H	50	EA	1
37600H	60	EA	1
37700H	70	EA	1
37800H	80	EA	1

*100 per pack

Motor Run Capacitors—370VAC

This single capacitance round, metal can capacitors are designed for continuous run.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
37050R	5	EA	1
37075R	7.5	EA	1
37100R	10	EA	1
37125R	12.5	EA	1
37150R	15	EA	1
37175R	17.5	EA	1
37200R	20	EA	1
37250R	25	EA	1
37300R	30	EA	1
37350R	35	EA	1
37400R	40	EA	1
37450R	45	EA	1
37500R	50	EA	1
37550R	55	EA	1
37600R	60	EA	1
37800R	80	EA	1

Motor Run Capacitors—370VAC

Dual capacitance. Oval, metal can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
36J0515	15+5	EA	1
36J1015	15+10	EA	1
36J0520	20+5	EA	1
36J1520	20+15	EA	1
36J0525	25+5	EA	1
36J1025	25+10	EA	1
36J0330	30+3	EA	1
36J0530	30+5	EA	1
36J7530	30+7.5	EA	1
36J0535	35+5	EA	1
36J7535	35+7.5	EA	1
36J7545	45+7.5	EA	1
36J0540	40+5	EA	1
36J0545	45+5	EA	1
36J0555	55+5	EA	1
36J7555	55+7.5	EA	1
36J1060	60+10	EA	1

Motor Run Capacitors—370VAC

This dual capacitance round metal can capacitors are designed for continuous run.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
36R0515	15+5	EA	1
36R0520	20+5	EA	1
36R0325	25+3	EA	1
36R0425	25+4	EA	1
36R0525	25+5	EA	1
36R0330	30+3	EA	1
36R0530	30+5	EA	1
36R7530	30+7.5	EA	1
36R0335	35+3	EA	1
36R0435	35+4	EA	1
36R0535	35+5	EA	1
36R1035	35+10	EA	1
36R0340	40+3	EA	1
36R0540	40+5	EA	1
36R7540	40+7.5	EA	1
36R0545	45+5	EA	1
36R0550	50+5	EA	1
36R0555	55+5	EA	1
36R7555	55+7.5	EA	1
36R0560	60+5	EA	1
36R7560	60+7.5	EA	1
36R0570	70+5	EA	1
36R0580	80+5	EA	1
36R7580	80+7.5	EA	1
36R1080	80+10	EA	1

CAPACITORS *cont'd*

Motor Run Capacitors—440VAC

These single capacitance oval, metal can capacitors are designed for continuous run.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
45020H	2	EA	1
45030H	3	EA	1
45040H	4	EA	1
45050H	5	EA	1
45060H	6	EA	1
45075H	7.5	EA	1
45100H	10	EA	1
45125H	12.5	EA	1
45150H	15	EA	1
45175H	17.5	EA	1
45200H	20	EA	1
45250H	25	EA	1
45300H	30	EA	1
45350H	35	EA	1
45400H	40	EA	1
45450H	45	EA	1
45500H	50	EA	1
45550H	55	EA	1
45600H	60	EA	1
45700H	70	EA	1
45800H	80	EA	1

Motor Run Capacitor—440VAC

Single capacitance. Round, metal can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
45050R	5	EA	1
45075R	7.5	EA	1
45100R	10	EA	1
45125R	12.5	EA	1
45150R	15	EA	1
45200R	20	EA	1
45250R	25	EA	1
45300R	30	EA	1
45350R	35	EA	1
45400R	40	EA	1
45450R	45	EA	1
45500R	50	EA	1
45550R	55	EA	1

Motor Run Capacitor—440VAC

Dual capacitance. Oval, metal can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
4JJ0525	25+5	EA	1
4JJ0530	30+5	EA	1
4JJ0535	35+5	EA	1
4JJ0540	40+5	EA	1
4JJ0545	45+5	EA	1
4JJ0555	55+5	EA	1
4JJ7535	35+7.5	EA	1
4JJ7540	40+7.5	EA	1
4JJ7545	45+7.5	EA	1
4JJ1055	55+10	EA	1
4JJ0560	60+5	EA	1

Motor Run Capacitor—440VAC

Dual capacitance. Round, metal can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
4JR0520	20+5	EA	1
4JR0525	25+5	EA	1
4JR7525	25+7.5	EA	1
4JR0530	30+5	EA	1
4JR7530	30+7.5	EA	1
4JR0535	35+5	EA	1
4JR7535	35+7.5	EA	1
4JR0440	40+4	EA	1
4JR0540	40+5	EA	1
4JR7540	40+7.5	EA	1
4JR0545	45+5	EA	1
4JR7545	45+7.5	EA	1
4JR0550	50+5	EA	1
4JR7550	50+7.5	EA	1
4JR0555	55+5	EA	1
4JR1055	55+10	EA	1
4JR7555	55+7.5	EA	1
4JR0560	60+5	EA	1
4JR7560	60+7.5	EA	1
4JR1060	60+10	EA	1
4JR0570	70+5	EA	1
4JR7570	70+7.5	EA	1
4JR0580	80+5	EA	1
4JR7580	80+7.5	EA	1
4JR1080	80+10	EA	1

CAPACITORS *cont'd***Motor Start Capacitors –
110/125 VAC**

Variable capacitance. Round, plastic can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
56-72	56-72	EA	1
88-108	88-108	EA	1
108-130	108-130	EA	1
124-156	124-156	EA	1
145-175	145-175	EA	1
161-193	161-193	EA	1
189-227	189-227	EA	1
200-240	200-240	EA	1
216-259	216-259	EA	1
233-292	233-292	EA	1
270-324	270-324	EA	1
324-388	324-388	EA	1
340-408	340-408	EA	1
378-440	378-440	EA	1
400-480	400-480	EA	1
460-552	460-552	EA	1
540-648	540-648	EA	1
590-708	590-708	EA	1
708-850	708-850	EA	1
829-995	829-995	EA	1
1000-1200	1000-1200	EA	1

**Motor Start Capacitors –
220/250 VAC**

Variable capacitance. Round, plastic can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
43-53220	43-53	EA	1
56-72220	56-72	EA	1
72-88220	72-88	EA	1
88-108220	88-108	EA	1
108-130220	108-130	EA	1
124-156220	124-156	EA	1
145-175220	145-175	EA	1
161-193220	161-193	EA	1
189-227220	189-227	EA	1
216-259220	216-259	EA	1
233-292220	233-292	EA	1
270-324220	270-324	EA	1

**Motor Start Capacitors –
330 VAC**

Variable capacitance. Round, plastic can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
43-53330	45-53	EA	1
72-88330	72-88	EA	1
88-108330	88-108	EA	1
108-130330	108-130	EA	1
124-156330	124-156	EA	1
145-175330	145-175	EA	1
161-193330	161-193	EA	1
189-227330	189-227	EA	1
216-259330	216-259	EA	1
270-324330	270-324	EA	1

HARD START KITS

Torque Plus—Hard Start Kits

Totally solid state, our DST 5 is just right for all permanent split capacitor (PSC) compressors from 1/2 to 10 H.P. It can be used on units that operate on 120 through 288 Volts. The DST 6 offers a larger capacitor for severely hard to start compressors. The DST 6 can be used on all PSC single phase compressors from 1 1/2 to 10 H.P. A unique combination of relay and safety timer. The capacitor is automatically disconnected in 0.5 seconds if the compressor fails to start.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DST-5	Torque Plus – 300% Torque Multiplier	EA	1
DST-6	Torque Plus – 500% Torque Multiplier	EA	1

DiversiTech Hard Start Kits

DiversiTech hard start kits reduce contractor call backs by boosting the starting capacitor for a compressor. This prevents home brownouts and improves homeowner satisfaction with your service. DiversiTech's hard start kits feature a potential relay that disconnects the start capacitor from the circuit at exactly the moment it is no longer needed to boost the compressor. This results in a precision compressor start even under hard starting conditions. Replaces the Kickstart KS-1 and the 5-n-1 kit.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HSK1	Hard Start Kit for 3.5 to 5HP Compressor	EA	1
HSK5	Hard Start Kit for 1 to 3HP Compressor	EA	1

CONTACTORS

DiversiTech Definite Purpose Contactors

Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a two pole on a small frame.




EC30224

CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
EC30224	30	24	EA	1
EC302120	30	120	EA	1
EC302240	30	240	EA	1
EC40224	40	24	EA	1
EC402120	40	120	EA	1
EC402240	40	240	EA	1

Definite Purpose Contactors

Three pole, large frame. 30-40 Amp contactors work with the DD11 auxiliary contacts, and 50-90 Amp contactors work with the D10 and D11 auxiliary contacts.



DP30324

CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP30324	30	24	EA	1
DP303120	30	120	EA	1
DP303240	30	240	EA	1
DP40324	40	24	EA	1
DP403120	40	120	EA	1
DP403240	40	240	EA	1
DP50324	50	24	EA	1
DP503120	50	120	EA	1
DP503240	50	240	EA	1
DP60324	60	24	EA	1
DP603120	60	120	EA	1
DP603240	60	240	EA	1
DP75324	75	24	EA	1
DP753120	75	120	EA	1
DP753240	75	240	EA	1
DP90324	90	24	EA	1
DP903120	90	120	EA	1
DP903240	90	240	EA	1

Definite Purpose Contactors

Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a four pole on a small frame and will work with the DD11 auxiliary contacts.



DP304120



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP304120	30	120	EA	1
DP30424	30	24	EA	1
DP304240	30	240	EA	1
DP304277	30	277	EA	1
DP404120	40	120	EA	1
DP40424	40	24	EA	1
DP404240	40	240	EA	1
DP404277	40	277	EA	1

DiversiTech Three Pole Definite Purpose Contactors

Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a three pole on a large frame.



EC30324

EC40324

CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
EC30324	30	24	EA	1
EC303120	30	120	EA	1
EC303240	30	240	EA	1
EC40324	40	24	EA	1
EC403120	40	120	EA	1
EC403240	40	240	EA	1

Definite Purpose Contactors

Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a single pole on a small frame and will work with the DD11 auxiliary contacts.



DP30124




CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP30124	30	24	EA	1
DP301120	30	120	EA	1
DP301240	30	240	EA	1

Definite Purpose Contactors

Definite purpose contactors can be used for heating, air conditioning, refrigeration, data processing, and food service equipment. Quick connect terminals provide for easy wiring. This contactor comes as a two pole on a small frame and will work with the DD11 auxiliary contacts.



DP402120



CATALOG NO.	FL AMPS	COIL VAC	UOM	ORDER MULTIPLE
DP25224	25	24	EA	1
DP252120	25	120	EA	1
DP252240	25	240	EA	1
DP30224	30	24	EA	1
DP302120	30	120	EA	1
DP302240	30	240	EA	1
DP40224	40	24	EA	1
DP402120	40	120	EA	1
DP402240	40	240	EA	1

CONTACTORS *cont'd***Contactor Accessories**

These are the replacement coils for the multiple sizes available for the definite purpose contactors.

**DA2V14**

CATALOG NO.	CONTACTOR FRAME SIZE	VOLTAGE	UOM	ORDER MULTIPLE
DA2V14	50-60 Amp	24	EA	1
DA2V02	50-60 Amp	120	EA	1
DA2V09	50-60 Amp	240	EA	1
DA2V06	50-60 Amp	480	EA	1
DA3V02	75-90 Amp	120	EA	1
DA3V09	75-90 Amp	240	EA	1
DA3V06	75-90 Amp	480	EA	1

Contactor Accessories

D10 and D11 auxiliary contacts are designed for 50 Amp to 90 Amp 3 pole contactors while the DD11 auxiliary contacts are designed for 20 to 40 Amp 3 pole contactors.

**D10**

CATALOG NO.	CONTACTOR FRAME SIZE	VOLTAGE	UOM	ORDER MULTIPLE
D10	1-N.O.	50-90 Amp	EA	1
D11	1-N.O. 1-N.C.	50-90 Amp	EA	1
DD11	1-N.O. 1-N.C.	20-40 Amp	EA	1

TRANSFORMERS**Transformers – Class 2 1585
UL Recognized**


The transformers provide the power source for heating, air conditioning, or refrigeration systems.

T1404

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T1401	40	120	24	EA	1
T1404	40	120/208/240	24	EA	1

**Transformers – Class 2 1585
UL Recognized**

The transformers provide the power source for heating, air conditioning, or refrigeration systems.

T2401

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T2401	40	120	24	EA	1
T2403	40	208/240	24	EA	1
T2404	40	120/208/240	24	EA	1

**Transformers – Class 2 1585
UL Recognized**

The transformers provide the power source for heating, air conditioning, or refrigeration systems. These are multi mounted with wire connection secondary.

T5401

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T3401	40	120	24	EA	1
T3403	40	120/208/240	24	EA	1
T3501	50	120/208/240	24	EA	1
T5401	40	120	24	EA	1

**Transformers – Class 2 1585
UL Recognized**

Heavy duty with external fuse (T67XX) or circuit breaker (T77XX).

T6752

CATALOG NO.	VA	PRI	SEC	UOM	ORDER MULTIPLE
T6752	75	120/208/240	24	EA	1
T6753	75	120/208/240/480	24	EA	1
T7752	75	120/208/240/480	24	EA	1

RELAYS

General Purpose Relays – 9400 Series

This product features quick connect terminals with universal mounting with break away tabs.

CATALOG NO.	DESCRIPTION	AMPS RES	FLA/LRA@125V	FLA/LRA@250V	COIL VOLTAGE	UOM	ORDER MULTIPLE
D90-360	SPST-NO	18	12/60	8/48	24 VAC	EA	1
D90-362	SPST-NO	18	12/60	8/48	120 VAC	EA	1
D90-364	SPST-NO	18	12/60	8/48	240 VAC	EA	1
D90-370	SPDT	18	12/60	8/48	24 VAC	EA	1
D90-372	SPDT	18	12/60	8/48	120 VAC	EA	1
D90-374	SPDT	18	12/60	8/48	240 VAC	EA	1
D90-380	SPST NO+NC	18	12/60	8/48	24 VAC	EA	1
D90-382	SPST NO+NC	18	12/60	8/48	120 VAC	EA	1
D90-384	SPST NO+NC	18	12/60	8/48	240 VAC	EA	1

D90-360

General Purpose Relays – 8400 Series

This product features quick connect terminals with universal mounting with break away tabs



D90-290Q

CATALOG NO.	DESCRIPTION	AMPS RES/IND	COIL VOLTAGE	UOM	ORDER MULTIPLE
D90-290Q	SPST-NO	16/8	24 VAC	EA	1
D90-291Q	SPST-NO	16/8	120 VAC	EA	1
D90-292Q	SPST-NO	16/8	240 VAC	EA	1
D90-293Q	SPDT	8/8	24 VAC	EA	1
D90-294Q	SPDT	8/8	120 VAC	EA	1
D90-295Q	SPDT	8/8	240 VAC	EA	1

Potential Relays

The Potential Relay has SPST NC configurations and offers a variety of mounting positions.



DPR063

CATALOG NO.	COIL VOLTAGE	PICK-UP		DROP-OUT MAX	UOM	ORDER MULTIPLE
		MIN	MAX			
DPR063	168	140	153	45	EA	1
DPR064	395	242	272	140	EA	1
DPR065	332	171	184	90	EA	1
DPR066	395	223	252	130	EA	1
DPR067	420	300	328	121	EA	1
DPR068	502	314	342	135	EA	1
DPR069	395	180	195	105	EA	1

General Purpose Switching Relays

The Switching Relay has quick connect terminals for termination. The base is designed for easy replacement of competitive relays.



D-90340

CATALOG NO.	COIL VOLTAGE	TERMINALS 1-2-3	TERMINALS 4-5-6	UOM	ORDER MULTIPLE
D-90340	24	POWER	POWER	EA	1
D-90341	110/120	POWER	POWER	EA	1
D-90342	208/240	POWER	POWER	EA	1

FAN CENTERS

The fan centers offer low voltage for one and two speed fan motors; auxiliary circuits in heating cooling, or heating/ cooling applications. This has a DPDT Relay and is UL rated. There are color coded pre stripped leads on this center. This product has a 24V coil voltage, power, and duty rated contacts. It mounts directly to a 4in. electrical box.



D-90113

CATALOG NO.	VOLTAGE	UOM	ORDER MULTIPLE
D-90113	120	EA	1
D-90118	208/240	EA	1

FUSES**Dual Element Fuses – 250V**

Provides time delay for temporary over current conditions and motor running protection for heating and air conditioning equipment. Eliminates unnecessary maintenance from harmless overloads. U.L. Class RK 5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

**7-CRNR40**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-CRNR15	15 Amps	EA	10
7-CRNR20	20 Amps	EA	10
7-CRNR25	25 Amps	EA	10
7-CRNR30	30 Amps	EA	10
7-CRNR35	35 Amps	EA	10
7-CRNR40	40 Amps	EA	10
7-CRNR45	45 Amps	EA	10
7-CRNR50	50 Amps	EA	10
7-CRNR60	60 Amps	EA	10

U.L. Class RK-5, Standard for Safety 198E, Current Limiting Fuses, Interrupting Rating 200,000 Amps. rms. A.C.

Time Delay Fuses – 600V

These plugs offer safe protection during momentary overload. No adapter necessary. U.L. Listed.

**626-HASR15**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-HASR10	10 Amp	EA	10
626-HASR15	15 Amp	EA	10
626-HASR20	20 Amp	EA	10
626-HASR25	25 Amp	EA	10
626-HASR30	30 Amp	EA	10

U.L. Listed.

Plug Fuses

Expels gases caused by the blowing fuse, but doesn't allow flame to escape. Glass top for safety against shock. Positive visual indication of OK condition or blown condition. Distinguishes between overload and dead short conditions. Magnifying center of face. Shapes of face openings identify ratings. Meets Federal Specification WF 791E/Gen. Type 791/1. Base "W" fuses. U.L. Listed.

**626-30**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-15	Plug Fuse Type TL – 15 Amp	EA	4
626-20	Plug Fuse Type TL – 20 Amp	EA	4
626-25	Plug Fuse Type TL – 25 Amp	EA	4
626-30	Plug Fuse Type TL – 30 Amp	EA	4

U.L. Listed.

One Time Fuses

Protection to lighting, heating, and other non transient circuits. U.L. Class H, Standard for Safety 1988, One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C.


**7-10KOTN40**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-10KOTN30	30 Amps	EA	10
7-10KOTN35	35 Amps	EA	10
7-10KOTN40	40 Amps	EA	10
7-10KOTN45	45 Amps	EA	10
7-10KOTN50	50 Amps	EA	10
7-10KOTN60	60 Amps	EA	10

U.L. Class H, Standard for Safety 1988, One Time Fuse Interrupting Rating 10,000 Amps. rms. A.C.

Time Delay Plug Fuses

These plugs offer safe protection during momentary overload. No adapter necessary. U.L. Listed.


**626-30T**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-10T	Type "T" Plug Fuse – 10 Amp	EA	4
626-15T	Type "T" Plug Fuse – 15 Amp	EA	4
626-20T	Type "T" Plug Fuse – 20 Amp	EA	4
626-25T	Type "T" Plug Fuse – 25 Amp	EA	4
626-30T	Type "T" Plug Fuse – 30 Amp	EA	4

U.L. Listed.

Type "S" Non-Tamper Fuses

Provides specific overcurrent protection. Time delay element protects against premature blowing from motors in air conditioners or compressors. Visual indication of good or blown condition. U.L. Listed. C.S.A. Approved.

**626-30S**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-3S	Type "S" Fuse – 3.2 Amp	EA	4
626-4S	Type "S" Fuse – 4 Amp	EA	4
626-5S	Type "S" Fuse – 5 Amp	EA	4
626-6S	Type "S" Fuse – 6.25 Amp	EA	4
626-10S	Type "S" Fuse – 10 Amp	EA	4
626-15S	Type "S" Fuse – 15 Amp	EA	4
626-20S	Type "S" Fuse – 20 Amp	EA	4
626-25S	Type "S" Fuse – 25 Amp	EA	4
626-30S	Type "S" Fuse – 30 Amp	EA	4

U.L. Listed. C.S.A. Approved.

FUSES cont'd

In-Line Fuse Holder

For fusing all control circuits up to 30 amp. Features rigid plastic protective covering for each fuse. Used on AC and DC circuits. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FH-1	In-Line Fuse Holder	EA	10

U.L. Listed.

Fuse Pullers


Our fuse pullers are used to safely pull fuses



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38071	Fuse Puller – For Fuse Sizes 1/4" to 1/2"	EA	1
626-38073	Fuse Puller – For Fuse Sizes 1" to 1-3/4"	EA	1

Fuseblocks

The fuse blocks are designed to allow the fuse to blow or burn out before the component can be damaged.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-23133	Fuseblock – 1 Pole Screw Class H, 250V	EA	1
626-23233	Fuseblock – 2 Pole Screw Class H, 250V	EA	1
626-23333	Fuseblock – 3 Pole Screw Class H, 250V	EA	1
626-26311	Fuseblock – 3 Pole Box Lug Class H, 250V	EA	1

Blade (Auto) Fuses


These fuses are fast acting low voltage supplementary fuses, automotive blade style fuse.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-AT0003	Blade Fuse – 3 Amp – Purple, pack of 5	EA	100
626-AT0005	Blade Fuse – 5 Amp – Tan, pack of 5	EA	100

Fuse Adapters

Fuse adapters are used to retrofit fuses into existing installations.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
626-38632	Fuse Adapter – 60 to 30 Reducer for Class H, 250V	EA	1
626-38636	Fuse Adapter – 60 to 30 Reducer for Class H, 600V	EA	1

Box Cover Units

The maximum amps on this box cover unit are 15 and the maximum AC voltage of 125. These units are designed for use with the Type T plug fuses. U.L. Listed and C.S.A. Certified.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-608	Switch/Fuse Combo (ESSU)	EA	1
620-6081	Plug Fuse Base Only (ESOU)	EA	1
620-6082	Receptacle/Fuse Combo (ESRU)	EA	1
620-6083	Switch/Fuse Combo Square (ESSY)	EA	1

U.L. Listed and C.S.A. Certified.

TIME DELAYS

Adjustable Delay on Break Timer

Adjusts from 6 seconds to 8 minutes. Spin-proof knob. Works with 24, 120 or 240 VAC control circuits. Supports up to 1.0 Amps. Two wire hookup for easy installation. Solid state with quick disconnect terminals. Mounts with one self-tapping screw. Conformal coated circuitry protects against moisture and shock. UR recognized for USA and Canada. Works with anticipator type thermostats.

HOW IT WORKS: Immediately upon application of power, the Delay on Break timer enables circuit operation. Once power is interrupted, the circuit opens for the time set on the dial. After the time period elapses, the circuit closes, allowing the protected motor or compressor to start. For typical HVAC applications, the operation of the timer is transparent and will go unnoticed.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ADB-1	Adjustable Delay on Break	EA	1
ADB-2	Adjustable Delay on Break w/Wire Leads	EA	1

Adjustable Delay on Make Timer

Ideal for random starting of multiple units. Adjusts from 6 seconds to 8 minutes. Spin proof knob. Works with 24, 120 or 240 VAC control circuits. Supports up to 1.0 Amps. Two wire hookup for easy installation. Solid state with quick-disconnect terminals. Mounts with one self-tapping screw. Conformal coated circuitry protects against moisture and shock. UR recognized for US and Canada. Works with anticipator type thermostats.

HOW IT WORKS: These timers delay circuit closure upon application of power. Only after the set time period elapses and power remains ON will the circuit close, allowing the protected motor or compressor to start. For typical HVAC installations, timers are adjusted to random times to prevent power circuit overloads, thus are often called random start timers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ADM-1	Adjustable Delay on Make	EA	1
ADM-2	Adjustable Delay on Make w/Wire Leads	EA	1

MONITORS

Digital Three Phase Line Voltage Monitor

Offers continuous protection against voltage anomalies which can damage compressors, motors and other sensitive electrically operated devices.

PROTECTION: Loss of Phase, Phase Reversal, Voltage Imbalance, Low Voltage, High Voltage

DISPLAY: Large custom LCD display indicates all operating conditions at a glance. Three large sets of digits provide easy system troubleshooting.

VOLTMETER: Three independent voltmeters read both line and contactor load (backside) voltages.

MONITORED VOLTAGE: 160 to 600 Volts 50-60 Hz.

POWER SUPPLY: Power for the WPC-500 is automatically derived from any active phase. System operation is not dependent on the control voltage or a specific phase for power.

CONTROL VOLTAGE: 19-277 VAC. Anticipator load is provided for operation with 24 volt electronic and mechanical thermostats.

OPERATING VOLTAGE SET POINT: 175 to 650 VAC. Digitally adjustable in one volt increments.

VOLTAGE TRIP POINT: Adjustable in 1% increments between 6% and 18% of selected operating voltage. Restart voltage set point (hysteresis) fixed at cutout voltage + 3%.

VOLTAGE SYMMETRY: Adjustable imbalance trip point from 2% to 25% of selected operating voltage.

RESPONSE TIMES:

Phase Loss/Reversal: 100 mS max.

Imbalance: Adjustable Response Timer

Over or Under Voltage: Adjustable Response Timer

LOCKOUT DELAY TIMER: Fully adjustable 0 to 720 Seconds (0 to 12 minutes). Digital display shows re-remaining time and user set points.

SEQUENTIAL START TIMER: 0 to 30 seconds in one second increments.

RESPONSE TIMER: 0.1 to 20 Seconds. Digital display shows remaining time and user set points.

MEMORY: Up to 25 past fault conditions are stored for later retrieval and analysis. The faults may be displayed or cleared by the front panel buttons.

**DTP-3****Digital Single Phase Line Voltage Monitor**

Automatic voltage monitor and control system. Continuously measures incoming line voltage, allowing detection of any voltage outside the tolerances that you set. If these limits are exceeded, the response timer begins counting. You may also set response time – a short time for a quick response or a long time to avoid nuisance tripping. If the voltage remains outside the tolerance after the time has elapsed, the DSP-1 will turn off its output relay and protect your device. While output is off, an additional delay timer activates to avoid rapid restarts.

FEATURES:

Digital voltmeter displays instantaneous line voltage;

Automatic voltage tester adjusts from 90 to 300 volts;

Adjustable response timer (0.1 to 10 sec.) prevents nuisance tripping;

Adjustable delay timer (1 to 720 sec.) prevents rapid restarts;

Digital display makes for easy viewing and operation

SPECIFICATIONS:

Voltmeter: 70 to 325 Volts

Voltage Set Point: 90 to 300 Volts

Tolerance Limits: 6 to 18%

Response Timer: 0.1 to 10 seconds

Delay Timer: 1 to 720 seconds

Output Relay: 10 Amps, 250 VAC resistive, single-pole/double-throw

Control Input: 18 to 250 VAC with anticipator load for 24 volt thermostats


**DSP-1**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DTP-3	Digital 3-Phase Motor Protector	EA	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DSP-1	Digital Single Phase Motor Protector	EA	1

Compressor Heaters, U.L. listed, CSA certified

Extends the life of air conditioners and refrigeration compressors. Corrosion resistant exterior. High temperature silicone rubber element and insulated leads. Voltages through 600. Wattage for each model matches compressor requirements. Moisture proof, easy to install. Nominal power consumption. UL listed, CSA certified.



CATALOG NO.	RATED VOLTS	RATED WATTS	FITS COMPRESSOR	GIRTH DIMENSIONS		SHAPE	UOM	ORDER MULTIPLE
				MIN.	MAX.			
CH-100	240	50	Bendix/Westinghouse: C, D	30-3/16"	37"	OVL	EA	1
CH-100-3	480		Copeland: Y Hitachi: 753FH3-H, 1001FH4-H Tecumseh: B, C, CL, AG, AV Carlisle: W (70-88)				EA	1
CH-101	240	54	Aspera: H	27-7/16"	34-1/4"	OVL	EA	1
CH-101-2	120		Bristol/Sunstrand: H10A, H21A,				EA	1
CH-101-3	480		Carrier: 6A25, 26, 28, 29, 6A35, Copeland: CR				EA	1
CH-102	240	60	Aspera: J	25-3/4"	32-9/16"	OVL	EA	1
CH-102-2	120		Bristol/ Sunstrand: H10C, H20C,				EA	1
CH-196	240	40	Copeland	19-7/8"	26-5/8"	RND	EA	1
CH-196-2	120		6" Scroll				EA	1
CH-196-3	480						EA	1
CH-230	240	70	Copeland	21-5/8"	28-1/2"	RND	EA	1
CH-230-3	480		7-1/2" Scroll				EA	1
CH-230-6	575						EA	1
CH-103	240	45	Bendix/Westinghouse: A	24-3/4"	31-9/16"	OVL	EA	1
CH-103-2	120		Copeland: RR, SR Tecumseh: AB, AW				EA	1
CH-104	240	75	Bristol/Sunstrand: H10G, H20G,	41-1/2"	48-5/16"	RND	EA	1
CH-104-3	480		Carrier: 6A88				EA	1
CH-105	240	50	Copeland: VR Trane: D4340/7670 Westinghouse: CD072, CD090	32-1/2"	39-5/16"	RND	EA	1
CH-135	240	45	Copeland: JR	20-5/16"	27-1/8"	OVL	EA	1
CH-135-2	120		Tecumseh: AK				EA	1
CH-197	240	25	Fedders/Chrysler: 2870908 Sanyo: CR15F, CR20F, CR33F	13-3/4"	20-9/16"	RND	EA	1
CH-202-3	480	70	Copeland: BR	33-3/4"	36-3/4"	RND	EA	1
CH-280	240	70	Copeland 7.25 Scroll	20-4/5"	28"	RND	EA	1

ELECTRICAL SUPPLIES

Electrical Toggle Switches

Side wire design with automatic grounding and large binding head terminal screws for fast wiring. Lubricated cam provides smooth lever action. U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E




620-601

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-600	20A-1 HP 120V, Single Pole, Brown	EA	10
620-601	20A-1 HP 120V, Single Pole, Ivory	EA	10
625-CS120W	20A-1HP 120V Single Pole, White	EA	10
620-602	20A-1 HP 120V, 3-Way, Brown	EA	10
620-603	20A-1 HP 120V, 3-Way, Ivory	EA	10
625-1301W	15A-1/2HP 120V Single Pole, White	EA	10
620-604	15A-1/2 HP 120V, Single Pole, Brown	EA	10
620-605	15A-1/2 HP 120V, Single Pole, Ivory	EA	10
620-606	15A-1/2 HP 120V, 3-Way, Brown	EA	10

U.L. Listed. C.S.A. Certified. Verified to Federal Spec. WS896E.

Electrical Outlet Boxes, Extensions and Covers

We have 4in. steel octagon boxes, extensions, and covers available. Conforms to Article 370 of NEC. U.L. Listed.

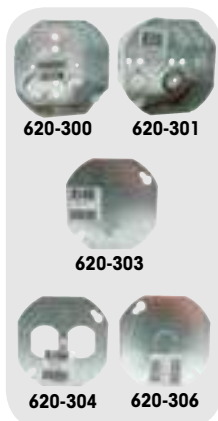

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-300	1-1/2" Deep, 1/2" and 3/4" K.O.s	EA	50
620-301	2-1/8" Deep, 1/2" and 3/4" K.O.s	EA	25
620-303	Flat Blank Cover	EA	50
620-304	Flat, Duplex Receptacle Cover	EA	50
620-306	Flat Cover 1/2" K.O. in Center	EA	50

Conforms to Article 370 of NEC. U.L. Listed.

Electrical Outlet Boxes, Extensions and Covers

We have 4 11/16in. steel square boxes, extensions, and covers available. Conforms to Article 370 of NEC. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-500	2-1/8" Deep, 1/2" and 3/4" K.O.s	EA	25
620-502	Raised Cover for Single Device	EA	25

Conforms to Article 370 of NEC. U.L. Listed.

Electrical Duplex Receptacles

Automatic grounding for fast installation. Heavy duty mounting strap for additional assembly strength. Copper alloy power/ground contacts for optimum continuity. Side wire design with large binding head terminal screws for fast wiring. U.L. Listed. C.S.A. Certified (NEMA 5 15 Type).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-700	15A, 125V, Brown	EA	10
620-701	15A, 125V, Ivory	EA	10
625-CR15W	15A 125V, White	EA	10
620-702	20A, 125V, Brown	EA	10
620-703	20A, 125V, Ivory	EA	10
625-CR20W	20A 125V, White	EA	10
620-704	15A, 125V, Brown – Residential	EA	10
620-705	15A, 125V, Ivory – Residential	EA	10
625-270W	15A 125V, White – Residential	EA	10

U.L. Listed. C.S.A. Certified (NEMA 5-15 Type).

Electrical Outlet Boxes, Extensions and Covers

We have 4in. steel square boxes, extensions, and covers available. Conforms to Article 370 of NEC. U.L. Listed.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-400	1-1/4" Deep, 1/2" K.O.s	EA	50
620-401	2-1/8" Deep, 1/2" and 3/4" K.O.s	EA	25
620-403	1-1/2" Deep, 1/2" K.O.s	EA	50
620-404	1-1/2" Deep, 1/2" and 3/4" K.O.s Extension	EA	50
620-405	Flat Cover 1/2" K.O. in Center	EA	50
620-406	Flat Blank Cover	EA	50
620-408	Flat, One Toggle Switch Cover	EA	50
620-409	Flat, One Duplex Receptacle Cover	EA	50
620-411	One Switch and One Duplex Receptacle Cover	EA	50

Conforms to Article 370 of NEC. U.L. Listed.

Electrical Outlet Boxes, Extensions and Covers

Standard steel utility (Handy) boxes and covers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-200	1-1/2" Deep, 1/2" K.O.s	EA	50
620-201	1-7/8" Deep, 1/2" K.O.s	EA	50
620-202	2-1/8" Deep, 1/2" K.O.s	EA	50
620-20134	1-7/8" Deep, 3/4" K.O.s	EA	50
620-252	Flat, Two Duplex Receptacle Cover	EA	100
620-253	Flat, Toggle Switch Cover	EA	100
620-254	Flat Blank Cover	EA	100
620-255	Flat Cover 1/2" K.O.	EA	100

Conforms to Article 370 of NEC. U.L. Listed.

Switch/Plug Combo

Use with air handlers and condensate pumps. Touch-A-Matic design, with exclusive spring loaded steel ball mechanism for smooth, positive contact movement. Small neon pilot light ON when switch is ON, is built-in to the switch on switch/receptacle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-274W	White 2P 3W Grounding—15A 120V	EA	10

U.L. Listed. C.S.A. Approved.

Switch Covers

Our switch covers come with gas, oil, or emergency already printed on them.



CATALOG NO.	SIZE	TYPE	DESCRIPTION	UOM	ORDER MULTIPLE
625-S17	4" X 4"	Gas	4" Square Box	EA	1
625-S16	4-1/4" X 2-3/4"	Gas	Utility/Handy Box	EA	1
625-S15	4-1/2" X 2-1/2"	Gas	Flush Mount	EA	1
625-S14	4" X 4"	Oil	4" Square Box	EA	1
625-S13	4-1/4" x 2-3/4"	Oil	Utility/Handy Box	EA	1
625-S19	4-1/2" X 2-1/2"	Oil	Flush Mount	EA	1
625-S20	4-3/4" X 2-1/2"	Emergency	Switch Plate	EA	1
625-S21	4-1/4" X 2-7/10"	Emergency	Switch Plate	EA	1
625-S18	3/4"		Switch Guard (Wall plate/ switch not included)	EA	1

Homeline Circuit Breakers

Homeline circuit breakers provide the high level of protection you expect from Square D. No other name in circuit protection is more trusted for reliability and performance than Square D. These are the only breakers accepted in genuine Square D Homeline Load Centers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-GS15H	Single Pole, 15A	EA	10
625-GS20H	Single Pole, 20A	EA	10
625-GS30H	Single Pole, 30A	EA	10
625-GS40H	Single Pole, 40A	EA	10
625-GS50H	Single Pole, 50A	EA	10
625-GD15H	Two Pole, 15A	EA	10
625-GD20H	Two Pole, 20A	EA	10
625-GD30H	Two Pole, 30A	EA	10
625-GD40H	Two Pole, 40A	EA	10
625-GD50H	Two Pole, 50A	EA	10
625-GD60H	Two Pole, 60A	EA	10
625-GD100	Two Pole, 100A	EA	10

Plastic Wall Plates

Non flammable thermoplastic, phenolic or urea material. Color matched 1/2in. long steel mounting screws furnished. Smooth surface – no recessed areas to collect dirt, discolor. Easy to clean. Full weight and thickness provide high dielectric strength, minimum moisture absorption, impact resistance. Warp resistant, fit flush to wall. U.L. Listed. C.S.A. Approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-2139W	Double Toggle Cover – White	EA	10
625-2132B	Duplex Receptacle Cover – Brown	EA	25
625-2132V	Duplex Receptacle Cover – Ivory	EA	25
625-2132W	Duplex Receptacle Cover – White	EA	10
625-2134B	Single Toggle Cover – Brown	EA	25
625-2134V	Single Toggle Cover – Ivory	EA	25
625-2134W	Single Toggle Cover – White	EA	25

U.L. Listed. C.S.A. Approved.

ELECTRICAL SUPPLIES *cont'd*

Toggle Switches

These switches are available in single pole double pole. They are UL listed and furnished with screw terminals. The ratings are A:20A 125VAC, 20 250 VAC, 1 HP at 120 240 V and B 15A 125/250 VAC, ¾ HP at 240 V.

TS-1



CATALOG NO.	DESCRIPTION	RATING	UOM	ORDER MULTIPLE
TS-1	Toggle Switch – SP-ST – ON/OFF	A	EA	1
TS-3	Toggle Switch – SP-DT-CO – ON/OFF/ON	B	EA	1
TS-4	Toggle Switch – SP-ST – ON/OFF	A	EA	1
TS-5	Toggle Switch – DP-DT – ON/OFF	A	EA	1

Toggle Switch Cover

Weatherproof body for toggle switches up to 15/16" long.

625-B1



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-B1	Toggle Switch Cover	EA	5

Power Supply Cord (Pigtails)

Stranded bare copper conductors. Grounding conductors. PVC jacket. Right and straight angle male plug. 110 Volt. 16 AWG x 6' long. SPT 2.

625-16-6



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
625-16-6	Power Supply Cord – Straight Plug	EA	50
625-16-690	Power Supply Cord – 90 Degree Plug	EA	50

ELECTRICAL TAPES

Scotch 3M Super 33+ Electrical Tape

Premium grade, 7 mil thick, all-weather vinyl insulating tape. Performs continuously in a temperature ambient of up to 220°F and as low as 0°F. Resealable plastic case. Made in USA.

ET33



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET33	Super 33+ Electrical Tape – 3/4" x 66'	EA	10

Scotch 3M Super 88 Electrical Tape

Premium grade, 8.5 mil thick, all-weather vinyl insulating tape. Performs continuously in a temperature ambient of up to 220°F and as low as 0°F. Excellent resistance to abrasion, moisture, acids and corrosion. Packaged in a resealable plastic case. Made in the USA.

ET44




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET44	Super 88 Electrical Tape – 3/4" x 66'	EA	10

Scotch 35 Vinyl Electrical Tape

This 7 mil premium grade electrical vinyl tape stretches to conform to virtually any shape that requires color-coded insulation. Abrasion and weather resistant. Measures 3/4" x 66'.

ET35N



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ET35N	Vinyl Electrical Tape – Orange	EA	10
ET35G	Vinyl Electrical Tape – Green	EA	10
ET35R	Vinyl Electrical Tape – Red	EA	10
ET35W	Vinyl Electrical Tape – White	EA	10

Economy Electrical Tape

This tape is suitable for use up to 175 F (80C) and not more than 600V. The electrical tape is excellent for adhesion and UL listed.

6-3460



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-3460	3/4" x 60' Economy Electrical Tape	EA	10

Glass Cloth, Moisture Sealing, and Economy Electrical Tapes

This is a woven glass cloth tape designed to operate in 600 volt dry applications, requiring high mechanical strength and resistance to high temperatures. The glass cloth is specially treated and prepared to provide corrosion free protection. It will not shrink, rot, or burn and has a high tensile strength. It contains pressure sensitive thermosetting adhesive which performs as Class B temperature (266 degrees F / 130 degrees C). Provides heat stable insulation for hot spot applications. Highlight: Color White. Width 1/2in. Length 66 ft. Thickness 7 mil. Tensile Strength (2) 150 lb./in. Material Glass Cloth.

GC275



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GC275	1/2" x 66' Glass Cloth Electrical Tape by 3M	EA	10
GC277	3/4" x 66' Glass Cloth Electrical Tape by 3M	EA	10
ET130C1	1" x 30' Moisture Sealing Splicing Tape by 3M	EA	24
ET22	3/4" x 66' Hiawatha Electrical Tape by 3M	EA	10
AT-1700	3/4" x 66' TemFlex™ by 3M	EA	10

Compressor Repair Kit

Finally, a product that simplifies the repair of burned or damaged spade terminals when reconnecting or replacing a compressor. Fits both non burned and burned terminals. Connects to the compressor via precision brass cylinders that fit over the terminals and connect with stainless steel set screws. Wires are permanently attached. Standard factory 600V, 65 strand machine wire. Easy to install and guaranteed for the life of the compressor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TLC-3-8	3 Wire, 8 Gauge Connection Kit	EA	1
TLC-3-10	3 Wire, 10 Gauge Connection Kit	EA	1
TLC-3-12	3 Wire, 12 Gauge Connection Kit	EA	1

Replacement Compressor Leads

Extreme heat within compressors typically causes failure of wiring insulation. This can cause corrosion to the inner strands of copper within the wire used for compressor hook up. This reduces the power flow to the compressor causing the unit to overheat and can prevent the compressor from starting. A MINIMUM of 12in. of wire must be removed. The DiversiTech Replacement Compressor Leads are ideal for replacing this corroded wiring. 24in. leads also available for replacing wire all the way to the contactor and capacitor.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CC33	Compressor Leads – 12" with Butt, pack of 3	PK	1
CC33-18	Compressor Leads – 18" with Butt, pack of 3	PK	1
CC33-24	Compressor Leads – 24" with Ring, pack of 3	PK	1

Grommets – Vinyl (By Panel Hole Size)

Grommets safely route cables and wires through sharp edged cutouts.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GV04	Grommets – 1/4", pack of 18	PK	1
GV05	Grommets – 5/16", pack of 15	PK	1
GV06	Grommets – 3/8", pack of 13	PK	1
GV07	Grommets – 7/16", pack of 12	PK	1
GV08	Grommets – 1/2", pack of 12	PK	1
GV10	Grommets – 5/8", pack of 7	PK	1
GV12	Grommets – 3/4", pack of 3	PK	1
GV14	Grommets – 7/8", pack of 4	PK	1
GV16	Grommets – 1", pack of 4	PK	1
GVA1	Assortment – Small – GV04, GV05, GV06, GV07, GV08, pack of 15	PK	1
GVA2	Assortment – Large – GV08, GV10, GV12, GV14, GV16, pack of 5	PK	1

Sizes shown above also available in 100 packs.

Transparent Plastic Boxes with Terminal Assortments


Boxes are made of soft, pliable, durable K resin with 18 compartments containing the most popular terminals, including hi temp and compressor terminals.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PA10	180 Terminals (10 Each Kind)	EA	1
PA25	360 Terminals (20 Each Kind)	EA	1
PA25AP	Appliance Parts Technician Assortment (mostly Hi-Temp)	EA	1
PA18	"K" Resin Plastic Box Only	EA	1

Compartmented Storage Boxes

These boxes can be used to store your compressor terminals, nylon ties and clamps.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MB21	21 Compartmented Metal Box	EA	1
MB22	21 Compartmented Metal Box w/230 popular EA items including hi-temp and compressor terminals, nylon ties and clamps	EA	1

Heat Shrink Tubing – Polyolefin 50% Shrink, Black Commercial Grade

Our shrinking tube is economical and mechanically tough heat shrinkable tubing used for insulating, jacketing and identification.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS03	3/16" I.D. Expanded – 4" Long, pack of 8	PK	1*
HS04	1/4" I.D. Expanded – 4" Long, pack of 7	PK	1*
HS06	3/8" I.D. Expanded – 4" Long, pack of 6	PK	1*
HS08	1/2" I.D. Expanded – 4" Long, pack of 5	PK	1*
HS012	3/4" I.D. Expanded – 4" Long, pack of 4	PK	1*
HS16	1" I.D. Expanded – 4" Long, pack of 3	PK	1*
HS24	1.5" I.D. Expanded – Per Foot	EA	1'
HS32	2" I.D. Expanded – Per Foot	EA	1'
HSA1	Assorted 3/16", 1/4", 3/8" – 4" Long, pack of 7	PK	1
HSA2	Assorted 1/2", 3/4", 1" – 4" Long, pack of 4	PK	1

Available in lengths up to 250 ft.

*These items are also available in bulk. To order, enter the catalog number followed by the letter "B". For example, HS03B is the bulk part number for HS03. Bulk items are priced and shipped by the foot.

THERMAL CONTROLS

Fusible Links

Fusible Links are temperature sensitive, one time devices. Engineered as safety links, they open the circuit if the designed limit temperature is reached.

CATALOG NO.	FUSIBLE TEMP °F	TYPE	PRONG TYPE	QTY/PACK	UOM	ORDER MULTIPLE
HFL-4257	257°	In-Line		pack of 4	PK	1
HFL-4300	300°	In-Line		pack of 4	PK	1
HFL-4333	333°	In-Line		pack of 4	PK	1
HFL-5257	257°	Face Plate	Straight	pack of 2	PK	1
HFL-5258	257°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5300	300°	Face Plate	Straight	pack of 2	PK	1
HFL-5301	300°	Face Plate	Right Angle	pack of 2	PK	1
HFL-5333	333°	Face Plate	Straight	pack of 2	PK	1

HFL-4257



HFL-5257

Replacement Element Kits

Field repair damaged element sections of electric heaters. Each kit contains a specific KW replacement element, two ceramic terminal insulator sets, plated bolts, nuts and washers.

CATALOG NO.	WATTAGE AT		IN PLACE LENGTH (INCHES)		UOM	ORDER MULTIPLE
	240V	208V	MINIMUM	MAXIMUM		
HEK-100	1000	750	14"	35"	EA	1
HEK-200	2000	1500	26"	65"	EA	1
HEK-400	4000	3000	45"	135"	EA	1
HEK-500	5000	3750	54"	162"	EA	1

HEK-100



Sequencers

The sequencers are used in electric heat systems to stage blower motors and heating elements. All sequencers are for 24V control.

CATALOG NO.	NO. CIRCUITS	KILXON NO.	SWITCH CONFIGURATION	DELAY ON TIME MIN.-MAX. SECONDS	DELAY OFF TIME MIN.-MAX. SECONDS	UOM	ORDER MULTIPLE
HDR-101	1 Main	60000A0211	SPST-NO	1-24	45-75	EA	1
HDR-102	1 Main	60000A0147	SPST-NO	30-75	1-40	EA	1
HDR-201	2 Main	60000E0110	DPST-NO	1-24	45-75	EA	1
HDR-202	2 Main	60000E0109	DPST-NO	30-70	1-40	EA	1
HDR-211	2 Main Staged	60200A0117	DPST-NO	30-110	1-40	EA	1
HDR-212	2 Main Staged	60200A0127	DPST-NO	1-25	50-110	EA	1
HDR-221	3 Main Staged	51172-131-1	DPST-NO SPST-NO	1-25	50-110	EA	1
HDR-222	4 Main Staged	51172-131-2	2 DPST-NO	1-40	50-110	EA	1

HDR-101




Manual Reset Fire Stat

This bi metal switch is used as a manual reset. When temperature condition is met, the device opens. The manual reset can only be reset after proper cool down of the switch. The HMR 130 is a popular fire stat in ducted air distribution systems. Should temperatures in the duct exceed 130 degree F, the switch opens, shutting down the whole system so no fire or smoke can be spread by the fan.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HMR-130	Bi-metal Manual Reset Fire Stat	EA	1

HMR-130



THERMOSTATS

LuxPro Thermostats

LuxPro thermostats are designed to be a reliable, simple solution to in home comfort, so that everyone can enjoy the benefits and comforts of advanced temperature control. Diversitech offers a variety of LuxPro models and options to match any installation need.



675-P521U

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
675-P521U	5-2 program, 2 H/1 C, Programmable	EA	1
675-P621U	5-1-1 program, 2 H/1 C, Programmable	EA	1
675-P721UT	7 Day, 2 H/1 C, Programmable, Touchscreen	EA	1
675-P722U	7 Day, Programmable, 2 H/2 C for Conventional, 2 H/1 C for Heat Pumps	EA	1
675-PSD010BF	Digital for Heat Only, with Fan Switch	EA	1
675-PSD111	1 H/1 C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSDH121	1 or 2 H/C, Non-Programmable, Vertical/Horizontal	EA	1
675-PSM30SA	Heat Only Mechanical	EA	1
675-PSM40SA	Heating & Cool Mechanical	EA	1
675-PSP722E	3 H/2 C, Programmable for Heat Pumps, 2 H/2 C for Conventional	EA	1

THERMOSTAT GUARDS

Plastic Thermostat Guards

Use to prevent tampering with thermostats. The covers are clear, allowing complete viewing of the thermostat and current settings. Furnished complete with ring and/or solid base. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



585-TG1

CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG	Clear Plastic w/Two Bases	8-1/4" x 4-1/2" x 3-1/4"	EA	1
585-TG1	Clear Plastic w/Two Bases	5-3/4" x 3-1/2" x 2-3/4"	EA	1
585-TG2	Clear Plastic w/Two Bases	4-3/4" x 4-1/4" x 2-3/4"	EA	1
585-TG5	Clear Plastic w/Solid Base	3-1/2" x 3-1/4" x 2-1/4"	EA	1
585-TG6	Clear Plastic w/Two Bases	6-1/4" x 3-3/4" x 1-3/4"	EA	1
585-F336	Key for Thermostat Guard		EA	1

Steel Thermostat Guards

Steel thermostat guards are used to prevent tampering with thermostats. The covers are steel, giving complete tamper protection of the thermostat, and physical impact protection. Great for warehouse and industrial locations. Furnished complete with ring and/or solid base as noted. Includes vent holes for easy airflow across the thermostat. Lockable with universal key. Internal dimensional clearance/sizing for thermostats as noted.



585-TG4

CATALOG NO.	DESCRIPTION	T-STAT CLEARANCE	UOM	ORDER MULTIPLE
585-TG3	Beige Steel w/Solid Base	6" x 4" x 3"	EA	1
585-TG4	Beige Steel w/Ring Base	6" x 4" x 3"	EA	1
585-TG7	Beige Steel w/Solid Base	5-1/2" x 3-1/2" x 2-3/4"	EA	1
585-TG8	Beige Steel w/Ring Base	5" x 3" x 2-3/4"	EA	1
585-TG9	Beige Steel w/Two Bases	6" x 4" x 3"	EA	1

Cross Reference

DIVERSITECH PART NO.	BEKO PART NO.	BRAMEC PART NO.	MARS PART NO.
585-TG	BTG-UK2	13012	70220
585-TG1	BTG-RK	13016	70210
585-TG2	BTG-K	13008	70205
585-TG3	BTG-UM	13010	70223
585-TG4	BTG-UWM	13011	70224
585-TG5	BTG-EK	13004	70201
585-TG6	BTG-DK	13018	70217
585-TG7	BTG-54VL	13002	70215
585-TG8	BTG-54VLW	13001	70216

THERMOSTAT WIRE

Thermostat Wire

Class 2 thermostat wire for indoor wiring needs. Soft drawn bare copper wire, semi rigid PVC insulation and PVC overall jacket. Packaged on aluminum spool.



620-18-5

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-4	18 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-18-5	18 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-18-6	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-7	18 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-18-8	18 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-18-9	18 AWG, 9 Conductors – 250 ft. Spool	EA	4
620-18-10	18 AWG, 10 Conductors – 250 ft. Spool	EA	4
620-18-12	18 AWG, 12 Conductors – 250 ft. Spool	EA	4
620-20-2	20 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-20-3	20 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-20-4	20 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-20-5	20 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-20-6	20 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-20-7	20 AWG, 7 Conductors – 250 ft. Spool	EA	4
620-20-8	20 AWG, 8 Conductors – 250 ft. Spool	EA	4
620-20-10	20 AWG, 10 Conductors – 250 ft. Spool	EA	4

U.L. Listed. Meets Subject 13 per Article 725, 1990 NEC.

Plenum Thermostat Wire

The Plenum Thermostat Wire is UL Listed type CL2P- NEC Article 725 and is designed for use in thermostat control applications.




620-18-5P

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
620-18-2P	18 AWG, 2 Conductors – 500 ft. Spool	EA	4
620-18-3P	18 AWG, 3 Conductors – 500 ft. Spool	EA	4
620-18-4P	18 AWG, 4 Conductors – 250 ft. Spool	EA	4
620-18-5P	18 AWG, 5 Conductors – 250 ft. Spool	EA	4
620-18-6P	18 AWG, 6 Conductors – 250 ft. Spool	EA	4
620-18-8P	18 AWG, 8 Conductors – 250 ft. Spool	EA	4

Wire for Mini-Split Installation

Wire and cabling specific for mini split installation power supply and control circuits.



230-18-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-18-4	Stranded Shielded CL3R, 50' per roll	EA	1
230-16-2	Stranded Shielded CL3R, 50' per roll	EA	1
230-14-4	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-7	Stranded Non-Shielded CL3R, 50' per roll	EA	1
230-14-4S	Stranded Shielded CL3R, 50' per roll	EA	1

STRANDED COPPER THHN WIRE

Stranded Copper Wire in Clear Dispenser Pack, 194°F

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90C Stranded.



W142

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801	08 Gauge, 10 ft., Black	EA	1
W802	08 Gauge, 10 ft., Red	EA	1
W803	08 Gauge, 10 ft., Green	EA	1
W804	08 Gauge, 10 ft., Blue	EA	1
W805	08 Gauge, 10 ft., White	EA	1
W101	10 Gauge, 10 ft., Black	EA	1
W102	10 Gauge, 10 ft., Red	EA	1
W103	10 Gauge, 10 ft., Green	EA	1
W104	10 Gauge, 10 ft., Blue	EA	1
W105	10 Gauge, 10 ft., White	EA	1
W121	12 Gauge, 15 ft., Black	EA	1
W122	12 Gauge, 15 ft., Red	EA	1
W123	12 Gauge, 15 ft., Green	EA	1
W124	12 Gauge, 15 ft., Blue	EA	1
W125	12 Gauge, 15 ft., White	EA	1
W141	14 Gauge, 20 ft., Black	EA	1
W142	14 Gauge, 20 ft., Red	EA	1
W143	14 Gauge, 20 ft., Green	EA	1
W144	14 Gauge, 20 ft., Blue	EA	1
W145	14 Gauge, 20 ft., White	EA	1

Stranded Copper Wire on Spool

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90C Stranded. This comes 100 ft. per spool.



W803-100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801-100	08 Gauge, 100 ft. Spool, Black	EA	1
W802-100	08 Gauge, 100 ft. Spool, Red	EA	1
W803-100	08 Gauge, 100 ft. Spool, Green	EA	1
W804-100	08 Gauge, 100 ft. Spool, Blue	EA	1
W805-100	08 Gauge, 100 ft. Spool, White	EA	1
W101-100	10 Gauge, 100 ft. Spool, Black	EA	1
W102-100	10 Gauge, 100 ft. Spool, Red	EA	1
W103-100	10 Gauge, 100 ft. Spool, Green	EA	1
W104-100	10 Gauge, 100 ft. Spool, Blue	EA	1
W105-100	10 Gauge, 100 ft. Spool, White	EA	1
W121-100	12 Gauge, 100 ft. Spool, Black	EA	1
W122-100	12 Gauge, 100 ft. Spool, Red	EA	1
W123-100	12 Gauge, 100 ft. Spool, Green	EA	1
W124-100	12 Gauge, 100 ft. Spool, Blue	EA	1
W125-100	12 Gauge, 100 ft. Spool, White	EA	1
W141-100	14 Gauge, 100 ft. Spool, Black	EA	1
W142-100	14 Gauge, 100 ft. Spool, Red	EA	1
W143-100	14 Gauge, 100 ft. Spool, Green	EA	1
W144-100	14 Gauge, 100 ft. Spool, Blue	EA	1
W145-100	14 Gauge, 100 ft. Spool, White	EA	1

STRANDED COPPER THHN WIRE cont'd

Stranded Copper Wire on Spool

This copper wire is UL listed and THHN wire. It is 19 strand copper and is 600 V as well as 90C Stranded. This comes 50 ft. per spool.

W125-50



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
W801-50	08 Gauge, 50 ft. Spool, Black	EA	1
W802-50	08 Gauge, 50 ft. Spool, Red	EA	1
W803-50	08 Gauge, 50 ft. Spool, Green	EA	1
W804-50	08 Gauge, 50 ft. Spool, Blue	EA	1
W805-50	08 Gauge, 50 ft. Spool, White	EA	1
W101-50	10 Gauge, 50 ft. Spool, Black	EA	1
W102-50	10 Gauge, 50 ft. Spool, Red	EA	1
W103-50	10 Gauge, 50 ft. Spool, Green	EA	1
W104-50	10 Gauge, 50 ft. Spool, Blue	EA	1
W105-50	10 Gauge, 50 ft. Spool, White	EA	1
W121-50	12 Gauge, 50 ft. Spool, Black	EA	1
W122-50	12 Gauge, 50 ft. Spool, Red	EA	1
W123-50	12 Gauge, 50 ft. Spool, Green	EA	1
W124-50	12 Gauge, 50 ft. Spool, Blue	EA	1
W125-50	12 Gauge, 50 ft. Spool, White	EA	1
W141-50	14 Gauge, 50 ft. Spool, Black	EA	1
W142-50	14 Gauge, 50 ft. Spool, Red	EA	1
W143-50	14 Gauge, 50 ft. Spool, Green	EA	1
W144-50	14 Gauge, 50 ft. Spool, Blue	EA	1
W145-50	14 Gauge, 50 ft. Spool, White	EA	1

High Temperature Wire,
400°F (204°C), 600 V.

7 strand tin coated copper wire with silicone rubber insulation protected by a braided fiberglass jacket. Use on the front of all gas furnaces with spark ignition because of flame roll out on start up. Also on all power feeds to electric strip and duct heaters. Also used on all heat producing food preparation equipment.

WHTR14-50



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WHT20	14 gauge, 10 ft. black, 10 ft. white	EA	1
WHTB14-50	14 gauge, black, 50 ft.	EA	1
WHTR14-50	14 gauge, red, 50 ft.	EA	1
WHTW14-50	14 gauge, white, 50 ft.	EA	1
WHTB12-50	12 gauge, black, 20 ft.	EA	1
WHTB12-20	12 gauge, black, 50 ft.	EA	1
WHTB10-20	10 gauge, black, 20 ft.	EA	1
WHTB10-50	10 gauge, black, 50 ft.	EA	1

WIRE CONNECTORS

Wire Connectors—Screw On,
U.L. Listed, C.S.A Approved

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire.

623-002



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-001	Gray Screw-On – Size 71B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-002	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 100	PK	1
623-003	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 100	PK	1
623-004	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-005	Red Screw-On – Size 76B, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-MIX	Wire connector assortment, Pack of 570	PK	1

U.L. Listed. CSA Approved.

Wire Connectors—Winged,
U.L. Listed, C.S.A Approved

Wings give surer grip; offset center design provides great twisting leverage. Expandable square-wire spring instantly adjusts to shape and size to create a strong, vibration-resistant connection. Same tough shell as screw-on type.

623-007



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-000	Lg. Gray Winged – Size 78B, #14 to #8 AWG, 600V Max., pack of 50	PK	1
623-006	Yellow Winged – Size 84, #22 to #10 AWG, 600V Max., pack of 100	PK	1
623-007	Red Winged – Size 86, #18 to #10 AWG, 600V Max., pack of 100	PK	1
623-008	Blue Winged – Size 89, #10 to #6, 600V Max., pack of 50	PK	1

U.L. Listed. C.S.A. Approved.

WIRE CONNECTORS **cont'd****Wire Connectors—Screw On,
U.L. Listed, C.S.A Approved**

Color coded connectors make quick, secure connections for positive continuity. High dielectric thermoplastic shell resists chemical action from hydrocarbons, dilute acid or alkaline solutions. Deep skirt design prevents exposure of bare wire. New handy carry handle and grip bottle. U.L. Listed. C.S.A. Approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
623-012	Blue Screw-On – Size 72B, #22 to #16 AWG, 300V Max., pack of 600	PK	1
623-013	Orange Screw-On – Size 73B, #22 to #14 AWG, 600V Max., pack of 300	PK	1
623-014	Yellow Screw-On – Size 74B, #18 to #10 AWG, 600V Max., pack of 200	PK	1

U.L. Listed. CSA Approved.

Porcelain Wire Connectors

Porcelain Wire Connectors are used in high temperature applications such as appliances.



CATALOG NO.	DESCRIPTION	AWG	UOM	ORDER MULTIPLE
CPN1	Porcelain – Small, pack of 15	22-16, 2 Strand Wire	PK	1
CPN1C	Porcelain – Small, pack of 100	22-16, 2 Strand Wire	PK	1
CPN2	Porcelain – Medium, pack of 10	18-14, 2 Strand Wire	PK	1
CPN2C	Porcelain – Medium, pack of 100	18-14, 2 Strand Wire	PK	1
CPN3	Porcelain – Large, pack of 10	18-14, 3 Strand Wire	PK	1
CPN3C	Porcelain – Large, pack of 100	18-14, 3 Strand Wire	PK	1

**Wire Connectors—Contractor
Packs, U.L. Listed, C.S.A
Approved**

These connectors have a high dielectric thermoplastic shell. These are UL listed and CSA approved. This product is great for making quick and secure connections.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
C222	Closed End Connectors 22-14 W, pack of 18	PK	1
C222C	Closed End Connectors 22-14 W, pack of 100	PK	1
C223	Closed End Connectors 18-10 W, pack of 15	PK	1
C223C	Closed End Connectors 18-10 W, pack of 100	PK	1
C241	Blue Wire Connectors 22-16 W, pack of 20	PK	1
C243	Orange Wire Connectors 22-14 W, pack of 15	PK	1
C245	Yellow Wire Connectors 18-10 W, pack of 13	PK	1
C247	Red Wire Connectors 18-10 W, pack of 10	PK	1
C312	Yellow Winged Wire Connectors, pack of 13	PK	1
C312L	Yellow Winged Wire Connectors, pack of 50	PK	1
C512	Red Winged Wire Connectors, pack of 10	PK	1
C512L	Red Winged Wire Connectors, pack of 50	PK	1

U.L. Listed. CSA Approved.

WIRE/CABLE TIES, MOUNTS, CLAMPS

Cable Tie Assortment Pack


6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32"+ allows operator to adjust strap to any desired tension.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-711	Natural Cable Tie Assortment – 7" and 11", pack of 150	PK	25
7-711-B	Black Cable Tie Assortment – 7" and 11", pack of 150	PK	25
7-5811	Natural Cable Tie Assortment – 5", 8", and 11", pack of 450	PK	30
7-5811-B	Black Cable Tie Assortment – 5", 8", and 11", pack of 450	PK	30

Heavy Duty Cable Ties

6.6 nylon, the heavy duty duct straps feature smooth insertion, and a locking mechanism that gives ductwork a firm hold. Accommodates 7 to 15 inch duct. Tensioning tool for 32"+ allows operator to adjust strap to any desired tension.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-P24	24" Long – Fits up to 6" Duct – 175 lb. Tensile	EA	50
7-P36	36" Long – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P36B	36" Long – Black – Fits up to 10" Duct – 175 lb. Tensile	EA	50
7-P48	48" Long – Fits up to 14" Duct – 175 lb. Tensile	EA	50
7-P48B	48" Long – Black – Fits up to 14" Duct – 175 lb. Tensile	EA	50
7-L300	Tensioning Tool for 120-175 lb. Ties	EA	1

WIRE/CABLE TIES, MOUNTS, CLAMPS *cont'd*

White Nylon Ties with Mounting Hole

These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTM05	White Wire Ties with Mounting Hole – 5" Nylon, pack of 13	18	PK	1
WTM05C	White Wire Ties with Mounting Hole – 5" Nylon, pack of 100	18	PK	1
WTM07	White Wire Ties with Mounting Hole – 7" Nylon, pack of 11	50	PK	1
WTM07C	White Wire Ties with Mounting Hole – 7" Nylon, pack of 100	50	PK	1
WTM11	White Wire Ties with Mounting Hole – 11" Nylon, pack of 6	50	PK	1
WTM11C	White Wire Ties with Mounting Hole – 11" Nylon, pack of 100	50	PK	1
WTM14	White Wire Ties with Mounting Hole – 14" Nylon, pack of 5	50	PK	1
WTM14C	White Wire Ties with Mounting Hole – 14" Nylon, pack of 100	50	PK	1

Black Nylon Ties with Mounting Hole

These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTMB05	Black Wire Ties with Mounting Hole – 5" Nylon, pack of 12	18	PK	1
WTMB05C	Black Wire Ties with Mounting Hole – 5" Nylon, pack of 100	18	PK	1
WTMB07	Black Wire Ties with Mounting Hole – 7" Nylon, pack of 10	50	PK	1
WTMB07C	Black Wire Ties with Mounting Hole – 7" Nylon, pack of 100	50	PK	1
WTMB11	Black Wire Ties with Mounting Hole – 11" Nylon, pack of 6	50	PK	1
WTMB11C	Black Wire Ties with Mounting Hole – 11" Nylon, pack of 100	50	PK	1
WTMB14	Black Wire Ties with Mounting Hole – 14" Nylon, pack of 5	50	PK	1
WTMB14C	Black Wire Ties with Mounting Hole – 14" Nylon, pack of 100	50	PK	1

Wire and Cable Clamps – Nylon

These wire ties are perfect for securing wires. You can choose from an assortment of diameter sizes.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WC02	Wire and Cable Clamps – 1/8" Diameter, pack of 40	PK	1
WC03	Wire and Cable Clamps – 3/16" Diameter, pack of 40	PK	1
WC04	Wire and Cable Clamps – 1/4" Diameter, pack of 35	PK	1
WC05	Wire and Cable Clamps – 5/16" Diameter, pack of 35	PK	1
WC06	Wire and Cable Clamps – 3/8" Diameter, pack of 30	PK	1
WC07	Wire and Cable Clamps – 7/16" Diameter, pack of 30	PK	1
WC08	Wire and Cable Clamps – 1/2" Diameter, pack of 25	PK	1
WC09	Wire and Cable Clamps – 9/16" Diameter, pack of 20	PK	1
WC10	Wire and Cable Clamps – 5/8" Diameter, pack of 20	PK	1
WC12	Wire and Cable Clamps – 3/4" Diameter, pack of 15	PK	1
WC14	Wire and Cable Clamps – 7/8" Diameter, pack of 15	PK	1
WC16	Wire and Cable Clamps – 1" Diameter, pack of 14	PK	1
WCA1	Wire and Cable Clamps Assortment – 1/8" to 1", pack of 26 PK		1

All above sizes are available in 100 packs. Add "C" to the end of the part number.

White Nylon Wire Ties


These wire ties are perfect for securing wires. You can choose from an assortment of sizes.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WT04	White Wire Ties – 4" Nylon, pack of 40	18	PK	1
WT04C	White Wire Ties – 4" Nylon, pack of 100	18	PK	1
WT05	White Wire Ties – 5" Nylon, pack of 35	18	PK	1
WT05C	White Wire Ties – 5" Nylon, pack of 100	18	PK	1
WT07	White Wire Ties – 7" Nylon, pack of 30	50	PK	1
WT07C	White Wire Ties – 7" Nylon, pack of 100	50	PK	1
WT11	White Wire Ties – 11" Nylon, pack of 15	50	PK	1
WT11C	White Wire Ties – 11" Nylon, pack of 100	50	PK	1
WT15	White Wire Ties – 15" Nylon, pack of 12	50	PK	1
WT15C	White Wire Ties – 15" Nylon, pack of 100	50	PK	1
WTA1	White Wire Ties – Assorted 4", 7", and 11" Nylon, pack of 30		PK	1

Black Nylon Wire Ties

These wire ties are perfect for securing wires. You can choose from an assortment of sizes. Ultraviolet resistant for outdoor use.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
WTB05	Black Wire Ties – 5" Nylon, pack of 35	18	PK	1
WTB05C	Black Wire Ties – 5" Nylon, pack of 100	18	PK	1
WTB07	Black Wire Ties – 7" Nylon, pack of 30	50	PK	1
WTB07C	Black Wire Ties – 7" Nylon, pack of 100	50	PK	1
WTB07M	Black Wire Ties – 7" Nylon, pack of 1000	50	PK	1
WTB11	Black Wire Ties – 11" Nylon, pack of 15	50	PK	1
WTB11C	Black Wire Ties – 11" Nylon, pack of 100	50	PK	1
WTB11CR	Black Wire Ties, Releasable – 11" Nylon, pack of 100	50	PK	1
WTB11D	Black Wire Ties – 11" Nylon, pack of 500	50	PK	1
WTB11M	Black Wire Ties – 11" Nylon, pack of 1000	50	PK	1
WTB15	Black Wire Ties – 14" Nylon, pack of 12	50	PK	1
WTB15C	Black Wire Ties – 14" Nylon, pack of 100	50	PK	1
WTBA1	Black Wire Ties – Assorted 4", 7", and 11" Nylon, pack of 2850		PK	1

Wire Tie Mounts

These mounts are use for mounting wires in electrical work.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WTM1	White Wire Tie Mounts – Adhesive Back, pack of 4	PK	1
WTM1C	White Wire Tie Mounts – Adhesive Back, pack of 100	PK	1
WTM2	White Wire Tie Mounts – #8 Screw, pack of 7	PK	1
WTM2C	White Wire Tie Mounts – #8 Screw, pack of 100	PK	1

The Perfect Pad for Every Project

E LITE®
DIVERSITECH

HEF-T-PAD
DIVERSITECH

THE BLACK PAD
DIVERSITECH

ULTRA LITE
DIVERSITECH

CLAD LITE
DIVERSITECH

E Lite®
UltraLite®
CladLite®
Hef-T-Pad™
THE Black Pad®

With DiversiTech's complete lineup of durable equipment pads, you're sure to find the right one for any project. From our lightweight Hef-T-Pads to sturdy concrete CladLites we offer the best selection of materials and sizes so your customers get what they need. Check out the complete pad and product offering at www.diversitech.com

DIVERSITECH®

TOOLS

Allen Wrenches	161
Brushes.....	161-163
Calipers	164
Channellock® Products	164
Clipboards.....	164
Electrical Supplies	165
Fin Tools.....	165-166
Flashlights and Lanterns By Rayovac®	166
Flashlights By Mag-Lite®	167
Gauges	167
Hobby and Cutting Knives	168
HVAC Airflow Instruments	168
Manometers, Pressure.....	168
Measuring Tapes, Staples and Staple Guns	169
Meters, Detectors, Alarms	169-170
Miscellaneous Tools.....	170-171
Monitors.....	171
Nut Setters	171
Refractometers	172
Rehvac Nitrogen Purging Equipment.....	160
Rehvac Refillable Gas Cylinders.....	160
Retrieving Tool/Mini-Lights.....	172
Saws and Saw Blades.....	173
Scales.....	173
Screwdrivers, Driver Sets.....	173-174
Snips, Notchers, Crimpers, Seamers.....	174
Straps, Truck Rope	175
Test Leads	176
Testers	176
Thermometers/Probes.....	177-178
Tube Working Tools	179-180
Welding Torches, Supplies	180



REHVAC NITROGEN PURGING EQUIPMENT

Regulators

Rehvac nitrogen and CO₂ regulators feature a machined brass piston with internal bleed-down safety. This design makes the Rehvac regulator long lasting and reliable.



CT-475M

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CA-252C	Rehvac Adjustable Regulator, 0-250psi	EA	1
CT-475M	Regulator, N/CO ₂ – 0-475 psi	EA	1
GT-750	Rehvac Nitrogen Regulator 0-750psi	EA	1

Hoses

Rehvac hoses are designed specifically for air, nitrogen, or CO₂ service. Featuring a 600psi working pressure and a 2200psi burst pressure, Rehvac hoses are abrasion resistant and long lasting.



CW-30

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CW-30	Rehvac 30" Whip Hose	EA	1

Nitrogen Purge Tool

The Nitrogen Purge Tool is a quick and easy way to purge copper pipes with nitrogen. Then, with a turn of the dial, quickly switch to a very low flow of nitrogen to properly braze the copper. It has a durable aluminum design so you can just throw it into your tool bag when you are done.



DP-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DP-1	Nitrogen Purge Tool	EA	1

Flowmeters

The Rehvac Nitrogen Purge Flow-meter is the perfect tool for purging the line-set before brazing. This flowmeter attaches to the 1/4\"/>



GAU225-PURGE

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GAU225-PURGE	Rehvac Nitrogen Purge Flowmeter	EA	1

Gauges

Rehvac replacement gauges are reliable and easy to read.



GA-06

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
GA-06	Rehvac 600psi Low Pressure Replacement Gauge	EA	1
GA-30	Rehvac 3000psi High Pressure Replacement Gauge	EA	1

REHVAC REFILLABLE GAS CYLINDERS

Nitrogen Cylinders

Rehvac aluminum nitrogen cylinders from DiversiTech are commonly used in the HVAC industry for line cleaning and purging, pressure testing and braze purging. Made in the USA.



N20-SD

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
N20-SD	Rehvac Nitrogen Cylinder 57 cu ft	EA	1

CO₂ Cylinders

Rehvac aluminum CO₂ cylinders from DiversiTech are commonly used in the HVAC industry for condensate line cleaning. Made in the USA.



C10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
C10	Rehvac 10# Aluminum Cylinder	EA	1
C1-2-6	Rehvac 1.2# Cylinder	EA	1
C20	Rehvac Nitrogen Purge Flowmeter	EA	1
C20-D	Rehvac 20# Cylinder with Siphon Tube	EA	1
C2-5	Rehvac Cylinder, 2.5#	EA	1
C2-5S	Rehvac 2.5# Cylinder with Straight Valve	EA	1
C5	Rehvac 5# Aluminum Cylinder	EA	1

ALLEN WRENCHES

Allen Wrenches – Long Arm

Most needed combination of Allen Wrenches packaged in clearly marked vinyl pouches.



AW-96

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AW-712	7 Keys, 12" long arm series: 5/64", 3/32", 1/8", 5/32", 3/16", 7/32", 1/4"	EA	1
AW-96	9 Keys, 6" long arm series: 5/64", 3/32", 1/8", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8"	EA	1

Allen Duracast™ Fold Ups

Unique "double foldout" design. This convenient pocket wrench set opens from both the top and bottom for fast, easy access to each and every bit. Instead of unfolding the top wrenches to get at the wrenches underneath, just turn the FOLD UP over. Specially contoured handle, so you'll never cut your hands or snag clothing.



AWZ-2500

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AWZ-2500	3-1/2" Handle, 9 Bits .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16"	EA	1
AWZ-3000	4-1/4" Handle, 9 Bits 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	EA	1

Allen Wrenches

The finest quality wrenches available anywhere.



AW-8

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AW-8	3" Handle, 8 Bits, Standard Fold-Ups .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32"	EA	1
AW-9	4" Handle, 9 Bits, Standard Fold-Ups 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	EA	1
AWL-5	5-1/4" Handle, 5 Bits, Long Arm Fold-Ups 3/16", 7/32", 1/4", 5/16", 3/8"	EA	1
AWL-9	6-1/4" Handle, 9 Bits, Long Arm Fold-Ups 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	EA	1

Allen Wrenches – Individual Sizes

These Allen Wrenches are sold in individual sizes. These are great for specific projects.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
AW-712-10	Allen Wrench 12" x 5/32"	EA	25
AW-712-8	Allen Wrench 12" x 1/8"	EA	25
AW-96-10	Allen Wrench 6" x 5/32"	EA	25
AW-96-8	Allen Wrench 6" x 1/8"	EA	25

BRUSHES

Chip Brushes

100% pure bristle, wood handle. Poly sleeve over bristles. Inexpensive (use once and throw away). Excellent for applying duct adhesive.




B-500

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-501	Chip Brush – 1"	EA	36
B-502	Chip Brush – 1-1/2"	EA	36
B-503	Chip Brush – 2"	EA	24
B-504	Chip Brush – 2-1/2"	EA	12
B-505	Chip Brush – 3"	EA	12

Welder's Brush

Stainless steel bristles used for cleaning all metals. Great for cleaning aluminum prior to soldering.



B-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-4	Welder's Brush	EA	12

Tin Handle Acid Brushes

Manufactured with electrolyte tin plate and filled with 100% pure stiff horsehair, tied with a steel staple. This combination gives lasting qualities when used with heat and acids or other cleaning agents.



B-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-1	Tin Handle Acid Brush 3/8"	EA	144
B-2	Tin Handle Acid Brush 1/2"	EA	144

Refrigerator Coil Brush

Clean refrigerator coils, fan blades and areas under and behind appliances. 27-1/2" in length with 11-3/4" brush length. Bristles are 3/4" on the end tapering to 1-1/2" toward the handle.



B-27

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-27	Refrigerator Coil Brush	EA	1

BRUSHES cont'd

Parts Cleaning Brush

The heavy duty black polypropylene bristles are secured in a strong plastic handle.



542-25015

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
542-25015	Parts Cleaning Brush	EA	12

2-in-1 Copper Tube Cleaning Brush

Easy to hold combination tool that really works. One end cleans the fitting. The other cleans the tube.



B-998

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-996	2-in-1 Copper Tube Cleaning Brush – 1/2" ID (5/8" OD)	EA	1
B-998	2-in-1 Copper Tube Cleaning Brush – 3/4" ID (7/8" OD)	EA	1

Copper Tube Fitting Brushes

Highest quality brushes to clean fittings faster, easier and more safely. Made with strong, resilient, rustproof stainless steel bristles secured in a 4-ply wire with easy-to-grip plastic handle. Economy models feature same quality stainless steel, but secured in 2-ply wire.



B-927

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-124	Copper Tube Fitting Brush – Economy 1/4" O.D., 9/32" Brush Dia.	EA	6
B-125	Copper Tube Fitting Brush – Economy 3/8" O.D., 13/32" Brush Dia.	EA	6
B-126	Copper Tube Fitting Brush – Economy 1/2" O.D., 17/32" Brush Dia.	EA	6
B-127	Copper Tube Fitting Brush – Economy 5/8" O.D., 11/16" Brush Dia.	EA	6
B-128	Copper Tube Fitting Brush – Economy 3/4" O.D., 13/16" Brush Dia.	EA	6
B-129	Copper Tube Fitting Brush – Economy 7/8" O.D., 15/16" Brush Dia.	EA	6
B-130	Copper Tube Fitting Brush – Economy 1" O.D., 1-1/8" Brush Dia.	EA	6
B-131	Copper Tube Fitting Brush – Economy 1-1/8" O.D., 1-1/4" Brush Dia.	EA	6
B-132	Copper Tube Fitting Brush – Economy 1-3/8" O.D., 1-1/2" Brush Dia.	EA	6
B-924	Copper Tube Fitting Brush – 1/4" O.D., 9/32" Brush Dia.	EA	1
B-925	Copper Tube Fitting Brush – 3/8" O.D., 13/32" Brush Dia.	EA	1
B-926	Copper Tube Fitting Brush – 1/2" O.D., 17/32" Brush Dia.	EA	1
B-927	Copper Tube Fitting Brush – 5/8" O.D., 11/16" Brush Dia.	EA	1
B-928	Copper Tube Fitting Brush – 3/4" O.D., 13/16" Brush Dia.	EA	1
B-929	Copper Tube Fitting Brush – 7/8" O.D., 15/16" Brush Dia.	EA	1
B-930	Copper Tube Fitting Brush – 1" O.D., 1-1/8" Brush Dia.	EA	1
B-931	Copper Tube Fitting Brush – 1-1/8" O.D., 1-1/4" Brush Dia.	EA	1
B-932	Copper Tube Fitting Brush – 1-3/8" O.D., 1-1/2" Brush Dia.	EA	1
B-934	Copper Tube Fitting Brush – 1-5/8" O.D., 1-3/4" Brush Dia.	EA	1
B-935	Copper Tube Fitting Brush – 2-1/8" O.D., 2-1/4" Brush Dia.	EA	1

Duct Cleaning Brush

These brushes are made of black fiber bristles twisted in wire. They are 1 1/8in. diameter by 7in. brush x 48in. overall length. These are idea for cleaning hard to reach areas in duct work.



542-76220

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
542-76220	Duct Cleaning Brush	EA	1

Outside Tube Cleaning Brushes

A tough molded plastic holder allows for a comfortable sure grip. The brush has high carbon steel bristles and comes 6 to a box.



542-00966

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
542-00968	Outside Tube Cleaning Brush – 3/4" ID (7/8" OD)	EA	6

Carbon Steel Curved Handle Scratch Brush

Carbon Steel Curved Handle Scratch Brushes are used for general purpose cleaning.



B-10

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-10	Carbon Steel Curved Handle Scratch Brush	EA	1

Condenser/Heat Exchanger Brushes

Ideal for cleaning mineral deposits from inside metal tubes. Especially recommended for use with power tools, although handle for manual use is available.



B-602

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-602	Condenser/Heat Exchanger Brush – 1/4" Brass 8-32 Female	EA	1
B-604	Condenser/Heat Exchanger Brush – 3/8" Brass 12-24 Female	EA	1
B-607	Condenser/Heat Exchanger Brush – 7/16" Brass 12-24 Female	EA	1
B-610	Condenser/Heat Exchanger Brush – 1/2" Brass 12-24 Female	EA	1
B-613	Condenser/Heat Exchanger Brush – 9/16" Brass 12-24 Female	EA	1
B-616	Condenser/Heat Exchanger Brush – 5/8" Brass 12-24 Female	EA	1
B-619	Condenser/Heat Exchanger Brush – 11/16" Brass 12-24 Female	EA	1
B-622	Condenser/Heat Exchanger Brush – 3/4" Brass 12-24 Female	EA	1
B-628	Condenser/Heat Exchanger Brush – 7/8" Brass 12-24 Female	EA	1
B-633	Condenser/Heat Exchanger Brush – 1" Brass 12-24 Female	EA	1
B-702	Condenser/Heat Exchanger Brush – 1/4" Nylon 8-32 Female	EA	1
B-704	Condenser/Heat Exchanger Brush – 3/8" Nylon 12-24 Female	EA	1
B-707	Condenser/Heat Exchanger Brush – 7/16" Nylon 12-24 Female	EA	1
B-710	Condenser/Heat Exchanger Brush – 1/2" Nylon 12-24 Female	EA	1
B-713	Condenser/Heat Exchanger Brush – 9/16" Nylon 12-24 Female	EA	1
B-716	Condenser/Heat Exchanger Brush – 5/8" Nylon 12-24 Female	EA	1
B-719	Condenser/Heat Exchanger Brush – 11/16" Nylon 12-24 Female	EA	1
B-722	Condenser/Heat Exchanger Brush – 3/4" Nylon 12-24 Female	EA	1
B-728	Condenser/Heat Exchanger Brush – 7/8" Nylon 12-24 Female	EA	1
B-733	Condenser/Heat Exchanger Brush – 1" Nylon 12-24 Female	EA	1
B-802	Condenser/Heat Exchanger Brush – 1/4" Stainless 8-32 Female	EA	1
B-807	Condenser/Heat Exchanger Brush – 7/16" Stainless 12-24 Female	EA	1
B-810	Condenser/Heat Exchanger Brush – 1/2" Stainless 12-24 Female	EA	1
B-813	Condenser/Heat Exchanger Brush – 9/16" Stainless 12-24 Female	EA	1
B-816	Condenser/Heat Exchanger Brush – 5/8" Stainless 12-24 Female	EA	1
B-819	Condenser/Heat Exchanger Brush – 11/16" Stainless 12-24 Female	EA	1

Extension Rods for Condenser Tube Brushes

Aluminum rods can be threaded into each other to make an endless length with these extension rods.



BE-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BE-24	24" Rods w/male thread one end, female other 12-24 thread size	EA	3
BE-36	36" Rods w/male thread one end, female other 12-24 thread size	EA	3
BE-48	48" Rods for 1/4" brushes only 8-32 thread size	EA	3
BH-1	Handgrip – 4" long threads into rods	EA	1

Fin Whisk

A plastic handled whisk for cleaning condenser and evaporator fins.



B-26

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-26	Fin Whisk Brush	EA	12

Condenser/Heat Exchanger Brushes for Commercial Tube Cleaning

For all commercial power tube cleaning machines. 1/4" and 3/8" dia. brushes have 8-32 female threads. 7/16"–1" brushes have 1/4–28 male threads. Use 7/16"–1" brushes for both CW and CCW rotation using a 1/4–28 NF jam locknut.



B-202

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-202	Condenser/Heat Exchanger Brush – 1/4" Brass 8-32 Female	EA	1
B-204	Condenser/Heat Exchanger Brush – 3/8" Brass 8-32 Female	EA	1
B-207	Condenser/Heat Exchanger Brush – 7/16" Brass 1/4-28 Male	EA	1
B-210	Condenser/Heat Exchanger Brush – 1/2" Brass 1/4-28 Male	EA	1
B-213	Condenser/Heat Exchanger Brush – 9/16" Brass 1/4-28 Male	EA	1
B-216	Condenser/Heat Exchanger Brush – 5/8" Brass 1/4-28 Male	EA	1
B-219	Condenser/Heat Exchanger Brush – 11/16" Brass 1/4-28 Male	EA	1
B-222	Condenser/Heat Exchanger Brush – 3/4" Brass 1/4-28 Male	EA	1
B-228	Condenser/Heat Exchanger Brush – 7/8" Brass 1/4-28 Male	EA	1
B-233	Condenser/Heat Exchanger Brush – 1" Brass 1/4-28 Male	EA	1
B-302	Condenser/Heat Exchanger Brush – 1/4" Nylon 8-32 Female	EA	1
B-304	Condenser/Heat Exchanger Brush – 3/8" Nylon 8-32 Female	EA	1
B-307	Condenser/Heat Exchanger Brush – 7/16" Nylon 1/4-28 Male	EA	1
B-310	Condenser/Heat Exchanger Brush – 1/2" Nylon 1/4-28 Male	EA	1
B-313	Condenser/Heat Exchanger Brush – 9/16" Nylon 1/4-28 Male	EA	1
B-316	Condenser/Heat Exchanger Brush – 5/8" Nylon 1/4-28 Male	EA	1
B-319	Condenser/Heat Exchanger Brush – 11/16" Nylon 1/4-28 Male	EA	1
B-322	Condenser/Heat Exchanger Brush – 3/4" Nylon 1/4-28 Male	EA	1
B-328	Condenser/Heat Exchanger Brush – 7/8" Nylon 1/4-28 Male	EA	1
B-333	Condenser/Heat Exchanger Brush – 1" Nylon 1/4-28 Male	EA	1
B-407	Condenser/Heat Exchanger Brush – 7/16" Stainless 1/4-28 Male	EA	1
B-422	Condenser/Heat Exchanger Brush – 3/4" Stainless 1/4-28 Male	EA	1
B-428	Condenser/Heat Exchanger Brush – 7/8" Stainless 1/4-28 Male	EA	1
B-433	Condenser/Heat Exchanger Brush – 1" Stainless 1/4-28 Male	EA	1

CALIPERS

Digital Fractional Calipers

Our calipers are made of a heavy duty stainless steel construction. There is a convenient auto on/ off feature and a three mode digital display: decimal inches, fractions, and metrics. The accuracy on this product is +/- 0.001in. to +/- 0.02mm. The product has a resolution of 0.0005in., 0.01mm, 1/64in. and includes a battery.



6-T147

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T147	Range: 0 - 6" (0 - 153mm)	EA	1

CHANNELLOCK® PRODUCTS

Tongue and Groove Pliers

These patented design pliers have permalock fasteners and reinforcing edge. The grips are also dipped in plastic for a more comfortable hold.



545-430

545-440

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
545-420	9-1/2" Tongue and Groove Pliers	EA	1
545-422	9-1/2" Curved Jaw Tongue and Groove Pliers	EA	1
545-424	4-1/2" Tongue and Groove Pliers	EA	1
545-426	6-1/2" Tongue and Groove Pliers	EA	1
545-430	10" Tongue and Groove Pliers	EA	1
545-440	12" Tongue and Groove Pliers	EA	1
545-442	12" Curved Jaw Tongue and Groove Pliers	EA	1
545-460	16" Tongue and Groove Pliers	EA	1

CLIPBOARDS

Clipboards and Form Holders

Rugged aluminum construction to protect your paperwork and forms. Smooth aluminum surfaces provide excellent writing support.



30306

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
30306	SNAPAK Clipboard on Box w/Hinged Back - 8-1/2" x 12"	EA	1
30309	REDI-RITE Clipboard on Box - 8-1/2" x 12"	EA	1
30310	CRUISER MATE 2 Compartment Clipboard - 8-1/2" x 12"	EA	1

ELECTRICAL SUPPLIES

Outdoor Extension Cord

Heavy duty, round, vinyl extension cord designed for industrial use. Orange vinyl jacket protects against oil, grease, ozone, and gives added flexibility at below freezing temperatures. Vinyl plugs and connectors are molded on and won't break or pull off cord.



7-ECC50735

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-ECC12100	100' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	3
7-ECC1225	25' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	10
7-ECC1250	50' Extension Cord, 12/3 SJTW-A, 15 AMP	EA	6
7-ECC16100	100' 13 Amp Extension Cord SJTW-A 16/3	EA	6
7-ECC1625	25' 15 Amp Extension Cord SJTW-A 16/3	EA	24
7-ECC1650	50' 15 Amp Extension Cord SJTW-A 16/3	EA	12
7-ECC50725	25' 15 AMP Extension Cord SJTW-A 14/3	EA	14
7-ECC50730	50' 15 AMP Extension Cord SJTW-A 14/3	EA	10
7-ECC50735	100' 13 AMP Extension Cord SJTW-A 14/3	EA	5

Type: SJTW-A U.L. Listed, meets OSHA Requirements.

Power Blocks

Professional design gives contractors and industrial personnel maximum flexibility in arranging portable power needs at the job site. Vinyl connectors are solid molded for high resistance to breakage and abuse.




7-AD010000

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-AD010000	Triple tap power block adapter converts single 15 AMP 125V U-ground outlet to 3 15A, 125V U-ground outlets	EA	10

Metal Guard Trouble Lights

Designed for rugged use by contractors and industrial. Tough plastic handles are heat and shock resistant, with switch and 15A, 125V grounding side outlet.



7-TLC10625

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-TLC10625	25' Metal Guard Trouble Light	EA	1
7-TLC10630	50' Metal Guard Trouble Light	EA	1

AWG: 16/3 TYPE: SJTW-A U.L. Listed, meets OSHA Requirements.

Rough Service Light Bulbs

Designed to withstand unusual shock and abuse on drop cords, mechanic trouble lights, extension cords and anywhere else severe shocks may be encountered. 4 bulbs per box for 100 watt bulbs. 4 bulbs per box for 75 watt bulbs. 120/case.




7-100W

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-75W	75 Watt Rough Service Bulb – Bulk Packed	EA	120
7-100W	100 Watt Rough Service Bulb – Bulk Packed	EA	120

FIN TOOLS

Multi-Head Fin-Tool

Conveniently straightens and cleans condenser and evaporator fins. Each nylon head slides into the master handle and tightens in place. Heads are designed to fit units with fin spacing of 4–24 fins per inch. Each head is engraved with its own size and is color coded for fast identification. Heads are angled so that when inserted in the handle, the hand is a safe distance from the sharp fins. Heads may also be reversed in the handle so that combing with an upward stroke (recommended method) may be done easily with proper leverage. The master handle rests comfortably in a man size grip, is rigid and long lasting.



T-100

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T-1	Handle Only – Black	EA	1
T-8	Head 8 FPI – Orange, pack of 3	PK	1
T-9	Head 9 FPI – Yellow, pack of 3	PK	1
T-10	Head 10 FPI – Natural, pack of 3	PK	1
T-100	Kit – 1 Handle and 6 Heads: 8, 9, 10, 11, 12, 14	EA	12
T-101	Kit – 1 Handle and 6 Heads: 13, 15, 16, 17, 18, 20	EA	12
T-11	Head 11 FPI – Blue, pack of 3	PK	1
T-12	Head 12 FPI – Green, pack of 3	PK	1
T-14	Head 14 FPI – Lt. Green, pack of 3	PK	1
T-13	Head 13 FPI – Pink, pack of 3	PK	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T-15	Head 15 FPI – Aqua, pack of 3	PK	1
T-16	Head 16 FPI – Brown, pack of 3	PK	1
T-17	Head 17 FPI – Blue, pack of 3	PK	1
T-18	Head 18 FPI – Red, pack of 3	PK	1
T-20	Head 20 FPI – Purple, pack of 3	PK	1
T-21	Head 21 & 22 FPI – Rose (for Carrier unit), pack of 3	PK	1

U.S. Patent No. 4,018,076.

FIN TOOLS cont'd

Fin-Tool

Long lasting metal fin straightener. Straightens and cleans condenser and evaporator fins. One tool for all units. The heavy duty spring wire bristles automatically adjust to ALL fin spacings. An exclusive tension adjustment band is featured to allow maximum rigidity and ease of operation. Straightens most severely damaged fins.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T-200	Fin-Tool	EA	1
T-300	Fin-Tool with heavy duty bicycle handle	EA	12

SuperComb

Easier to grip, easier to use tool for straightening condenser and evaporator fins. Straightens 50% more fins in one stroke. Keeps hands a safe distance from fins. Easy to grip, strong, durable, heavy duty nylon. Color coded for easy identification. Sold individually or 6 per set. Sales display available.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T-400	Set of 6 – 1 Ea.: T-408, T-409, T-411, T-410, T-417, T-418	EA	1
T-408	8 and 10 FPI – Orange	EA	1
T-409	9 and 15 FPI – Yellow	EA	1
T-411	11 and 13 FPI – Blue	EA	1
T-412	12 and 14 FPI – Green	EA	1
T-417	16 and 17 FPI – Lime	EA	1
T-418	18 and 20 FPI – Red	EA	1

FLASHLIGHTS AND LANTERNS BY RAYOVAC®

Rayovac is the Industrial Product Leader!

Rayovac is the leader in the industrial battery market and has been for years, with an estimated 50% share of the traditional industrial distribution channel. Rayovac introduced the top-selling industrial flashlight to the market, and set the quality standard by which all other industrial flashlights are measured today. Whether your customer is searching for a toolbox-tough flashlight or high-performance batteries, Rayovac offers a broad range of products to meet your needs.

Rayovac Industrial Flashlights and Lanterns

Rayovac Industrial Flashlights are made of toolbox tough polypropylene construction which makes them scratch resistant and they have an unbreakable lens. There is a full lifetime warranty on this USA made product.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-301K	Krypton Beam Lantern with 918 Battery	EA	1
7-16V-B2	6 Volt Industrial Lantern with Battery	EA	2
7-IN2	2 Cell D Size	EA	6
7-IN2K	2 Cell D Size with Krypton Bulb	EA	6

Rayovac Industrial Swivel Lights

The 90 Degree pivoting head shines light exactly where you're working with this light. The stand up base, built in hanging ring and non roll design make it easy to position. The rubber handle and end caps are designed for durability and comfort. The beam is a 200% brighter Krypton beam.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-ILJ2AA-B	2 Cell AA Size Swivel Lite with Batteries	EA	6
7-ISL2D-B	2 Cell D Size Swivel Lite with Batteries	EA	6

Rayovac LED Flashlights

This flashlight is water resistant with a machined aluminum with knurled grip and a bronze finish. There is a full lifetime warranty on this USA made product. A holster is included with this item.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-SE4W3C	Sportsman Extra 3C Lumen	EA	4
7-SPHW3AAA-BX	Sportsman 3AAA 20 Lumen	EA	6

Rayovac Roughneck Flashlights

Roughneck flashlights have a superior dependability and toughness. They feature a spot to flood focus with a Krypton bulb and are chemical and solvent resistant.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-R2D	2 Cell D Size Roughneck	EA	6
7-R2AA-B	2 Cell AA Size Roughneck w/Batteries	EA	6
7-R3D	3 Cell D Size Roughneck	EA	6

FLASHLIGHTS BY MAG-LITE®

Each Mag-Lite Flashlight offers these features: 1. Exclusive cam-driven beam that changes from spot to flood with a turn of the head. 2. Patented, self-cleaning switch. 3. High quality White Star Krypton bulb (second bulb included in the tail cap) 4. High grade rubber O-rings at each opening to insure water resistance and enhance ability to withstand shock. 5. Anodized finish both inside and out to offer optimum corrosion resistance. 6. Limited lifetime warranty. 7. Manufactured in the USA.

Mag-Lite® C and D Cell Flashlights

Police, security, emergency, medical and fire professionals have come to rely on Mag-Lite C and D Cell flashlights more than any other brand. They know serious duty demands serious equipment. The finest flashlight in the world!



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-S2C016	2 Cell C Mag-Lite Flashlight – Black	EA	1
7-S2D016	2 Cell D Mag-Lite Flashlight – Black	EA	1
7-S3D016	3 Cell D Mag-Lite Flashlight – Black	EA	1
7-S4C016	4 Cell C Mag-Lite Flashlight – Black	EA	1
7-S4D016	4 Cell D Mag-Lite Flashlight – Black	EA	1

Mini Mag-Lite®


Until the Mini Mag-Lite was introduced, no one had ever dreamed a flashlight could be so small, yet so powerful. Named as one of the "products America makes best" by Fortune and Money magazines.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-AM2A056	Mini Mag-Lite AA Holster – Black	EA	12
7-M2A016	Mini Mag-Lite AA – Black	EA	1
7-M2A026	Mini Mag-Lite AA – Camouflage	EA	1
7-M2A036	Mini Mag-Lite AA – Red	EA	1
7-M3A016	Mini Mag-Lite AAA – Black	EA	1

Mag-Lite® Replacement Bulbs

This selection of bulbs includes replacements for the Mini Mag Lite as well as the Magna Lite products.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-LK3A001	Solitaire Replacement Bulb – 2 per Card	EA	12
7-LM2A001	Mini Mag-Lite AA Replacement Bulb – 2 per Card	EA	12
7-LWSA301	3 Cell C or D Replacement Bulb – 2 per Card	EA	12
7-LWSA401	4 Cell C or D Replacement Bulb – 2 per Card	EA	12

Magna-Lite

Unbreakable pocket flashlite/magnifier. Ideal for checking small serial numbers and names on compressors or where poor light makes reading difficult. Powerful, optical-quality magnifying lens. Lightweight. Replacable penlight batteries.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ML-100	Magna-Lite – 1-1/2 oz.	EA	12

GAUGES

Manifold Gauge

DiversiTech's MG-1 Manifold Gauge provides the technician with a precision diagnostic and monitoring analog gauge set complete with hoses.

The Manifold Gauge and Hose Set includes:

- 2 valve brass manifold
- 5' long high pressure hose set
- For use with the following refrigerants:
 - R-410A
 - R-22
 - R-407C
- Detailed gauge readings in PSI °F



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MG-1	Manifold Gauge and Hose Set	EA	1
MG-RGB	Replacement Gauge – blue	EA	1
MG-RGR	Replacement Gauge – red	EA	1
MG-ORING	Replacement O-ring	EA	1

Sheet Metal Gauge

The Sheet Metal Gauge is used for gaging uncoated sheet metal, plate iron, and steel. The Gauge numbers are US Standard 0 to 36. Satin finished, heavy gauge hardened/tempered steel with decimal equivalents of each size stamped on the reverse side. The gauge is 3 1/4in. diameter and is 3/32in. thick.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T21	Steel Sheet Metal Gauge – 3-1/4" diameter, 3/32" thick	EA	1

HOBBY AND CUTTING KNIVES

The Quad™ 14-Piece Saw/Driver Set

A 4 in 1 cutting and driving system set. Included in the set are a Jab Saw with straight handle and special Sheetrock reciprocal blade, a Keyhole Saw in the pistol grip handle position, a Power Drive in the pistol grip position, and the Speed Driver, screw or nut driver with a straight handle. The Keyless Quick Change locking chuck accepts both Quick change bits and industry standard reciprocating saw blades. The 14 piece set includes 3 Reciprocating saw blades, drywall, Metal/PVC, wood, ¼in. magnetic speed lock bit holder, 7 of the most popular insert bits, a ¼in. hex to square drive insert bit adaptor for using ¼in. sockets; (bits not included); 2 position quick change locking handle and a convenient holster with belt clip. The swivel locking chuck holds all reciprocating blades and speed shank power bits. A comfortable handle easily locks in the straight or pistol grip position.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T86014	14-Piece Saw/Driver Set	EA	1

6-T86014



HVAC AIRFLOW INSTRUMENTS

Digital One-Piece Air Flow Meter with CFM Display

This Meter displays CFM, FPM, MPH, KPH, MPS, temp and knots. This easy, single hand airflow measure has a handy recessed service grip with single and multi point averages. There is a Min/ Max, data, hold F/C switch and an RS 232 output. The range is 14 to 122 F (10 to 50C). The air flow range is 80 to 5900 FPM (0.4 to 30 m/s). The accuracy is +/- 3 % full scale, +/-1 F (+/- 1C). The display is 1.25in. x 1.625in. with dimensions of 7in. x 2.25in. x 1.75in.. The meter includes 1 9V batter in a molded hard case.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DCFM8906	Digital One-Piece Air Flow Meter with CFM Display	EA	1

6-DCFM8906




MANOMETERS, PRESSURE

Hydrogauge Manometer

Economical Pressure measurements.

- Replaces ordinary U-tube manometers
- Measures gas pressure easily and efficiently
- Direct reading, no plus or minus readings to add together as in old fashioned U-tubes
- Fills like a glass of water, no more air bubbles
- Strong magnet for mounting
- Heavy-duty construction
- Made of industrial grade, flexible PVC plastic
- Lightweight; Easy to use
- 6-HG15 water column height: 15"
- Plastic: 30" to 36" of industrial grade flexible plastic
- Hose fitting: All brass

Includes: Mounting magnet.



6-HG15

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HG15	Hydrogauge Manometer	EA	1

Gas Pressure Test Kit

Rugged, Heavy Duty Field Use.

- Measure Natural gas (methane) or LP gas pressure across appliance manifolds.
- Test gas stoves, furnaces, dryers and other gas appliances. Can also be used for other non-corrosive gases.
- Large 2" sensitive diaphragm gauge is calibrated in inches of water column, also shows ounces per square inch
- Magnified lens
- Easier to use than a manometer
- Range: 0 to 35 inches of water column (in. H₂O) 0 to 20 ounces per square inch (oz./in²)

Includes: 2" sensitive diaphragm gauge; 3' of rubber tubing; brass fitting for quick connection to the appliance manifold 3/8" NPT; molded hard case.

6-GPK035




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-GPK035	Gas Pressure Test Kit	EA	1

MEASURING TAPES, STAPLES AND STAPLE GUNS

Power Measuring Tapes

Rust resistant yellow lacquered blade with easy to read inch/foot markings (English). Neon case has belt clips and finger-tip blade lock.




540-256

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-256	Power Tape – Neon Green 1" x 25'	EA	6

T-50 Series Staples and Staple Guns

The #1 selling staple gun in the world! Used extensively by building contractors, home do-it-yourselfers and specialty trade applications for tacking insulation, ceiling tile, window screening, cornerite, and 1001 other jobs ranging from light to heavy duty work. The T-50 Outward Clinch Staple Gun is ideal for fiberglass ductwork.



540-T50MOC



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-506	3/8" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-508	1/2" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-509	9/16" Leg Staples for T50 Staple Guns (1,250)	EA	4
540-T50M	T50M Heavy Duty Staple Gun Tacker	EA	1
540-T50MOC	T50MOC Outward Clinch Staple Gun	EA	1

METERS, DETECTORS, ALARMS

HVACR Refrigerant Leak Detector

Industrial and Automotive uses.
 • Detects ALL halogenated refrigerants
 • Sensitivity adjustment dial
 • High sensitivity
 • Equipped with quality sensor
 • Flexibility up to 3 gr/yr
 • Microcomputer processor control
 Includes: 2 "C" batteries.



6-RLD202

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-RLD202	HVACR Refrigerant Leak Detector	EA	1

High Performance Refrigerant Leak Detector with Pump

The Leak Detector is designed for HVAC, Industrial, Automotive, and small leaks. There is microprocessor control with advanced digital signal processing. It includes multi color display, high-median-low leak sensitivity selector, and semiconductor gas sensor. The detector detects of R-134a, R-404A, R-410A, R-407C, R22, and Freon gas. There is reference leak source included as well as 4 AA Alkaline batteries, leak check bottle, and molded hard case.



6-RLD382P

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-RLD382P	High Performance Refrigerant Leak Detector w/Pump	EA	1

Mini AC AMP Clamp Meter

HVAC, Industrial uses.
 • Data hold
 • Auto ranging
 • Easy-to-use
 • Continuity beeper
 • Low battery indicator
 • Auto power off
 • Jumbo LCD display
 • AC voltage: to 600V
 • AC current: to 600A
 • Resistance: to 200V
 • Sampling rate: 2 times/second
 • Jaw opening: 1"
 • Dimensions: 7.4" x 2" x 1.3"
 • Weight: 7.4 oz.
 Includes: 2 "AAA" batteries; all weather test leads; soft carrying case.




6-DAMP221

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DAMP221	Mini AC AMP Clamp Meter	EA	1

Digital UL Listed Multimeter

Economical Electrical Readings.
 • 7 Functions – 20 Ranges
 • High Impact Thermoplastic Case
 • Simple Operation
 • Small Pocket Size
 • Safety Recessed Test Lead Connections
 • Ranges and Accuracy
 • AC Voltage: 0-200/600 Vac, $\pm 2.5\%$
 • DC Voltage: 0-200mV/2/20/200/600 Vdc, $\pm 2\%$
 • DC Current: 0-2000uA/20m/200mA/10Adc, $\pm 1\%$
 • Resistance: 0-200/2k/20k/200k/2M/20M Ω , $\pm 1.5\%$
 Includes: Battery Test; Diode Test; Continuity Buzzer.



6-DMM20UL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DMM20UL	Digital UL Listed Multimeter	EA	1

METERS, DETECTORS, ALARMS cont'd

Digital Multimeter with Bright Screen Display

Autoranging, Easy-to-Use, Easy-to-See.

- 10 Functions – 37 Ranges
- Manual and Autoranging
- High Impact Thermoplastic Case
- Simple Operation
- Safety Recessed Test Lead Connections
- Overload Protection on all Ranges
- Audible Continuity
- 10A AC/DC Range
- Data Hold
- Auto Power Off
- Backlit LCD Display
- Ranges and Accuracy

AC Voltage: 0-200mV/2/20/200/600 Vac, $\pm 1\%$
 DC Voltage: 0-200mV/2/20/200/600 Vdc, $\pm 0.5\%$
 AC Current: 0-2mA/20m/200mA/10Aac, $\pm 1.5\%$
 DC Current: 0-2mA/20m/200mA/10Adc, $\pm 1.2\%$
 Resistance: 0-200/2k/20k/200k/2M/20M Ω , $\pm 1\%$
 Capacitance: 0-20n/200nF/2u/20u/100uF, $\pm 3\%$
 Frequency: 1-20/200/2k/20k/200k/2MHz, $\pm 0.2\%$
 Duty Cycle: 0.1 to 99.9%, $\pm 1\%$
 Includes: Test leads; 1 "9V" battery.

6-DMM45



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DMM45	Digital Multimeter with Bright Screen Display	EA	1

MISCELLANEOUS TOOLS

Compressor TOTE

Makes light work of a heavy job. Powder coated, strong steel construction. Recommended for use with all compressors up to 5 tons. Compatible with high efficiency compressors. Pick up a compressor from its box. Carry a compressor up a ladder. Now with black protective finish.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACT-6	Compressor Tote	EA	6

Mechanical Screw Starter

A simple, easy way to end fumbling with hard to position screws. Just insert the screw on the prongs of the screw starter, and a simple twist will lock the screw ready for trouble free starting. Tool automatically releases and resets. Use with ferrous or non-ferrous screws. Nylon handle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
S-3	One End Slotted, Phillips on Other, 9-1/4"	EA	1

Expando Adjustable Condenser Tube Cleaner

Removes mineral scale and sludge from inside water-cooled condenser tubes fast! Saves time-consuming brushing or flushing. Attaches to a threaded rod which fits into an Expando handle or your electric drill. With a reaming action, the stainless steel blades scrape inside the tube, providing an unrestricted flow. Virtually clogproof, it expands or reduces in diameter to fit scale deposits—not just the tube. Use EC-810 couplings for connecting additional rods.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
E-10	Condenser Tube Cleaner – 5/8" to 3/4" I.D. Tubes	EA	1
E-5	Condenser Tube Cleaner – 5/16" to 3/8" I.D. Tubes	EA	1
E-6	Condenser Tube Cleaner – 3/8" to 1/2" I.D. Tubes	EA	1
E-8	Condenser Tube Cleaner – 1/2" to 5/8" I.D. Tubes	EA	1
EB-10	Blades for E-10	EA	1
EB-6	Blades for E-5 and E-6	EA	1
EB-8	Blades for E-8	EA	1
EC-56	Couplings for E-5 and E-6	EA	3
EC-810	Couplings for E-8 and E-10	EA	3
EH-1	Handle	EA	1

Telescopic Inspection Mirror

Fast, accurate visual inspection of hidden areas with an almost limitless number of positions. Double ball joint links swivel mirrors for viewing to 360°. Precision engineered links are made from tempered spring steel to withstand the stresses of constant repositioning. Moves freely, holds desired position.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
M-1	Mirror – 1-1/4" Circular – extends 6-1/4" to 18-1/4"	EA	1
M-1R	Replacement Head for M-1	EA	1
M-2	Mirror – 2-1/4" Circular – extends 10" to 14"	EA	1
M-2R	Replacement Head for M-2	EA	1
M-3	Mirror – 2-1/8" x 3-1/2" Rectangular – extends 11-1/4" to 15-1/4"	EA	1
M-3G	Refill Mirrors Only 2-1/8" x 3-1/2"	EA	12
M-3R	Replacement Head for M-3	EA	1
M-4	Mirror – 7/8" Circular – extends 6-1/2"	EA	1
M-4R	Replacement Head for M-4	EA	1
M-5	Mirror – 1" x 2" Oval – extends 8-1/2"	EA	1
M-5G	Refill Mirrors Only Oval 1" x 2"	EA	12
M-5R	Replacement Head for M-5	EA	1

MISCELLANEOUS TOOLS cont'd

4-Piece Hook and Pick Set

For separating wires, removing small fuses, "O" rings, retrieving washers and loose parts too small to pick up with your fingers. Bright-dipped, anodized hex-shaped aluminum handles with powerful magnet on end. Handy screw-in hook, pick, point and scribe. High carbon polished needle steel. All in a compact zip-lock vinyl pouch that fits in your shirt pocket! Set includes four screw-in tips plus handle.



MHP-4

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MHP-4	4-Piece Hook and Pick Set	EA	1

MONITORS

007 Control Checker

A lifetime tool for monitoring and checking safety controls and operating controls. One unit for all voltages 24-460 VAC or DC without switching dials or meters. Compact, 4 oz, reliable. Saves troubleshooting. For normally closed controls, 007 connects in parallel with safety control. When the safety control opens in response to a problem in the system, 007 red LED turns on and remains on until reset manually. With intermittent problem, the LED remains on indicating the control is open. For operating controls, 007 verifies the status of all types indicating if there is power to the holding coil, the NC contact is open or closed, the thermostat contacts are open or closed, there is power to the contactor or starting holding coil, the overloads are open or closed, or there is a bad connection either on control or power side. NOTE: May use with lockout relays. Features battery check and reset switch. Includes 9-volt battery. 007 may be used over and over.



TC-007

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TC-007	007 Control Checker	EA	1

U.S. Pat. No. 4,092,625.

Tattle-Tale Control Monitor

Identifies open controls in seconds. A single use monitoring device for determining which safety control has opened in response to a malfunction. Saves wasted hours tracing a safety control shutdown, even if intermittent. A quick, inexpensive way to visually spot where the problem is. Simply install in parallel with each safety control. When a control opens, the red indicator flag pops up. You will know immediately which area of the system is experiencing problems. Disposable, safe, simple to use, and pocket sized. Monitors safety controls, fuses, overload relays, motor protectors, freeze controls, limit controls, safety switches, fusible links, or steam control. CAUTION: Not to be used with lockout relays, use TC-007.



TT-24

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TT-120	Tattle-Tale Control Monitor – 120 Volt AC or DC, pack of 3	PK	1
TT-24	Tattle-Tale Control Monitor – 24 Volt AC or DC, pack of 3	PK	1
TT-240	Tattle-Tale Control Monitor – 240 Volt AC or DC, pack of 3	PK	1

Tolerance on all voltages shown is $\pm 20\%$. U.S. Pat. No. 4,250,480.

NUT SETTERS

Nut Setter – Power

The Magnetic hex driver nut setter can be used with any $\frac{1}{4}$ in. power bit and are individually packed.



5-MSH1/4MC

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-MSH1/4MC	Hex Drive – $\frac{1}{4}$ ", 1-3/4" long, $\frac{1}{4}$ " nut	EA	30
5-MSH5/16MC	Hex Drive – $\frac{1}{4}$ ", 1-3/4" long, $\frac{5}{16}$ " nut	EA	30

Magnetic Nut Setters – Bulk

Magnet hex driver setter to be used with any $\frac{1}{4}$ in. power bit and are package in bulk.



540-500

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-400	Magnetic Nut Setters – $\frac{1}{4}$ ", pack of 30	EA	1
540-500	Magnetic Nut Setters – $\frac{5}{16}$ ", pack of 30	EA	1

REFRACTOMETERS

The Refractometer can measure the freezing point of coolants, glycol and the Charge Condition of Batteries



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-REF401	Refractometer	EA	1

RETRIEVING TOOL/MINI-LIGHTS

Telescoping Mini-Light and Magnetic Pickup

This pickup tool is ideal for retrieving steel and iron parts from hard to reach and see work areas. The magnet is fitted in a 5-1/2in. (140mm) long ergonomically designed handle. The light bulb on this product has a life of 100,000 hours of continuous use. The Mini-Light is fastened to a chrome plated brass wand with a double ball joint. The pickup comes with 4 Alkaline LR41 batteries which have a life of 48 continuous hours. This is a powerful permanent magnetic pick-up tool.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T582	Telescoping Mini-Light and Magnetic Pickup	EA	1

Reach-It



Our Reach-It is made of durable chrome plated brass and retracts to 5in. long. A match can quickly be inserted with the Reach-It.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
R-1	Reach-It – extends to 26-3/4"	EA	12

Mechanical Pickup

Strong four prong steel jaws help retrieve small items from hard to reach places. The flexible shaft helps to avoid obstacles. The smooth actuator allows for greater control while the chrome finish prevents rust.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T396	4-Prong Steel Jaws; Chrome Finished w/Flexible Shaft	EA	1

SAWS AND SAW BLADES

Deluxe Hi-Tension Hacksaw

Hackframe featuring handle and end pieces made of die cast aluminum. Lightweight yet rigid and highly tensioned (up to 25,000 psi) for cleaner, surer cut. Permanent blade pins feature versatile angling (up to 55°) for flush cutting. Blade can be inserted in handle to be used as compass saw. Frame will fit most standard tool boxes.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-278BM0024	Replacement Blades for Hacksaw Frame 12" x 24T	EA	10
540-278HX0002	Hacksaw Frame with Blade	EA	1

Bi-Metal Reciprocating Saw Blades

Premium high speed steel with a flexible alloy back. Bi-metal blades fit all reciprocating saws with 1/2" shank.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-R8CCRF	Cast Iron-Ceramic Tile Carbide Grit 8" Long	EA	1
540-RB125W	12" x 6T Wood and Nail 3/4" x 12" x .050	EA	5
540-RB414M	4" x 14T Short Metal Cutting 3/4" x 4" x .035	EA	5
540-RB418M	4" x 18T Short Metal Cutting 5/8" x 4" x .035	EA	5
540-RB424M	4" x 24T Thin Short Metal Cutting 5/8" x 4" x .035	EA	5
540-RB610HDM	6" x 10T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB614HDM	6" x 14T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB618HDM	6" x 18T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB624HDM	6" x 24T HD Metal Cutting 3/4" x 6" x .035	EA	5
540-RB636DW	Drywall Cutting with V Head 5/8" x 6" x .035	EA	5
540-RB636W	6" x 6T Wood and Nail Slope 3/4" x 6" x .050	EA	5
540-RB656WS	6" x 6T Wood and Nail Scroll 3/4" x 6" x .050	EA	5
540-RB810HDM	8" x 10T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB814HDM	8" x 14T HD Metal Cutting 3/4" x 8" x .035	EA	5
540-RB956W	9" x 6T Wood and Nail 3/4" x 9" x .050	EA	5

SCALES

Electronic Utility Scales

Constructed for heavy duty weighing. Perfect for warehouse use, check weighing, large crates and shipping freight. Low profile platform. Control panel can be wall mounted for easy viewing. Large LCD display. Operates with AC adapter (included) or one 9V battery (not included).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
660-004	150 lb. Capacity (Pelouze #4010)	EA	1
660-005	400 lb. Capacity (Pelouze #4040)	EA	1

Utility Scales

Large easy to read dial can be viewed from top or side. Low profile enables you to slide cartons and crates onto scale. Memory Lock holds reading when dial is obscured. Perfect for shipping and receiving parcels or crates in the mailroom or warehouse.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
660-002	100 lb. Capacity (Pelouze #P100S)	EA	1
660-003	250 lb. Capacity (Pelouze #P250S)	EA	1

SCREWDRIVERS, DRIVER SETS

Pocket 4-in-1 Mini Screwdriver

This screwdriver set is ideal for technicians, hobbyists, and do it yourselfers. There are 2 double-ended vanadium blades. You can change blades instantly and the blades are held in the carrier handled. The dimensions are 1/16in. and 1/8in. slotted tips and #1 and #00 cross point. The Mini Screwdriver comes in with a convenient pocket clip and capped ends.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T744	Pocket 4-in-1 Mini Screwdriver – Length: 5-1/8" (130mm)	EA	1

SCREWDRIVERS, DRIVER SETS cont'd

Combination Screwdrivers

Multiple bits in one handy screwdriver. No need for a toolbox for those quick jobs. Lifetime guarantee.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-41	4-in-1 with #1 and #2 Phillips, 3/16 and 5/16 Slotted	EA	12
5-61	6-in-1 with #1 and #2 Phillips, 3/16 and 5/16 Slotted 1/4 Nut Driver, 5/16 Nut Driver	EA	12

SNIPS, NOTCHERS, CRIMPERS, SEAMERS

Aviation Snips

Moly alloy tool steel blade is hot drop-forged and scientifically heat-treated to provide a strong, longer lasting cutting edge. Durable serrated blades are designed to grip the metal for cutting ease. The patent pending spring on these snips is guaranteed to last for the life of the tool. Will cut 18 gauge cold-rolled steel.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-6716B	Aviation Snip – Bulldog Notching Snip – Blue Handle	EA	6
540-6716L	Aviation Snip – Cuts Left – Red Handle	EA	6
540-6716R	Aviation Snip – Cuts Right – Green Handle	EA	6
540-6716S	Aviation Snip – Cuts Straight – Yellow Handle	EA	6

HVAC Tools

Hot drop-forged carbon steel blades. Compound leverage action handles. Heavy duty plastic grips.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-FCTMC5	8" Crimper – 22 Ga. Crimping Capacity	EA	1
540-FCTMN1	8" Notcher – 31° Cutting Angle	EA	1
540-FCTMS1	3" Straight Seamer – 22 Ga. Capacity	EA	1
540-FCTMS2	3" Offset Seamer – 22 Ga. Capacity	EA	1

Offset Snips

The same high quality construction as the Aviation Snips with an additional advantage – the Offset Snips allow your hand to stay above metal for cutting ease and comfort.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-6510L	Offset Snip – Cuts Left – Red Handle	EA	6
540-6510R	Offset Snip – Cuts Right – Green Handle	EA	6

Upright Snips


This snip significantly improves sheet metal cutting. The ergonomic design allows for easier cutting in tight places, improved safety by elevating hands above metal working surfaces, and increases wrist range motion.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-6900L	Upright Snips – Left-handed Model	EA	6
540-6900R	Upright Snips – Right-handed Model	EA	6

Tinner Snips

Constructed of the finest quality high carbon tool steel. Hot drop-forged and heat-treated to assure strength and durability. "Kush-N-Cote" vinyl coated handles for added comfort. Available in a Straight Pattern for a powerful straight cutting snip or Duckbill Pattern for cutting scrolls, circles, or straight lines. 12-1/2" long.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-P127D	Duckbill Tinner Snip	EA	6
540-P127S	Straight Cutting Tinner Snip	EA	6

STRAPS, TRUCK ROPE

Truck Rope

All-purpose high strength polypropylene truck rope is C.H.P. approved.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
25001	Truck Rope – 3/8" x 50'	EA	1
CR070	Truck Rope – 3/8" x 50' (Yellow)	EA	1

Ratchet Strap

Easy ratcheting permits tie-down of appliances securely. An innovative latch and a fast release cam reduces socket wear. Cadmium-plated steel buckle has a positive lock that eliminates release due to vibration. When closed, the handle locks the latch into the sprocket to prevent inadvertent release. 16' nylon webbing rated at 3000 PSI tensile. Vinyl coated end hooks rated at 1200 PSI tensile.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS-192	Ratchet Strap – 16'	EA	3

Hanging Strap

Strong, versatile, easy way to secure loose gear safely. Tie down ladders, tubing, cylinders or almost anything in seconds. Cannot snap back. Strong, durable 1" polypropylene webbing. Reinforced grommet lets you hang it up, tie it up, hook it up or attach it permanently. Spring loaded adjustable buckle. Easy to get firm tension with no slipping. Make an endless length by connecting 2 or more together.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS-30	Hanging Strap – 31"	EA	24
HS-30-2	Hanging Strap – 31", 2 Straps per Card, pack of 12	PK	1
HS-60	Hanging Strap – 60"	EA	24
HS-60-2	Hanging Strap – 60", 2 Straps per Card, pack of 12	PK	1

Canopy Strap

Canopy ties are ideal for stretching or holding tarps and canopies tight. Easy to use and install and won't damage tarps or canopies. Convenient ball design for easy installation and securing. 10" length.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RS-TS10	Canopy Straps, 10 in, pack of 12	PK	1

Lashing Strap

Quickly lashes and secures refrigerators, air conditioners, washers, driers, etc. Strong nylon webbing rated at 3000 lbs. and end hooks at 1200 lbs. tensile strength. Hand loop for easy tightening. Steel cam lever buckle is easy to adjust and releases quickly. Secures a maximum load of 1000 pounds. 12' long.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS-144	Lashing Strap – 144"	EA	6

Heavy Duty Ratchet Strap

The Highland Titan Max Grip ratchet system is designed for heavy duty use and supports loads up to 1,000 lbs with a breaking strength of 3,000 lbs. Features include a full open grip handle that fits any size hand comfortably, soft grip, and a contoured handle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
HS-168HD	Heavy Duty Ratchet Strap	EA	2

Rubber Tie Down Strap


Can stretch to double its length. Quickly ties down ladders, tubing, cylinders or almost anything. Extra heavy steel "S" hooks on each end. Resists cracking and deterioration.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RS-9	Rubber Tie Down Strap – 10"	EA	10
RS-15	Rubber Tie Down Strap – 15"	EA	10
RS-20	Rubber Tie Down Strap – 20"	EA	10
RS-31	Rubber Tie Down Strap – 31"	EA	10
RS-41	Rubber Tie Down Strap – 41"	EA	10

Carabiners

Carabiners come in a 2 piece package and are made of 8 mm anodized aluminum. Great for attaching ropes and clipping to tool belts. For indoor or outdoor use – work or leisure. Various colors.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-CARABINER	Carabiner Clip, pack of 2	PK	1

TEST LEADS

Test Leads

Alligator clips are covered by pure vinyl boots for flexibility at any temperature without cracking.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACK4	2 Red and 2 Black Boots w/4 Alligator Clips	EA	1
FTL3	Pair, Red and Black – 36"	EA	1
FTL3D	Pair, Red and Black – Super Heavy Duty – 36"	EA	1

Multi Color Test Leads

Easy to use multi-colored test leads. 5 colors (white, red, black, yellow, green) with 2 connections each for easy testing on the job. Wire is 18 gauge, 18" long.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CT800	Multi Color Test Leads	EA	1

All Weather Test Leads


These flexible soft leads are ideal for cold months. They have medium alligator clips and insulated boots and are 300V. The leads have 10 amps and are 18 gauge. They are 36in. long and weigh 0.26 lbs.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-TL360W	All Weather Test Leads – 36" Length	EA	1

Standard Test Leads

These are handy jumper test leads with medium alligator clips and insulated boots. The wire gauge is 16 gauge with a length of 36in. The volts are 300V and these leads are 10 amps and weigh 0.12 lb.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-TL100	Standard Test Leads – 36" Length	EA	1

Magjumper

Magjumper from DiversiTech is a magnetic jumper for low voltage troubleshooting. It features a 20" length with magnetic tips that won't pop off like alligator clips sometimes can. It stays flexible even in cold weather and is perfect for recessed terminals. Magjumper is ideal for use on control boards, zone panels, thermostats, hydronics and automation controllers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MAG-1	Magjumper Terminal Kit	EA	1

TESTERS

Test Cord (Female)

Heavy duty red and black boots are on this cord. The cord has large clips, 3 wires, and is 24in. With this cord, you can get power in remote areas without an 110V outlet. The voltage is 3 to 20 V and has 125 AMPs. The wire gauge is 16 and the weight is .36 lb.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-CT700F	Test Cord (Female)	EA	1

LED Screwdriver Continuity Tester

A Screwdriver/Tester you can see! The tester is a self-test with AC Voltage test of 70 to 250 BAC. You can also check continuity and fuses. There is also a polarity check and the product has bright red LED. When the tip of the tester is in direct contact with the live (HOT) part of the AC voltage, the red LED lights up for an easier read and better accuracy.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-ST600LED	Red LED Screwdriver Continuity Tester	EA	1

Leak Test Gauge

This Gas gauge test is ideal for teasing all new installations of or leaks and passing inspection code. The special sensitive diaphragm gauges for more accurate low pressure readings.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TG-05	Leak Test Gauge – 3/4" FPT., 15 psi	EA	1
TG-30-12	Leak Test Gauge – 1/2" FPT. Conn., 30 psi	EA	1
TG-30	Leak Test Gauge – 3/4" FPT. Conn., 30 psi	EA	1
TG-30-1	Leak Test Gauge – 1" FPT. Conn., 30 psi	EA	1

THERMOMETERS/PROBES

Digital Thermometer

Temperature range from -40° F to 230° F. Packaged on attractive display card.



541-300

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
541-300	Digital Thermometer	EA	1

Deluxe Digital Pocket Thermometer

Deluxe Digital Pocket Thermometers are water and drop resistant and have a rugged construction. There is an auto power off and an F/C Switch. The probe is 2.5in. and the range is from -40 degrees F to 300 degrees F or -40 degrees C to 150 degrees C. This thermometer comes with a protective cover with clip.



6-HDT303K

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-HDT303K	Deluxe Digital Pocket Thermometer	EA	1

30:1 High Performance Ultra Wide-Range Infrared Thermometer

The Infrared thermometer is a high precision and high performance unit that can be used in most industrial applications including furnaces and heat exchangers. There is a switchable On/Off Laser sighting and also has a high/ low audible alarm. There is a Backlit LCD Display with a 10 point memory and low Battery Indicator. The product is F/C switchable and has a Min/Max/Ave along with Auto Measuring. The response time is 500 ms with a resolution of 0.1F (0.1C). An ergonomic design and electronic trigger lock make it comfortable and easy to use. The range is -25.6 to 1400 degrees F (-32 to 760C) and has a distance to spot ratio of 30:1. The thermometer has an operating temp of 32 to 122 degrees F (0 to 50 C) and includes 1 9V battery, an instruction manual, and a carrying case.



6-IRT670

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-IRT670	30:1 High-Performance Ultra Wide-Range Infrared Thermometer	EA	1

Pocket HVAC General Purpose Infrared Thermometer

A general purpose infrared thermometer is convenient and takes accurate measurements in most HVAC/R application and industrial jobs. The thermometer has a lock function, min/max readings and has a response time of 1 second. The distance to spot ratio is 6:1 and the accuracy is +/- 0.6 F/C. This easy to use item fits in your pocket and includes a 9V battery and neck strap.



6-IRT203

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-IRT203	Pocket HVAC Infrared Thermometer (Blister packed)	EA	1

Digital Psychrometer – Precision Temperature and Humidity Instrument

This product has an electronic capacitance type polymer film sensor with a microprocessorbased design. There is an F/C Switch Data hold with wet and dry bulb temperature. The accuracy on this product is +/-5% @25 C from 10 % to 90% RH Temp +/-1 C, 1 F (all temp ranges). With a low battery indicator, memory, and batteries included this item is a must!



6-SAM990DW

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-SAM990DW	Digital Psychrometer	EA	1

Pocket Thermometers

1" diameter dials with 5" stems (.145 dia.). Adjustable for recalibration. All stainless steel construction. Polycarbonate crystal. 1% accuracy full scale. Plastic pocket sheath included.




TD-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TD-1	Pocket Thermometer – 0°F to 220°F	EA	12
TD-2	Pocket Thermometer – -40°F to 160°F	EA	12

12:1 S/B Refrigeration, A/C and Food Service Infrared Thermometer

This Thermometer is ideal for sub cooling applications, particularly food service, refrigeration, and air conditioning. There is a switchable On/Off Laser sighting along with temperature data storage. There is a Backlit LCD Display with a 10 point memory and low Battery Indicator. The product is F/C switchable and has a Min/Max/Ave along with Auto Measuring. The response time is 500 ms with a resolution of 0.1F (0.1C). An ergonomic design and electronic trigger lock make it comfortable and easy to use. The range is -25.6 to 1400 degrees F (-32 to 760C) and has a distance to spot ratio of 30:1. The thermometer has an operating temp of 32 to 122 degrees F (0 to 50 C) and includes 1 9V battery, an instruction manual, and a carrying case.



6-IRT656

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
IRT657	Tools, Infrared Thermometer	EA	1

Digital Thermometer with 2 K-Type Probes and Case

This thermometer is ideal for use in labs, industrial control and audits and measuring differential temperatures. There is a dual probe input and the thermometer accepts K-type thermocouple probes. There is T1/T2 temperature differential. It is DE approved and has a data and max hold. The product includes 1 LR44 battery, molded hard case and 2 K type beaded tip probes.



6-DT8803

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DT8803	Digital Thermometer with 2 K-Type Probes and Case	EA	1

THERMOMETERS/PROBES cont'd

Horizontal Refrigerator/Freezer Analog Thermometer

With this analog thermometer, you can use it either hanging or free standing. The easy to read display can be seen with a horizontal reading. Both F and C scales are reflected on the thermometer and the range is -40 to 80 degrees F (-40 to 27C).



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-FT80H	Horizontal Refrigerator/Freezer Analog Thermometer	EA	1

Refrigerator/Freezer Analog Thermometer


This analog thermometer is stainless steel and can be used either hanging or free standing. The easy to read round dial is in F only. There are temperature indicators with a range -20 to 80 F (-29 to 27 C)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-FT80R	Refrigerator/Freezer Analog Thermometer	EA	1

Analog Pocket Thermometer with Magnifying Lens

- Range 6-320: -40° to 160°F
 - Range 6-321: -0° to 220°F
 - Rugged stainless steel probe
- Includes: Protective sheath with pocket clip.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-320	Analog Pocket Thermometer: Range -40° to 160°F	EA	1
6-321	Analog Pocket Thermometer: Range -0° to 220°F	EA	1

Jumbo Display Indoor/Outdoor Thermometer

You can measure and monitor both indoor and outdoor temperatures with this thermometer. Included are a water resistant outdoor probe with a 12 foot cable, mounting accessories, and AAA battery. This product monitors indoor temps of 32 to 122 degrees F and outdoor temps of -58 to 158 degrees F. You can either wall mount this thermometer or stand it up for a desktop display. There is a 12/24 hour clock on it as well.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-DT898P	Jumbo Display Indoor/Outdoor Thermometer	EA	1

Digital Temperature and Humidity Pen

This pen is ideal for HVAC, laboratories, hospitals, computer rooms, green houses, printing, film processing, and more. There is a simultaneous display of relative humidity and temperature. Data hold freezes measured values and an F/C switch make this a nice addition to the toolbox. The pen includes a CR2032 battery and a pocket clip on back.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-PTH8708	Digital Temperature and Humidity Pen	EA	1

Refrigerator/Oven Thermometer

The oven thermometer is made of stainless steel with a range of 150 to 600 degrees F (50 to 300C). This item can either be free standing or hanging with an easy to read dial.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-OT550	Refrigerator/Oven Thermometer	EA	1

Digital Jumbo Display Service Thermometer

For use in labs, industrial controls and food service applications. It displays ambient temperature and remote temperature via probe. The temperature alarm function with high and low limits. There is audible and visual alarm set points along with a clock display with hours and minutes. The probe is immersible in water and there is a sensor wire compartment. The thermometer comes with 1 AAA battery and a wrist strap.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-PT300M	Digital Jumbo Display Service Thermometer	EA	1

TUBE WORKING TOOLS

Kut-All Plastic Tube and Hose Cutter

Tough, durable nylon. Blade closes into its own handle for safe handling. Replaceable high carbon, teflon coated steel blades. Ideal for cutting up to 1-1/8" I.D. plastic tubing, reinforced plastic tubing, rigid plastic pipe, and rubber hose.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PK-2	Kut-All Plastic Tube and Hose Cutter	EA	1
PK-2B	Replacement Blades	EA	1

E-Z™ Ratchet II Tube and Pipe Cutter

This Cutter cuts without rotating the tool completely around the tube or pipe. This product ratchets in 5 degree increments while cutting 360 degree around the tube. With a large cutting diameter of 1/8in. to 1-1/8in. (3mm – 28mm), this cutter has the exclusive One-Hand operation. This cutter can cut copper, aluminum, brass, thin wall tubing, and stainless steel.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T135	Capacity: 1/8" to 1-1/8" (3mm-28mm)	EA	1

One-Handed PVC/Hose Cutter

The ratchet system holds the blade in place while you adjust your grip to increase the pressure. The high carbon steel blade maintains sharpness and resists chipping. These cutters can be used for cutting PVC, CPVC, Polyethylene, PEX, and ABS tubing. The cutters have a quick-blade reset and can be used as a one handed operation. With the handle locking strap for safe storage, the easy replacing blade feature, and the ergonomically designed handle, these cutters are a perfect addition to any tool box.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T1191	Capacity: 1/8" to 1-5/8"; Length: 8-1/4" (210mm)	EA	1
6-T1191BG	Replacement Blade	EA	1

E-Z™ Ratchet Tubing Cutter

The ratcheting action rotates the cutter around the tube which allows a standard size cutter to be used in close quarter applications. The longer handle requires less effort to rotate the cutter which helps reduce hand fatigue. Wide hardened flared groove rollers allow true cuts close to flared end tubing to avoid tube replacement in existing installations. This cutter can cut copper, aluminum, brass, thin wall tubing, and stainless steel. An additional cutting wheel is supplied in the handle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T133	Capacity: 5/16" to 1-1/8" (8mm – 30mm)	EA	1

Little Helper™ – All Purpose Cutter

Cuts up to 1-1/4" polyethylene, thinwall PVC, ABS, rubber hose, NM conduit and clear vinyl tubing. Reversible stainless steel blade, like two blades in one. Sturdy all metal construction.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
548-001	Little Helper™ – Carded	EA	1

Plier Flaring Tool

Our flaring tool is made of all-steel construction. The freewheeling cone self centers accurately over the tubing. Quick release allows insertion and removal of tubing easily. The quick release plier action handles hold tubing securely while flaring. The product can be used in confined areas and the vinyl handles make for comfortable use.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T152	Capacity: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8"	EA	1

TUBE WORKING TOOLS cont'd

Swivel Head Deburring Tool

This Swivel head Deburring Tool has the professional quality and the performance of a higher price deburring tool without the price tag. This product has two interchangeable blades.



6-T482

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T482	Handle length: 5-1/8" (130mm)	EA	1
6-T482A	Blade for steel, copper, aluminum and plastic	EA	1

PVC Ratchet Cutter

The high carbon steel blades on this cutter provide longer sharpness and clean cuts. The aluminum body is lighter and corrosion resistant. The safety locking clasp and ratchet action make for easy cutting. They can be used for repeated heavy duty cutting of hose, PVC, CPVC, polyethylene, PEX, and ABS of up to 2 in.



6-T118

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
6-T118	Capacity up to 2in. (50mm), Length 17in. (425mm)	EA	1

Big Helper™ PVC Pipe Cutter

Ratchet style pipe cutters cut up to 2-1/2 in. Sch. 40 PVC Pipe. Ratchet action requires minimal pressure to easily cut through PVC pipe. Molybdenum stainless steel blade won't rust or break and lasts twice as long as most competitor's. The Mega-Cutter is now available – the strongest pipe cutter on the market today!




548-007

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
548-003	1in. O.D. Cutting Capacity	EA	1
548-005	1-1/4in. O.D. Cutting Capacity	EA	1
548-007	2-1/2in. O.D. Mega-Cutter	EA	1
548-009	1-5/8in. O.D. Cutting Capacity	EA	1

WELDING TORCHES, SUPPLIES

Heat Resistant Cloth

This flame barrier drop cloth withstands temperatures to 3,000°F. No asbestos. Protects walls, floors, equipment, components and adjacent surfaces from torch flames when soldering, brazing or welding. All cloths have edges taped and sewn with grommets at each corner. Highly resistant to many chemicals and acids.



16510

16500

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
16500	18" x 18" Plain	EA	1
16510	18" x 18" Keyhole w/cutout for draping over pipes/tubes	EA	1
16520	36" x 36" Plain	EA	1

Map-Pro and Propane Gas

Map-Pro and Propane Gas are tanks that can be used to weld products.



525-MT1 525-PT1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
525-MT1	Map-Pro Gas – 14 oz.	EA	12
525-PT1	Propane Gas – 14.1 oz.	EA	12

Portable Hand Torch

Self igniting hand torch eliminates the need for a flint lighter. Lightweight and portable, this flame tool can be operated with Propane or MAP-Pro™ (Propylene). Features trigger lock with instant safety release, full size comfort grip and 360° swivel tip. Operates in any position, even upside down. Includes swirl combustion tip end.



525-TORCH

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
525-TORCH	Portable Hand Torch	EA	1

PLUMBING

CPVC-CTS Pipe and Fittings.....	182
Nylon Fittings	182-183
Oatey® Products	184
PVC Condensate Pipe	186
PVC DWV Fittings	186
PVC Primer and Cement	185
PVC Schedule 40 Pressure Fittings.....	187-190
Supports	190
Tubing, Clamps, and Kits	190-191



CPVC-CTS PIPE AND FITTINGS

CPVC-CTS Pipe by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4700-12	1/2" x 10' CPVC Pipe, 500'	EA	500'
4700-34	3/4" x 10' CPVC Pipe, 250'	EA	250'



4700-12

CPVC-CTS Fittings by FlowGuard® Gold™

CTS = Copper Tube Size

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
4701-12	1/2" Coupling S x S	EA	20
4703-12	1/2" Adapter F x S	EA	25
4704-12	1/2" Adapter M x S	EA	20
4706-12	1/2" 45° Elbow S x S	EA	20
4707-12	1/2" 90° Elbow S x S	EA	20
4711-12	1/2" Tee S x S x S	EA	20
47072-12	1/2" 90° Street Ell S x S	EA	10
4718-12	3/4" x 1/2" CPVC Bushing	EA	10
4701-34	3/4" Coupling S x S	EA	20
4703-34	3/4" Adapter F x S	EA	25
4704-34	3/4" Adapter M x S	EA	10
4706-34	3/4" 45° Elbow S x S	EA	20
4707-34	3/4" 90° Elbow S x S	EA	20
4711-34	3/4" Tee S x S x S	EA	20
47072-34	3/4" 90° Street Ell S x S	EA	10



4703-12

NYLON FITTINGS*

Male Adapter (Barb x MIPT)



701-001

Female Adapter (Barb x FIPT)



701-006

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-001	Adapter – 1/2 Barb x 1/2 MIPT, pack of 2	PK	1
701-002	Adapter – 1/2 Barb x 3/4 MIPT, pack of 2	PK	1
701-003	Adapter – 1/2 Barb x 3/8 MIPT, pack of 2	PK	1
701-004	Adapter – 1/4 Barb x 1/4 MIPT, pack of 2	PK	1
701-005	Adapter – 1/4 Barb x 3/8 MIPT, pack of 2	PK	1
701-007	Adapter – 3/4 Barb x 3/4 MIPT, pack of 2	PK	1
701-012	Adapter – 3/8 Barb x 1/2 MIPT, pack of 2	PK	1
701-013	Adapter – 3/8 Barb x 3/8 MIPT, pack of 2	PK	1
701-014	Adapter – 5/8 Barb x 3/4 MIPT, pack of 2	PK	1
701-042	Adapter – 3/8 Barb x 1/4 MIPT, pack of 2	PK	1
701-043	Adapter – 3/8 Barb x 3/4 MIPT, pack of 2	PK	1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-006	Adapter – 3/4 Barb x 3/4 NPT, pack of 2	PK	1
701-041	Adapter – 1/2 Barb x 1/2 NPT, pack of 2	PK	1
701-053	Adapter – 1/2 Barb x 3/4 NPT, pack of 2	PK	1

Bushing (MIPT x FIPT)



701-015

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-015	Bushing – 1 MIPT x 3/4 FIPT, pack of 2	PK	1
701-017	Bushing – 3/4 MIPT x 1/2 FIPT, pack of 2	PK	1

Garden Hose Adapters



701-008

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-008	Adapter – 3/4 MGHT x 3/4 FGHT, pack of 2	PK	1
701-009	Adapter – 3/4 MGHT x 3/4 FIPT, pack of 2	PK	1
701-010	Adapter – 3/4 MGHT x 3/4 MIPT, pack of 2	PK	1
701-011	Adapter – 3/4 MIPT x 3/4 FGHT, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

NYLON FITTINGS* cont'd

Elbow (Barb x Barb)



701-018

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-018	Elbow – 1/2 Barb, pack of 2	PK	1
701-023	Elbow – 3/4 Barb, pack of 2	PK	1
701-040	Elbow – 5/8 Barb, pack of 2	PK	1
701-046	Elbow – 3/8 Barb, pack of 2	PK	1

Female Adapter Elbow (Barb x FIPT)



701-019

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-019	Elbow – 1/2 Barb x 3/4 NPT, pack of 2	PK	1
701-024	Elbow – 3/4 Barb x 3/4 NPT, pack of 2	PK	1
701-055	Elbow – 1/2 Barb x 3/4 NPT Bottom Drain, pack of 2	PK	1

Male Adapter Elbow (Barb x MIPT)



701-020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-020	Elbow – 1/2 Barb x 3/4 MIPT, pack of 2	PK	1
701-025	Elbow – 3/4 Barb x 3/4 MIPT, pack of 2	PK	1
701-026	Elbow – 3/8 Barb x 1/2 MIPT, pack of 2	PK	1
701-028	Elbow – 5/8 Barb x 3/4 MIPT, pack of 2	PK	1

Hose Mender (Barb x Barb)



701-029

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-029	Hose Mender – 1/2 Barb, pack of 2	PK	1
701-030	Hose Mender – 1/4 Barb, pack of 2	PK	1
701-031	Hose Mender – 3/4 Barb, pack of 2	PK	1
701-032	Hose Mender – 3/8 Barb, pack of 2	PK	1
701-033	Hose Mender – 5/8 Barb, pack of 2	PK	1

Tee (Barb x Barb x Barb)



701-034

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-034	Tee – 1/2 Barb, pack of 2	PK	1
701-035	Tee – 1/2 x 3/4 x 1/2 Barb, pack of 2	PK	1
701-036	Tee – 1/4 Barb, pack of 2	PK	1
701-037	Tee – 3/4 Barb, pack of 2	PK	1
701-038	Tee – 3/8 Barb, pack of 2	PK	1
701-039	Tee – 5/8 Barb, pack of 2	PK	1

Elbow (FIPT x FIPT)



701-047

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
701-047	Elbow – 3/4 NPT, pack of 2	PK	1

*All fittings packaged with identification. To order nylon fittings in bulk, enter catalog number followed by the letter "B." For example, 701-001B is the bulk part number for 701-001. Bulk sold in packs of 100.

OATEY® PRODUCTS

PVC Cement – Clear

PVC Cement is clear. All cans have brushtop applicator.



5-12

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-14	Oatey #31012 – 1/4 Pint	EA	24
5-12	Oatey #31013 – 1/2 Pint	EA	24
5-10	Oatey #31014 – 1 Pint	EA	24
5-32	Oatey #31015 – 32 oz.	EA	12

Purple Primer for PVC Pipe and Fittings (Black Label)

Recommended for all PVC and CPVC installations – all sizes/schedules. Purple tinted primer formulated to remove surface dirt and grease as well as soften the pipe surface to allow for a fast, secure and permanent solvent weld. For use in areas where codes call for primer verification.




530-30756

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30755	Purple Primer – 4 oz.	EA	24
530-30756	Purple Primer – 8 oz.	EA	24
530-30757	Purple Primer – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM F-656.

Heavy Duty PVC Cement

Heavy bodied clear cement recommended for use on PVC pipe and fittings up to 12" in diameter for Sch. 40 and Sch. 80 potable water pressure pipe, gas, conduit, drain waste and vent pipe. Exceeds ASTM D-2564.



530-30863

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30850	Heavy Duty Cement – 4 oz.	EA	24
530-30863	Heavy Duty Cement – 8 oz.	EA	24
530-30876	Heavy Duty Cement – 16 oz.	EA	24

Rain-R-Shine Blue Cement

Medium bodied blue colored cement for PVC pipe and fittings up to 6 inches in diameter. A very fast setting cement formulated for wet conditions and/or when quick pressurization and fast installation is needed. Exceeds ASTM D-2564.



530-30891

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30890	Rain-R-Shine Cement – 4 oz.	EA	24
530-30891	Rain-R-Shine Cement – 8 oz.	EA	24
530-30893	Rain-R-Shine Cement – 16 oz.	EA	24

PVC Primer – Clear

Recommended for all PVC and CPVC applications. Can be used on all sizes and schedules. Formulated to remove all surface dirt, grease, and grime as well as soften the pipe in preparation for solvent cement. This primer can be used when you want a cleaner installation. Meets ASTM F-656 and is NSF listed.



530-30752

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30752	PVC Primer – Clear – 16 oz.	EA	24
530-30753	PVC Primer – Clear – 32 oz.	EA	12

All-purpose Clear Cement for ABS, PVC and CPVC Pipe and Fittings

Heavy-bodied clear cement recommended for use on ABS, PVC, and CPVC pipe and fittings up to 12" in diameter. Flows freely and provides a thick layer of cement on the pipe. Apply at temperatures 40° to 90°F.



530-30821

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30818	Clear Cement – 4 oz.	EA	24
530-30821	Clear Cement – 8 oz.	EA	24
530-30834	Clear Cement – 16 oz.	EA	24

PVC Gray Cement for High Efficiency Furnaces, Vent and Make-Up Air

Medium-bodied gray colored cement for use on Sch. 40 conduit, drain waste, and vent pipe. Flows freely and covers with a thicker layer than regular PVC. Can be applied at temperatures 40° to 100°F.



530-30884

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-30884	Gray Cement – 8 oz.	EA	24
530-30885	Gray Cement – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM D-2564.

All Weather PVC Cement

Medium bodied cement for PVC pipe and fittings up to 6". Formulated for fast initial set-up from -15°F to 100°F. Exceeds ASTM D-2564.



530-31132

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
530-31132	All Weather Cement – 16 oz.	EA	24
530-31133	All Weather Cement – 32 oz.	EA	12

PVC PRIMER AND CEMENT

**Pro-Weld™ PVC Cement
(Regular Body)**


Pro-Weld™ PVC Cement is a clear, regular bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PW-4	Pro-Weld™ – 4 oz. Brush-Top Container – Regular Body	EA	24
PW-8	Pro-Weld™ – 8 oz. Brush-Top Container – Regular Body	EA	24
PW-16	Pro-Weld™ – 16 oz. Brush-Top Container – Regular Body	EA	24
PW-32	Pro-Weld™ – 32 oz. Brush-Top Container – Regular Body	EA	12

**Pro-Weld™ PVC Cement
(Universal – PVC/ABS/CPVC)**


Pro-Weld™ Universal Cement is a clear, medium bodied, high strength cement for use on PVC to PVC, CPVC to CPVC, and ABS to ABS connections. Pro-Weld Universal sets up fast and works with all rigid schedule 40 and 80 piping up to 6 inches in diameter. Complies with ASTM D2564, D2235, and F493.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PWU-4	Pro-Weld™ – 4 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-8	Pro-Weld™ – 8 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24
PWU-16	Pro-Weld™ – 16 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24

**Pro-Weld™ PVC Cement
(Heavy Body)**


Pro-Weld™ Heavy Body is a clear, heavy bodied, very high strength industrial grade PVC cement. It has a medium setting time and works with all rigid schedule 40 and 80 pipe diameters up to 12 inches. Complies with ASTM D2564 and NSF.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PWH-4	Pro-Weld™ – 4 oz. Brush-Top Container – Heavy Body	EA	24
PWH-8	Pro-Weld™ – 8 oz. Brush-Top Container – Heavy Body	EA	24
PWH-16	Pro-Weld™ – 16 oz. Brush-Top Container – Heavy Body	EA	24

Pro-Prime™ PVC Primer (Purple)


A purple-tinted primer formulated to remove dirt and oil from the surface of Type I and II PVC piping, as well as soften the piping in preparation for solvent welding. Pro-Prime™ contains purple pigment which provides verification that the primer has been applied to the pipe surface. Pro-Prime™ meets ASTM Standard F-656.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PP-4	Pro-Prime™ – 4 oz. Brush-Top Container	EA	24
PP-8	Pro-Prime™ – 8 oz. Brush-Top Container	EA	24
PP-16	Pro-Prime™ – 16 oz. Brush-Top Container	EA	24
PP-32	Pro-Prime™ – 32 oz. Can	EA	12

**Pro-Weld™ PVC Cement
(Pool and Turf – Blue)**


Pro-Weld™ Blue Pool and Turf is a blue colored, medium bodied, high strength PVC cement for welding rigid or flexible PVC in wet conditions where the system needs to be pressurized quickly. Pro-Weld Blue Pool and Turf sets up very fast and works with all rigid and flexible schedule 40 and 80 pipe diameters up to 6 inches. Complies with ASTM D2564 and NSF.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PWB-4	Pro-Weld™ – 4 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-8	Pro-Weld™ – 8 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
PWB-16	Pro-Weld™ – 16 oz. Brush-Top Container – Pool and Turf – Blue	EA	24

Pro-Prime™ Clear PVC Primer

Clear primer that removes dirt and oil from the surface of Type I and II PVC piping. Softens the piping to prepare for solvent welding. Pro-Prime Clear primer meets ASTM Standard F-656.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PPC-4	Pro-Prime™ Clear – 4 oz. Brush-Top Container	EA	24
PPC-8	Pro-Prime™ Clear – 8 oz. Brush-Top Container	EA	24
PPC-16	Pro-Prime™ Clear – 16 oz. Brush-Top Container	EA	24
PPC-32	Pro-Prime™ Clear – 32 oz. Can	EA	12

PVC CONDENSATE PIPE

Polyvinyl Chloride, White PVC 1120

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-2001	1/2" PVC – PSI 315 – 10' Straight End	EA	500'
5-2002	3/4" PVC – PSI 200 – 10' Straight End	EA	500'
5-2005	3/4" PVC – PSI 200 – 20' Belled End	EA	500'
5-401	3/4" PVC – Sch. 40 – 10' Straight End	EA	500'
5-407	3/4" PVC – Sch. 40 – 20' Belled End	EA	500'
5-404	2" PVC – Sch. 40/DWW, ASTM 2665 – 10' Straight End	EA	100'
5-405	3" PVC – Sch. 40/DWW, ASTM 2665 – 10' Straight End	EA	50'
5-416	1" PVC – Sch. 40 – 20' Belled End	EA	200'
5-417	1-1/4" PVC – Sch. 40 – 20' Belled End	EA	200'
5-418	1-1/2" PVC – Sch. 40 – 20' Belled End	EA	200'



5-2002

PVC DWV FITTINGS

Couplings (Hub x Hub)



5-100020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-100020	2" Couplings (Hub x Hub)	EA	100
5-100030	3" Couplings (Hub x Hub)	EA	60
510-D102251	2" x 1-1/2" Couplings (Hub x Hub)	EA	25
510-D102338	3" x 2" Couplings (Hub x Hub)	EA	20

90 Elbow (Hub x Hub)



510-D304020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-300020	2" 90 Elbow (Hub x Hub)	EA	50
5-300030	3" 90 Elbow (Hub x Hub)	EA	25
510-D304020	2" Long Sweep 90 Elbow (Hub x Hub)	EA	25
510-D304030	3" Long Sweep 90 Elbow (Hub x Hub)	EA	10

45 Elbows



5-321020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-321020	2" 45 Elbow (Hub x Hub)	EA	50
5-321030	3" 45 Elbow (Hub x Hub)	EA	20
510-D323020	2" 45 Street Elbow (Hub x SPIG)	EA	50
510-D323030	3" 45 Street Elbow (Hub x SPIG)	EA	20

DWV Bend Fittings



5-300050

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-300050	2" Street Ell (Hub x SPIG)	EA	50
5-300060	3" Street Ell (Hub x SPIG)	EA	20
510-D309020	2" Long Sweep (Hub x SPIG)	EA	25
510-D309030	3" Long Sweep (Hub x SPIG)	EA	20

DWV Vent Tee



510-D441020

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
510-D441020	2" Vent Tee	EA	25

DWV Bushings



510-437338

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
510-437338	3" x 2" Reducing Bushing (SPIG x SLIP)	EA	10
510-438338	3" x 2" Bushing (SPIG x FIPT)	EA	10

PVC SCHEDULE 40 PRESSURE FITTINGS

Tee (Slip x Slip x Slip)

5-401005



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-401005	1/2" Tee	EA	50
5-401007	3/4" Tee	EA	50
5-401010	1" Tee	EA	50
5-401020	2" Tee	EA	25
5-401025	2-1/2" Tee	EA	10
5-401030	3" Tee	EA	10

90 Ell (Slip x Slip)

5-406005



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-406005	1/2" 90 Ell	EA	50
5-406007	3/4" 90 Ell	EA	50
5-406010	1" 90 Ell	EA	50
5-406020	2" 90 Ell	EA	25
5-406030	3" 90 Ell	EA	10

90 Ell Reducing (Slip x Slip)

5-406101



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-406101	3/4" x 1/2" 90 Ell Reducing	EA	50
5-406130	1" x 1/2" 90 Ell Reducing	EA	50
5-406131	1" x 3/4" 90 Ell Reducing	EA	50

90 Ell (Slip x FIPT)

5-407005



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-407005	1/2" 90 Ell	EA	50
5-407007	3/4" 90 Ell	EA	50
5-407015	1-1/2" 90 Ell	EA	25
5-407020	2" 90 Ell	EA	10
5-407025	2-1/2" 90 Ell	EA	10
5-407030	3" 90 Ell	EA	10

Tee (Slip x FIPT x Slip)

5-402007




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-402007	3/4" Tee (S x S x FIPT)	EA	50

Traps

5-409

5-408



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-408	3/4" "P" Trap	EA	100
5-409	3/4" Running Trap	EA	100
5-410	3/4" Mini "P" Trap	EA	100
5-411	1" "P" Trap	EA	50
5-412	1/2" "P" Trap	EA	100
5-414	3/4" "J" Trap	EA	100

90 Ell Reducing (Slip x FIPT)

5-407131



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-407131	1" x 3/4" 90 Ell Reducing	EA	50

90 Ell (FIPT x FIPT)

5-408007



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-408007	90 Ell (FIPT x FIPT)	EA	50

PVC SCHEDULE 40 PRESSURE FITTINGS cont'd

90 Street Ell (SPIG x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-409005	1/2" 90 Street Ell	EA	50
5-409007	3/4" 90 Street Ell	EA	50
5-409010	1" 90 Street Ell	EA	50

Plug (Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-449005	1/2" Plug	EA	50
5-449007	3/4" Plug	EA	50
5-449030	3" Plug	EA	10

90 Street Ell (MIPT x Slip)




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-410005	1/2" 90 Street Ell	EA	50
5-410007	3/4" 90 Street Ell	EA	50
5-410010	1" 90 Street Ell	EA	50

Cap (Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-447005	1/2" Cap	EA	100
5-447007	3/4" Cap	EA	100
5-447010	1" Cap	EA	50
5-447012	1-1/4" Cap	EA	25
5-447020	2" Cap	EA	25
5-447030	3" Cap	EA	10

Reducing Bushing (MIPT X FIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-439131	Reducing Bushing 1" MIPT x 3/4"	EA	100

45 Ell (Slip x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-417005	1/2" 45 Ell	EA	50
5-417007	3/4" 45 Ell	EA	50
5-417010	1" 45 Ell	EA	50
5-417012	1-1/4" 45 Ell	EA	25
5-417020	2" 45 Ell	EA	25
5-417025	2-1/2" 45 Ell	EA	10
5-417030	3" 45 Ell	EA	10

Coupling (Slip x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-429005	1/2" Coupling	EA	100
5-429007	3/4" Coupling	EA	50
5-429010	1" Coupling	EA	50
5-429012	1-1/4" Coupling	EA	25
5-429015	1-1/2" Coupling	EA	25
5-429020	2" Coupling	EA	25
5-429030	3" Coupling	EA	10

Female Adapter (Slip x FIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-435005	1/2" Female Adapter	EA	100
5-435007	3/4" Female Adapter	EA	50
5-435010	1" Female Adapter	EA	50
5-435012	1-1/4" Female Adapter	EA	25
5-435020	2" Female Adapter	EA	25
5-435030	3" Female Adapter	EA	10

Female Adapter Reducing (Slip x FIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-435074	1/2" x 3/4" Female Adapter Reducing	EA	50
5-435101	3/4" x 1/2" Female Adapter Reducing	EA	50
5-435102	3/4" x 1" Female Adapter Reducing	EA	50

Male Adapter Reducing (MIPT x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-436074	1/2" x 3/4" Male Adapter Reducing	EA	50
5-436101	3/4" x 1/2" Male Adapter Reducing	EA	50
5-436102	3/4" x 1" Male Adapter Reducing	EA	50
5-436131	1" x 3/4" Male Adapter Reducing	EA	50

Reducer Bushing (SPIG X FIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-438101	3/4" x 1/2" Reducer Bushing	EA	100
5-438130	1" x 1/2" Reducer Bushing	EA	100
5-438131	1" x 3/4" Reducer Bushing	EA	100

Male Adapter (MIPT x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-436005	1/2" Male Adapter	EA	100
5-436007	3/4" Male Adapter	EA	50
5-436010	1" Male Adapter	EA	50
5-436020	2" Male Adapter	EA	25
5-436030	3" Male Adapter	EA	10

Plug (MIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-450007	3/4" Plug	EA	50
5-450015	1-1/2" Plug	EA	25
5-450030	3" Plug	EA	10

Reducer Bushing (SPIG x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-437101	3/4" x 1/2" Reducer Bushing	EA	100
5-437130	1" x 1/2" Reducer Bushing	EA	100
5-437131	1" x 3/4" Reducer Bushing	EA	100
5-437210	1-1/2" x 3/4" Reducer Bushing	EA	25
5-437251	2" x 1-1/2" Reducer Bushing	EA	10
5-437339	3" x 2-1/2" Reducer Bushing	EA	10

Cap (FIPT)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-448007	3/4" Cap	EA	100

PVC SCHEDULE 40 PRESSURE FITTINGS *cont'd*

Adapter (Insert x Slip)



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-474007	3/4" Adapter (Insert x Slip)	EA	50

3/4" Rubber Elbow

Allows for quick disconnect and reconnect of drain lines. Made of 60 DURO EPDM.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-520	3/4" Rubber Elbows	EA	50

Clean Out Tee



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
510-3400-10	3/4" Clean Out Tee	EA	10
510-3400	3/4" Clean Out Tee	EA	50

SUPPORTS

Plastic DWV J-Hooks



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
515-J2000	2" x 9" DWV Swiveling J-Hook	EA	25
515-J3000	3" x 7-1/2" DWV Swiveling J-Hook	EA	25

TUBING, CLAMPS, AND KITS

Polyethylene Tubing

F.D.A. approved, flexible, non-toxic tubing. Tasteless and odorless, lightweight, low density. Ideal for drinking water lines, evaporative coolers, and radiant heating. I.D.: 11/64", O.D.: 1/4", Wall: 0.040, Max. W/P (in.) 150 PSI @ 70F.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PE-104	Polyethylene Tubing, 100'	EA	1

Hose Clamps

Partial stainless, worm drive, adjustable. 300 series stainless steel 1/2" band with plated 5/16" slotted hex head screw and housing, except the B-4H which has a 5/16" band and 1/4" nut. Recommended for most applications. 100% interlock construction features one-piece housing which directly locks into band. Spot weld free design.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
B-4H	No. 4, 7/32" – 5/8" dia., 3/16" – 5/16" hose I.D.	EA	10
B-6H	No. 6, 3/8" – 7/8" dia., 1/4" – 3/8" hose I.D.	EA	10
B-8H	No. 8, 7/16" – 1" dia., 5/16" – 1/2" hose I.D.	EA	10
B-10H	No. 10, 9/16" – 1-1/16" dia., 3/8" – 5/8" hose I.D.	EA	10
B-12H	No. 12, 9/16" – 1-1/4" dia., 5/8" – 3/4" hose I.D.	EA	10
B-16H	No. 16, 1-1/16" – 1-1/2" dia., 3/4" – 1" hose I.D.	EA	10
B-20H	No. 20, 3/4" – 1-3/4" dia., 1" – 1-1/4" hose I.D.	EA	10
B-24H	No. 24, 1-1/16" – 2" dia., 1-1/4" – 1-1/2" hose I.D.	EA	10
B-28H	No. 28, 1-5/16" – 2-1/4" dia., 1-1/4" – 1-3/4" hose I.D.	EA	10
B-32H	No. 32, 1-9/16" – 2-1/2" dia., 1-1/2" – 2" hose I.D.	EA	10
B-36H	No. 36, 1-13/16" – 2-3/4" dia., 1-3/4" – 2-1/4" hose I.D.	EA	10

TUBING, CLAMPS, AND KITS cont'd

Icemaker Kit

Supplies water to most refrigerators with automatic icemakers, humidifiers and evaporative coolers. Contains self-tapping valve and all necessary fittings.



750-402

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
750-401	Icemaker Kit – Poly Tube – 25'	EA	1
750-402	Icemaker Kit – Copper – 25'	EA	1

Self Tapping Water Valve

Installs on all copper tube lines from 3/8" O.D. to 1-1/8" O.D. without shutting off water. No drilling required. Features 1/4" compression fitting. Stainless steel piercing needle. Special molded gasket seals on both tubing and valve. Will not slip or turn on tubing.



QAV-2

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
QAV-2	Self Tapping Water Tap Valve	EA	1

one purchase order. **multiple advantages.**

Save **TIME**, **EFFORT** and **MONEY** With Consolidated Purchasing.




- Thousands of SKUs
- Installation and Maintenance Parts & Services
- Equipment Pads, Chemicals and Accessories



800.995.2222
WWW.DIVERSITECH.COM

DUCTLESS SYSTEMS

SpeediChannel™ Line Set Cover System	201
Equipment Support Systems.....	201
Fittings.....	201-204
Roof Inlets.....	204

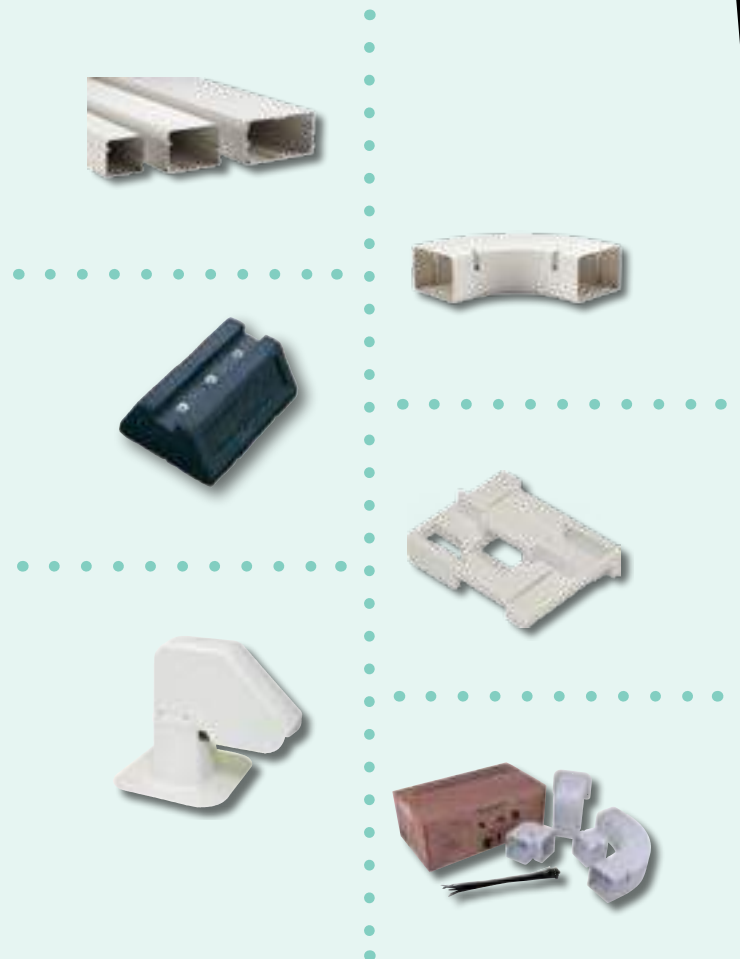

Hef-T-Foot™

Recycled rubber condensing unit and accessory mounting blocks.



ROOFTOP INSTALLATIONS



*Hef-T-Foot™ —
Rooftop/Ground Mount
Installation*



*Hef-T-Foot™ —
Rooftop/Ground Mount
Accessory/Pipe Support
Installation*

UTILITY ROOM INSTALLATIONS



*Hef-T-Foot™ —
Utility Room Installation,
Gravity Drain*

*Condensate
management
is needed for
heat pumps.*



*Hef-T-Foot™ —
Utility Room Installation,
Condensate Pump*

Hef-T-Bracket™ — Wall Mounted Mini-Split Brackets



HEF-T-BRACKET™ TYPE 2

These brackets feature a cross bar that is attached to a wall and two L-shaped brackets that are hooked and bolted into place on the cross bar.

When operating in heat pump mode, the unit will produce condensate which is easily captured and managed using this snap on drain pan.

SpeediChannel™ Line Set Cover System

DiversiTech SpeediChannel™ is an innovative channel system used to cover air conditioning line sets. The two part system has a base and a cover. The base is fastened to a wall or ceiling, then a clever little plastic clip (SpeediClip™) snaps into a channel already molded into the base. Then, using standard cable ties, the line set, cables, control wires, and/or condensate drain line are fastened in place. The cover then snaps simply on top of the base.



The SpeediChannel™ system is available in three widths – 3", 4", and 6". Each piece of Speedi-Channel™ is 6-1/2 feet long. A complete line of couplings, elbows, and tees are available for the SpeediChannel™ system.

Manufactured from rigid PVC, the SpeediChannel™ system is a natural color that is a very close match to the typical mini-split condensing unit case. However, the Speedi-Channel™ system can be painted as desired to match any wall color. Use paint made for plastic only. The PVC used in the SpeediChannel™ system is resistant to UV light and is UL rated.




DiversiTech recommends attaching the base to the wall or ceiling and the line sets to the system every 15" to allow for the system to carry the full weight of the line sets.

The SpeediChannel™ can also be used inside.



*Cut your installation time!
SpeediClip™— fastest
SpeediChannel™
installation.*

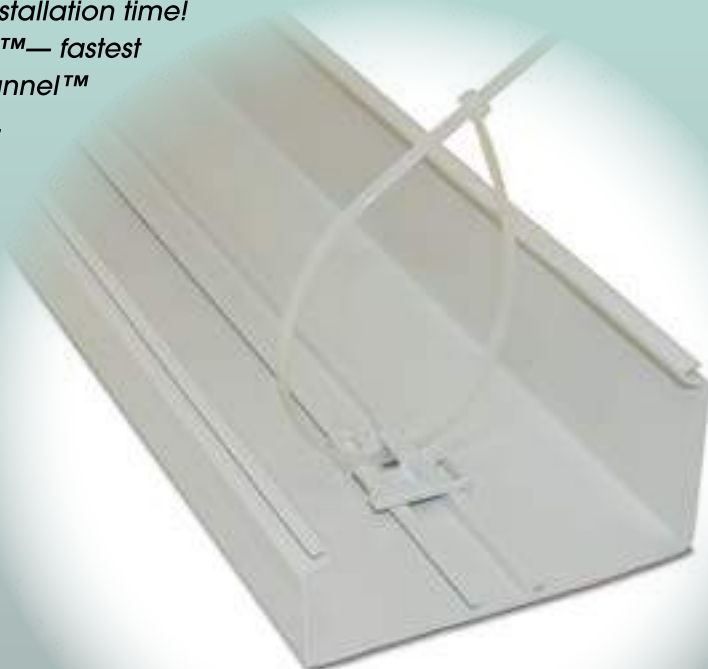

DiversiTech SpeediChannel™ System

SIZING CHART AND SELECTION INFORMATION

Maximum Line Set, Drain Pipe, and Cable Capacity using 3/8" Insulation





Model	230-D3	230-D4	230-D6
Dimensions	3" x 2-1/2"	4" x 2-3/4"	6" x 3"
Length	78"	78"	78"

Mini-Split Systems – Liquid and Suction Line with 3/8" Insulation

Liquid Line	3/8"	2 x 1/4"	1 x 1/4" + 2 x 3/8"
Suction Line	5/8"	2 x 3/8"	1 x 1/2" + 2 x 5/8"
Drain Hose	3/4" OD	2 x 3/4" OD	3 x 3/4" OD
Power Cable	1 x UF 14-3	2 x 1/2" SealTite	3 x 1/2" SealTite
Control Cable	1 Pair 18 AWG	2 Pairs 18 AWG	3 Pairs 18 AWG
Nominal Tonnage	1–3 Tons	1x3 Ton or 2x1 Ton	1x3 Ton or 2x2 Ton

Conventional Split Systems – Liquid Line Plain, Suction Line with 3/8" Insulation

Liquid Line	3/8"	3/8"	3/8"
Suction Line	3/4" or 7/8"	1-1/8"	1-1/8"
Drain Hose	3/4" PVC	3/4" PVC	3/4" PVC
Power Cable	1 x UF 14-2	1 x 1/2" SealTite	1 x 1/2" SealTite
Control Cable	1 Pair 18 AWG	1 Pair 18 AWG	1 Pair 18 AWG
Nominal Tonnage	Up to 3.5 Tons	4–5 Tons	7.5 Tons and up

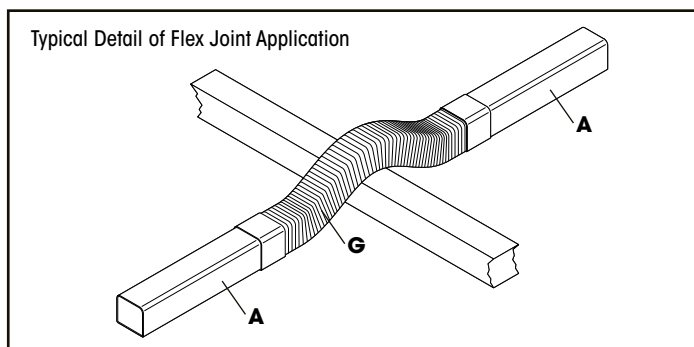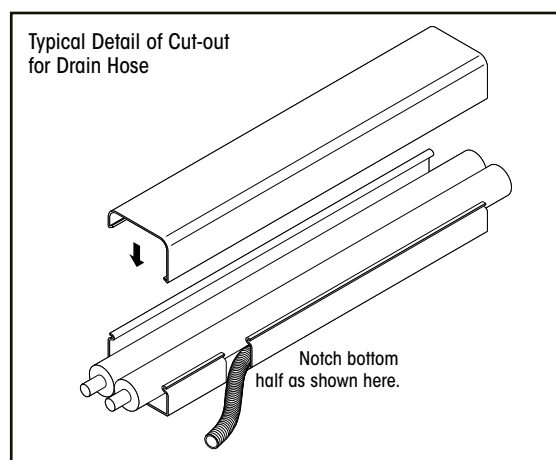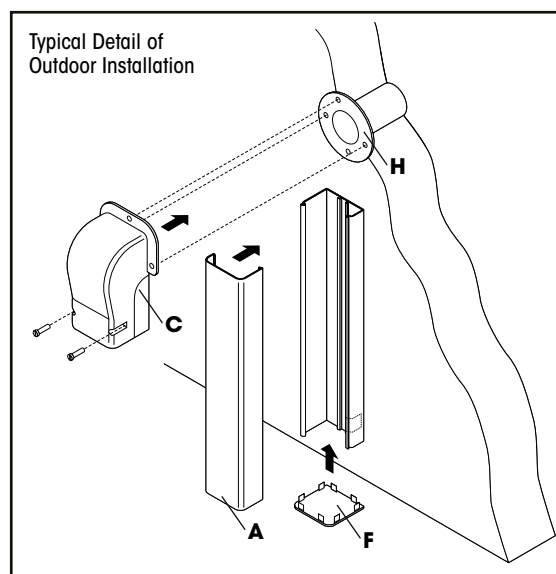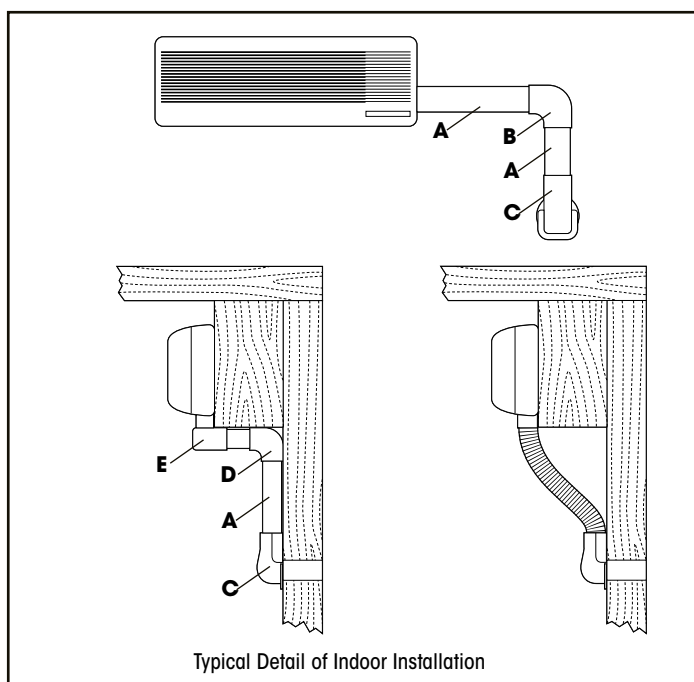






- A - 230-D
- B - 230-FB
- C - 230-WC
- D - 230-EB
- E - 230-EIN
- F - 230-DC
- G - 230-FJ
- H - 230-WS2

NOTE:
Suffix parts A-G
with the duct
size needed
(3, 4, or 6)

DiversiTech SpeediChannel™ System

TECHNICAL SPECIFICATIONS

Color	Natural			
Size	230-D3: 3" x 2-1/2" OD	230-D4: 4" x 2-3/4" OD	230-D6: 6" x 3-1/8" OD	Standard Length: 78"
Material	Weather Resistant PVC, UV Stabilized and Fire Resistant			
Fire Rating	Meets UL 94V-0			
Temperature Range	-4°F TO 140°F			
Weather Resistance	Tested to over 2,000 hours			
Fixing Screws	Stainless Steel			

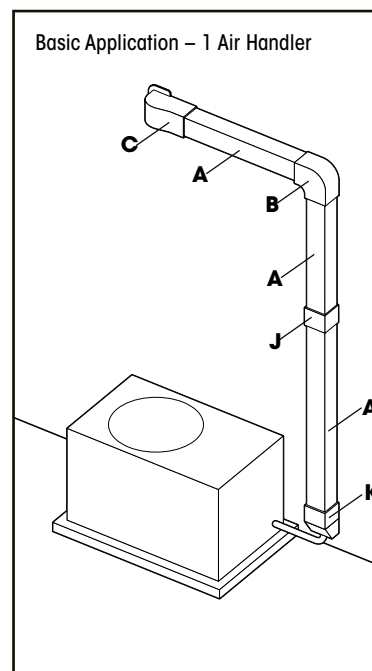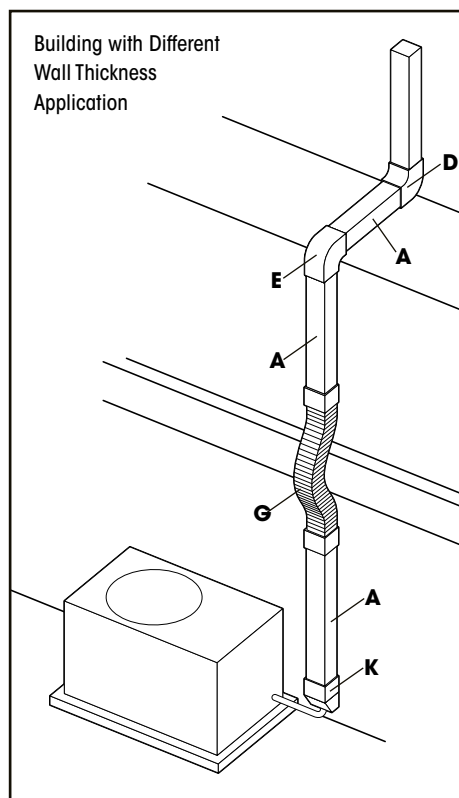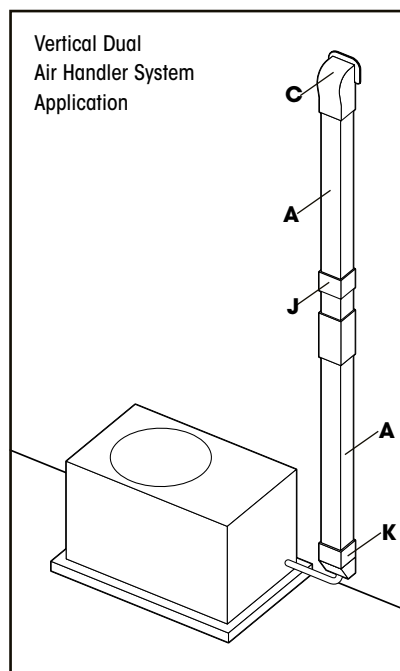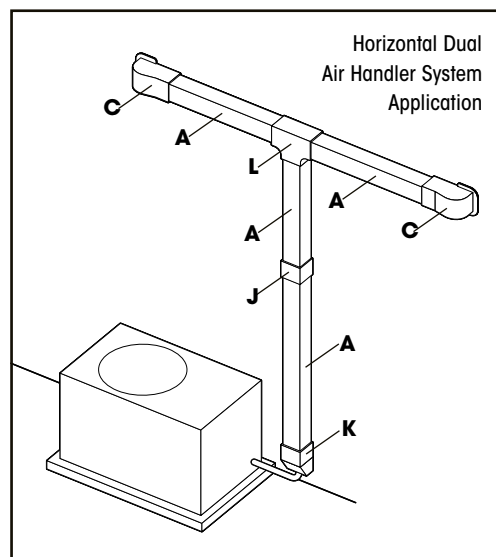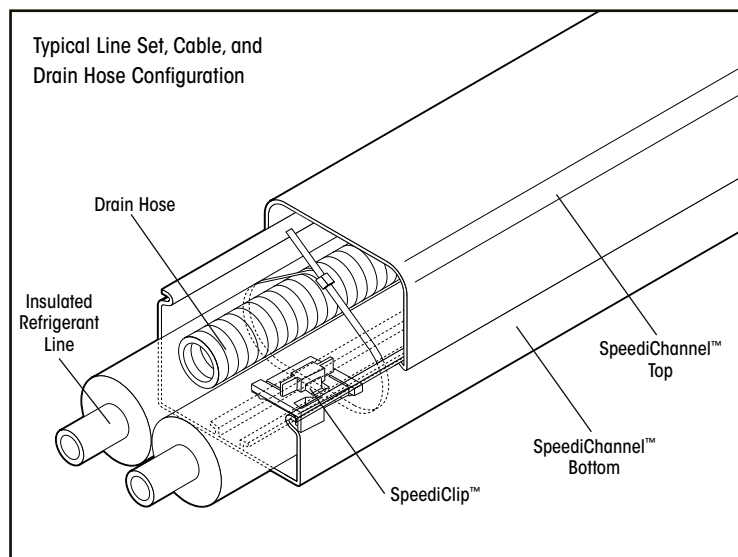

- A - 230-D
- B - 230-FB
- C - 230-WC
- D - 230-EB
- E - 230-EIN
- F - 230-DC
- G - 230-FJ
- H - 230-WS2
- J - 230-CP
- K - 230-DE
- L - 230-TC

NOTE:
Suffix parts A-G
with the duct
size needed
(3, 4, or 6)

SpeediChannel™ System Installation

Step 1

Attach the SpeediChannel™ base to the wall about every 15 inches with screws suitable for the wall construction (siding, stucco, brick, etc.). Screw through the center of the molded rail. Slide the connecting piece (elbow, union, tee, etc.) under the SpeediChannel™ before attaching the end of the channel to the wall. When cutting lengths of SpeediChannel™, allow 1/8" gap between the end of the SpeediChannel™ and the stop inside the fitting to allow for thermal expansion.



Step 2

Attach one SpeediClip™ with cable tie about every 20 inches along the inside sliding rail.



Step 3

Install the line set, drain line, and wires inside the SpeediChannel™. Test the equipment installation prior to tightening the cable ties. Tighten the cable ties snug, but not so tight they damage the tubing insulation or kink the drain line. Trim excess length from the cable tie.



Step 4

Attach the SpeediChannel™ to the base.



Step 5

Attach the fitting covers with the screws provided.



Step 6

When complete, paint the SpeediChannel™ to match surface of installation (if desired).



SPEEDICHANNEL™ LINE SET COVER SYSTEM

SpeediChannel™

The DiversiTech SpeediChannel™ is available in three widths, all in 6-1/2 feet lengths. Includes pack of SpeediClips™.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-D3	3" SpeediChannel™	EA	6
230-D4	4" SpeediChannel™	EA	6
230-D6	6" SpeediChannel™	EA	5


Channel must ship LTL.

EQUIPMENT SUPPORT SYSTEMS

Hef-T-Foot™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or an alternative to supporting condensing units, air source heat pumps or a variety of outdoor equipment.

The Hef-T-Foot™ with strut comes in four lengths — 9.8", 15.7", 23.6", 39.4". They are manufactured from heavy duty recycled rubber and come complete with .8" x 1.6" galvanized steel strut adhered to the rubber with industrial adhesive. The rubber is strong and durable with drain slots moulded into the underside to allow standing water to flow under the foot.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FF-250-S	Hef-T-Foot™ – 9.8" with 1.6" x .8" strut	EA	1
FF-400-S	Hef-T-Foot™ – 15.7" with 1.6" x .8" strut	EA	1
FF-600-S	Hef-T-Foot™ – 23.6" with 1.6" x .8" strut	EA	1
FF-1000-S	Hef-T-Foot™ – 39.4" with 1.6" x .8" strut	EA	1
FF-250-UNI	Hef-T-Foot™ – 9.8" Universal	EA	1

Hef-T-Foot™ Installation Variants



FITTINGS

Adjustable Flat Bend

Adjustable flat bends flex from 45 to 90 degrees and make it easy to route the SpeediChannel™ around an obstacle. Each adjustable bend is individually packed and includes stainless steel screws.



CATALOG NO.	DESCRIPTION	ORDER UOM	ORDER MULTIPLE
230-AFB3	3in. Adjustable Flat Bend	EA	10
230-AFB4	4in. Adjustable Flat Bend	EA	10

Soffit Fittings

Ideal for outdoor applications where the SpeediChannel™ runs up an exterior wall and enters the house vertically through the soffit. Its large flat surface area easily covers the rough opening cut in the soffit. Furnished in two parts, the Soffit Fitting easily snaps onto the SpeediChannel™ for a clean installation.



CATALOG NO.	DESCRIPTION	ORDER UOM	ORDER MULTIPLE
230-SF3	3" Soffit Fitting	EA	10
230-SF4	4" Soffit Fitting	EA	10

FITTINGS cont'd

Wall Penetration

Wall sleeves and penetration covers are used to transition from the SpeediChannel™ system to a through wall penetration. The wall sleeve creates a neat hole through the wall, and the line set is covered by the wall cover. DiversiTech's wall covers are designed to allow for easy installation - even after the line set has been installed. A unique hooking and fastening arrangement allows for quick and easy installation. Each wall cover is individually packed, and is furnished complete with stainless steel screws to attach the wall cover to the base. Three screws (supplied by others) are needed to fasten the wall cover to whatever type of wall construction the system is being installed on.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-WC3	3" Wall Penetration Cover	EA	10
230-WC4	4" Wall Penetration Cover	EA	10
230-WC6	6" Wall Penetration Cover	EA	10
230-WS2	2-1/2" Wall Sleeve	EA	10

**230-WC3****230-WS2**

90° Long Radius Bend

90° long radius flat bends are used to route the SpeediChannel™ around an obstacle. The long radius of the elbow allows a gentle bending radius on the copper line set. Each elbow is individually packed, and is furnished complete with stainless steel screws.

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-LFB3	3" 90 deg Long Radius Bend	EA	10
230-LFB4	4" 90 deg Long Radius Bend	EA	10
230-LFB6	6" 90 deg Long Radius Bend	EA	10

**230-LFB4**

90° Inside Elbow

90° inside elbows are used to route the SpeediChannel™ around an inside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.

**230-EB3**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-EB3	3" 90 degree Inside Elbow	EA	10
230-EB4	4" 90 degree Inside Elbow	EA	10
230-EB6	6" 90 degree Inside Elbow	EA	10

90° Flat Bend

90° flat bends are used to route the SpeediChannel™ around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.

**230-FB3**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-FB3	3" 90 deg Flat Bend	EA	10
230-FB4	4" 90 deg Flat Bend	EA	10
230-FB6	6" 90 deg Flat Bend	EA	10

45° Flat Bend

45° flat bends are used to route the SpeediChannel™ around an obstacle. Each bend is individually packed, and is furnished complete with stainless steel screws.

**230-FB453**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-FB453	3" 45 degree Flat Bend	EA	10
230-FB454	4" 45 degree Flat Bend	EA	10
230-FB456	6" 45 degree Flat Bend	EA	10

90° Outside Elbow

90° outside elbows are used to route the SpeediChannel™ around an outside corner. Each elbow is individually packed, and is furnished complete with stainless steel screws.

**230-EIN3**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-EIN3	3" 90 degree Outside Elbow	EA	10
230-EIN4	4" 90 degree Outside Elbow	EA	10
230-EIN6	6" 90 degree Outside Elbow	EA	10

FITTINGS cont'd

Union Coupling

Used for joining two pieces of SpeediChannel™ — each cover being the same size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-CP3	3" Union Coupling	EA	10
230-CP4	4" Union Coupling	EA	10
230-CP6	6" Union Coupling	EA	10

Flex Joint

An accordion style piece of SpeediChannel™, the flex joint can be extremely flexible routing a SpeediChannel™ system around virtually any type of obstacle. Each joint is 20" long and can be combined together for longer flex runs. Unlike competitor systems, the DiversiTech flex joint does NOT require the use of a union coupling. The DiversiTech flex joint slides tightly inside the SpeediChannel™ system.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-FJ3	3" Flex Joint	EA	10
230-FJ4	4" Flex Joint	EA	10

Duct End

The duct end is used to terminate a run of SpeediChannel™ to a small opening — just large enough for the line set and condensate drain line to pass through. Gives a neat/clean installation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DE3	3" Duct End	EA	10
230-DE4	4" Duct End	EA	10
230-DE6	6" Duct End	EA	10

T-Joint

Used for creating a tee connection between three pieces of SpeediChannel™ — all covers being the same size. The tee can be combined with the reducing coupling to join SpeediChannel™s of different sizes. Each tee is individually packed, and is furnished complete with stainless steel screws.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-TJ4	4" T-Joint	EA	10
230-TJ6	6" T-Joint	EA	10

Reducer Coupling

Used for joining two pieces of SpeediChannel™ — each cover being a different size. Each coupling is individually packed, and is furnished complete with stainless steel screws.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-TC34	3" x 4" Reducer Coupling	EA	10
230-TC46	4" x 6" Reducer Coupling	EA	10

Cap

Used to cap the end of a SpeediChannel™ run. Easily snaps into the end of the SpeediChannel™.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DC3	3" Cap	EA	10
230-DC4	4" Cap	EA	10
230-DC6	6" Cap	EA	10

FITTINGS cont'd

Flat Wall Escutcheon

Typically used to cover a rough opening in a soffit, wall, or ceiling penetration. One side of the escutcheon is flat to allow for a SpeediChannel™ run going along a wall, and penetrating through an adjacent wall or ceiling. This is the most common type of wall penetration. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel™.



230-FR3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-FR3	3" Flat Wall Escutcheon	EA	10
230-FR4	4" Flat Wall Escutcheon	EA	10
230-FR6	6" Flat Wall Escutcheon	EA	10

SpeediChannel™ Accessories

A variety of accessories that are complementary or required for installing DiversiTech's SpeediChannel™ system.



230-DCLIP

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-DCLIP-10	SpeediClip™ and 11" Cable Ties, pack of 10	PK	1
230-DCLIP	*SpeediClip™, pack of 50	PK	1
230-DSCREW	SpeediChannel™ screws, pack of 100	PK	1
WTB11C	Black Wire Ties – 11", pack of 100	PK	1

*Sold Separately.

Universal Pump Elbow

The Universal Pump Elbow lets an installer use any mini pump of their choice and install it with SpeediChannel. Includes pump elbow and reservoir mounting brackets to fit most mini-split pumps.



230-PFB3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-PFB3	Universal Pump Elbow	EA	1

Wall Escutcheon

Typically used to cover a rough opening in a wall or ceiling penetration. The hole in the escutcheon is centered to allow for a free standing SpeediChannel™ to penetrate through a wall or ceiling. This is the fairly un-common type of wall or ceiling penetration. Check carefully, as you may need the Flat Wall Escutcheon. Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel™.



230-WR3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-WR3	3" Wall Escutcheon	EA	10
230-WR4	4" Wall Escutcheon	EA	10
230-WR6	6" Wall Escutcheon	EA	10

SpeediChannel™ Kits

The SpeediChannel™ Fitting Kit provides a simple mix of the basic fittings used in a typical SpeediChannel™ installation job. Included are one coupling, one wall penetration, one inside elbow, one long radius flat bend, and one pack of ten SpeediClips and 11" cable ties. The 230-IKC3 and 230-IKC4 Installation Kits include three 48" pieces of channel and selected fittings.



230-IK3

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-IK3	3" SpeediChannel™ Fitting Kit	EA	1
230-IK4	4" SpeediChannel™ Fitting Kit	EA	1
230-IKC3	3" SpeediChannel™ Installation Kit	EA	1
230-IKC4	4" SpeediChannel™ Installation Kit	EA	1

ROOF INLETS

Roof Inlets

"Roof entrance" adapters for linesets are the ultimate solution for a professional flat roof installation. Manufactured from UV weather resistant plastics, the Roof Inlet combines a series of features:

- the Roof Inlet body part is equipped with a slope avoiding possible damage to the insulation and preventing kinks into the copper tubes.
- the Roof Inlet base holes allow a steady fixation (depending on the roof surface type and composition).
- the Roof Inlet cap is firmly fixed to the body with stainless steel bolts.



230-INJ465

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
230-INJ465	SpeediChannel™ Roof Inlet – 5"	EA	2
230-INJ462	SpeediChannel™ Roof Inlet – 10"	EA	2

MAINTENANCE CHEMICALS

Accessories	219-220
Additives	229
Coil Cleaners	218-219
Coil Cleaning Aerosols	220
Drain Pan Disinfectant, Sealant	220
Flushing Products	222
Glycols	221
Hoses, Sprayers	223
Ice Machine Products	224
Leak Detectors.....	224
Odor Neutralizers.....	224
Pan Treatments	225
Pan Treatments/Disinfectants	225-226
Refrigeration Oils.....	226-227
System Cleaners.....	227
Test Kits, Strips, and Prevention	227
Thread Sealants.....	228
Vacuum Pump Oil.....	228




Triple-D™ Universal Coil Cleaner™

Triple-D™ is a Universal Coil Cleaner™ suitable for use on condenser and evaporator coils. It is metal safe and does not attack aluminum or copper coil components, extending equipment life and diminishing potential for refrigerant leaks. Triple-D™ is a safer, more versatile product than conventional acid or non-acid coil cleaners. One product does it all — truly a Universal Coil Cleaner™.

FEATURES	BENEFITS
<i>Universal Coil Cleaner™</i>	One product for multiple applications reduces inventory and eliminates potential product mis-application.
<i>Metal Safe</i>	Conventional foaming acid coil cleaners actually attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. Conventional foaming non-acid coil cleaners are so strong (because they lack the unique inhibitor in Triple-D™) they also attack the aluminum coil components. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil, and creates the potential for refrigerant leaks. Over time, the reduction in heat transfer ability for the coil increases energy consumption significantly.
<i>Super Concentrated</i>	Lower cost per mixed gallon. Triple-D™ is a 6:1 dilution ratio, making 7 gallons of usable product per gallon of concentrate.
<i>Multiple Packages/Forms</i>	Available as a concentrated liquid, pre-diluted liquid, aerosol, or Granular Coil Cleaner™. Same product — different packages.
<i>NSF Registered</i>	Assurance that Triple-D™ is safe as a cleaner in restaurants, hospitals, government institutions, and any food preparation area. Rinse thoroughly after use.
<i>Safe for Rubber Roofs</i>	Does not damage engineered polymeric or rubber roofing.
<i>Corrosion Inhibited</i>	Conventional foaming acid and non-acid coil cleaners actually attack and chemically react with the aluminum (and sometimes copper) coil components. This reaction is exhibited by a foaming action. The reaction dissolves the aluminum, destroying the heat-transfer ability of the coil, and creates the potential for refrigerant leaks.
<i>Biodegradable</i>	Triple-D™ is manufactured from chemicals that break down naturally in the environment. When a coil is cleaned, the rinse water is typically washed into the storm sewer.
<i>Non-Foaming</i>	Foaming of coil cleaners is exhibited when the cleaner chemically reacts with the aluminum (and sometimes the copper) coil components. This reaction is exhibited by a foaming action. The reaction dissolves the aluminum, destroying the heat-transfer ability of the coil, and creates the potential for refrigerant leaks. Additionally, foaming action on foaming coil cleaners is an exothermic (heat generating) chemical reaction. This heat is extreme and can damage coils.
<i>Non-Toxic</i>	Triple-D™ is manufactured from chemicals that break down naturally in the environment. When a coil is cleaned, the rinse water is typically washed into the storm sewer. Conventional acid coil cleaners contain dangerous hydrofluoric acid that is extremely toxic to humans and animals.
<i>Inhibited Non-Acid Formulation</i>	Triple-D™ contains a unique inhibitor that allows for a very strong alkaline (non-acid) formulation that effectively cleans coils. Other non-acid coil cleaners are either too weak to effectively clean a coil, or are so strong (and hence foaming) that they attack the aluminum coil.

Aluminum Loss of Foaming Coil Cleaners vs. Triple-D™

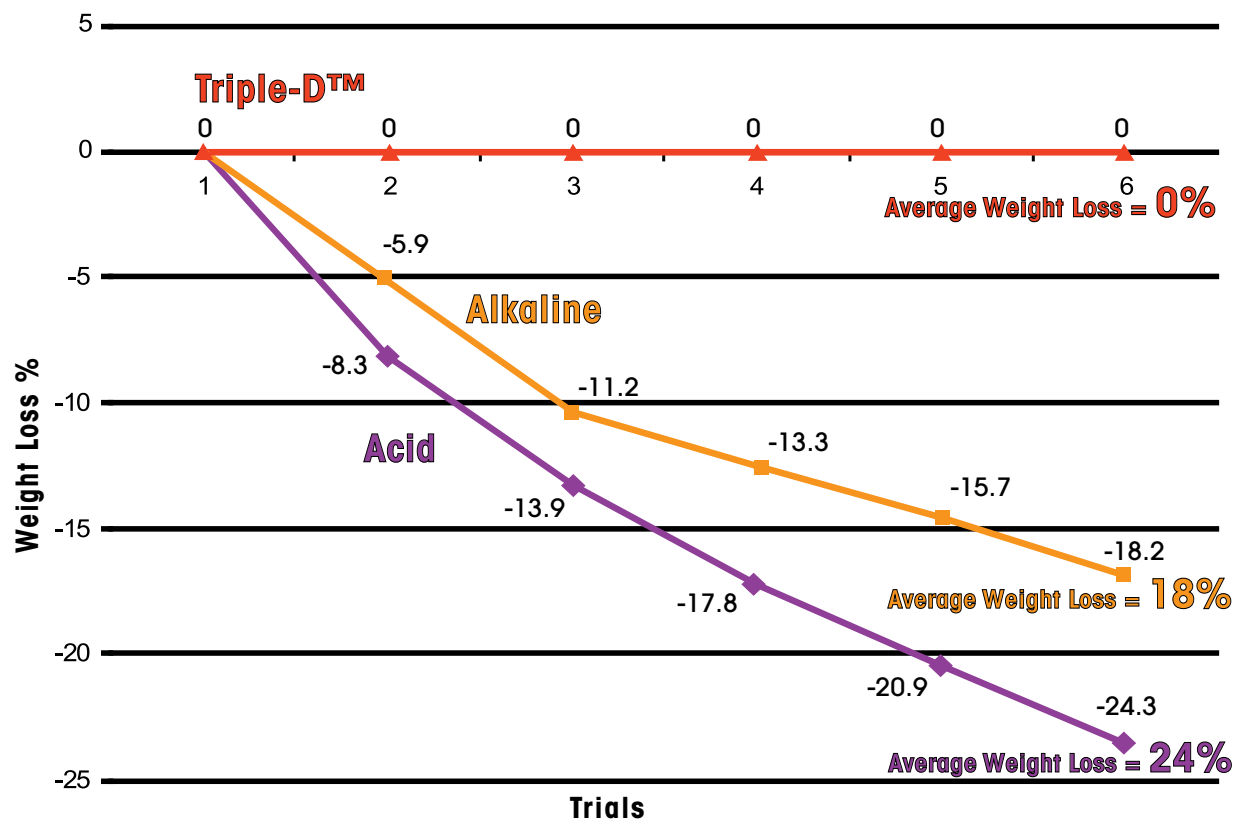

As shown above, conventional foaming acid coil cleaners and foaming non-acid coil cleaners actually attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil and creating the potential for refrigerant leaks.



LineSeal™ Refrigerant Line Sealant

LineSeal™ System Leak Sealant:

- stops refrigerant leaks
- prevents future leaks
- improves system performance



LineSeal™ permanently seals system leaks in refrigerant lines.

LineSeal™ is a fast, effective way to permanently seal system leaks in refrigerant lines. LineSeal™ stops existing leaks and remains in the system to prevent future leaks. It is compatible with all oils and refrigerants and will not contaminate the refrigerant.

FIXES THE LEAKS FAST

Refrigerant leaks can cause cooling system failure, are costly, and bad for the environment. Stopping leaks is critical to effective system performance and satisfied customers. LineSeal™ is a self-contained, vacuum packed canister of sealant that is released into a refrigerant system. The sealant travels with the oil and refrigerant throughout the system. Where the system leaks, the refrigerant escapes and lowers the surrounding air temperature down to the dew point where micro droplets of water are deposited around the perimeter of the leak area. The sealant reacts with the droplets of water to harden into a protective barrier to keep refrigerant from escaping.

LineSeal™ that hasn't been used remains in the system as an inert component, ready to seal future leaks and provide years of protection for your system.

NO PROPANE OR BUTANE PROPELLANTS

Unlike many sealant products, LineSeal™ uses no harmful hydrocarbon (propane or butane) chemicals, assuring that the system remains safe and contaminate free.

Propane and butane are used in some sealants and could potentially contaminate the refrigerant which is then technically a mixed gas that does not meet ARI purity standards. Once hydrocarbon (HC) gases are mixed with HFC or HCFC refrigerants, they are nearly impossible to remove. LineSeal™ vacuum-packed canister pulls refrigerant from the system to charge the canister and injects the sealant straight into the refrigerant line, so that no harmful propellants are needed.

LineSeal™ is designed for most residential systems and is compatible with CFC, HFC, HCFC refrigerants and mineral oil, alkylbenzene, and POE systems.

For systems up to 1.5 tons



LS-1

For systems from 1.5 - 5 tons



LS-2

OTHER FEATURES:



Compatible with all oils and refrigerants



Designed for residential systems



Doesn't harm compressors or other components



New hose with each kit



No access valve clogging



Pressure relief valve



Pro-Flush™ HVAC Flushing Solvent

Pro-Flush™ answers your need for a professional quality flushing solvent with the components to match.

- Formulated for R-410A retrofits, refrigerant conversions and compressor burnouts
- Lower cost solution than competitive pre-charged kits
- Solvents are non-VOC, conform to EPA SNAP standards, and are non-HAZMAT
- Low toxicity and residue free
- Flash Point: No flash point to boiling (41°C/106°F) - TAG Closed Cup (per ASTM D-56)
- Kit includes reusable tank with a pressure relief valve for added safety, a hose, and an injector trigger nozzle
- Better delivery system



FREQUENTLY ASKED QUESTIONS

Q: What refrigerants is Pro-Flush™ compatible with?

A: Pro-Flush™ is compatible with CFC and HFC refrigerants and compressor oils.

Q: Is Pro-Flush™ safe to use?

A: Pro-Flush™ is safe, nontoxic, and residue free. In addition, Pro-Flush™ conforms to EPA's Significant New Alternatives Program (SNAP) standards.

Q: Is Pro-Flush™ HAZMAT?

A: Pro-Flush™ is not HAZMAT for storage or ground transportation.

Q: What is the advantage of the reusable injector tank?

A: 1. The reusable tank lowers cost since you only need to buy the Pro-Flush™ refill cans.
2. Pre-charged cans include refrigerant propellants which are more expensive to use than nitrogen.
3. The trigger assembly allows for infinite control of dosage insuring more economical use of the solvent.
4. Using nitrogen as the propellant is less expensive and more environmentally friendly than using HFC-134A. HFC-134A is a powerful greenhouse gas. One kilogram of HFC-134A has the same global warming impact as 1,430 kilograms of carbon dioxide (<http://www.epa.gov/cpd/mac/service>).

Q: Can the injector tank be over pressurized during nitrogen pressurization?

A: Over pressurization is highly unlikely but possible. The injector valve has a reseating pressure relief safety valve set at 200 psi. This helps prevent potential bursting and resultant injury.

Q: What if I don't require the entire can of Pro-Flush™ Solvent to clean a system or line set?

A: The injection nozzle allows you to control the dose rate and any left over solvent can be stored in the injector for future use.

Q: How does the dose rate for Pro-Flush™ for burnouts and retrofits compare with the competitors?

A: For R22 to 410A conversions, we recommend 3-second bursts of solvent. An 8 oz. can of Pro-Flush™ will treat up to 250 feet of liquid line. For burnouts, we recommend 2-3 oz. per ton. Pro-Flush™ uses less solvent per application than Nu-Calgon. Treatment results will vary depending on the application and conditions of the line set when serviced.

Q: Why do you recommend only charging the injector tank to 50psi, then injecting in 3 second bursts?

A: Tests are conclusive that injecting the solvent at lower pressure assures longer solvent to oil contact time. In addition, the smaller volume delivered in short bursts assists in completely dissolving contaminants. In this case, less is better.

Q: Is nitrogen necessary for use with Pro-Flush™?

A: Nitrogen is used as the propellant for Pro-Flush™. Nitrogen is required with all flushing systems to purge any residual solvent and contaminants through the system.

Q: Do pre-charged canister systems dispense 100% of the flushing solvent?

A: In many cases pre-charged canister systems will not fully dispense the flushing solvent depending on temperature. At lower temperatures, the R-134a propellant provides less pressure and may leave solvent in the canister. The Pro-Flush™ system allows contractors to add additional nitrogen if there is still solvent left, regardless of temperature.



HVAC Maintenance Chemical Comparison Chart



Product Name	Product Color	Product Description	Nu-Calgon
TRIPLE-D	amber USDA	Universal Coil Cleaner	NO EQUIVALENT
PRO-GREEN	green USDA	Alkaline Evaporator Coil and System Cleaner, Degreaser	Evap Pow'r-C
PRO-BLUE	blue	Maximum Foaming Alkaline Condenser Coil Cleaner, Degreaser and Brightener	Nu-Brite
PRO-BROWN	brown	Ultra High Foaming Alkaline Condenser Coil Cleaner, Degreaser and Brightener	Alka-Brite Plus
PRO-RED+	red	Foaming Acid Coil Cleaner and Brightener (contains no hydrofluoric [HF] acid)	Cal-Brite
PRO-BUBBLE	pink	Freeze-Protected Polymer Based Spray Leak Detector	Cal-Blue & Fluorescent Gas Leak Detectors
SANI C-N-D	blue 	Air Handler and Drain Pan Disinfectant	Bio-Fresh
FLOW-PLUS	blue	Long Lasting Polymer Pan Treatment	Pan Pads

Virginia KMP	Stewart Hall	Rectorseal	Hydro-Balance	Ace	Vapco
THERE IS NO EQUIVALENT TO TRIPLE-D					
Acti-Kleen	Coil-Rite	Concentrated Evaporator	Hydro-Coil	Non-Rinse Evaporator Cleaner	H.P. Cleaner
Alki-Foam	Renewz	Alkaline Extra Strength	Hydro-Kleen	Alkaline Coil Cleaner	Foaminator
Foam-Max	Foam-A-Coil	NO EQUIVALENT	Black Max	Foam-n-Clean	Foamtastic
Acti-Brite	Con-Coil	Condenser Coil Cleaner	Hydro-Foam	Supreme Coil Cleaner	Brite-Alum
Locator Leak Detector	NO EQUIVALENT	Better Bubble	NO EQUIVALENT	Fast Find Leak Detector LT	Low Temp Bubbles
NO EQUIVALENT	Coil & Duct Disinfectant	NO EQUIVALENT	NO EQUIVALENT	Bacti-Gard	NO EQUIVALENT
CDC Anti-Clog	Actabs	NO EQUIVALENT	Slime Away	Pan Protector	Pan Pills



Authorized by USDA for use in Federally inspected meat and poultry plants



EPA Registered

Condensate Pan Treatments – SIMPLIFIED

THE NEED

Environmental debris, slime, rust, etc. accumulate in condensate drain pans resulting in:

- Indoor Air Quality problems including musty odors and Dirty Sock Syndrome
- Pan overflows caused by plugged drain lines
- Equipment malfunction

THE SOLUTION

Use pan treatment products as part of a regular preventive maintenance program to:

- Eliminate one of the causes of Sick Building Syndrome
- Stop costly overflow problems that damage floors, ceilings, and furniture
- Reduce unscheduled service calls

THE PRODUCTS

EXTENDED RELEASE TREATMENTS

- Several manufacturers produce various time release products
- Highest value — most active ingredient per dollar
- Easiest maintenance program — dose only once every three months or longer
- Only effective solution for equipment larger than six tons

RAPID RELEASE TREATMENTS

- Lowest cost per tablet
- Shortest time between dosing



Super



Best



Good



Economy

Flow-Plus™ Condensate Pan Treatment

- A true water activated, time release treatment
- Water soluble polymer leaves no residue or carrier to be removed
- Adheres to drain pans — eliminates product floating and blocking the drain line
- No corrosive vapors — safe for computer rooms
- Recommended dosage — choose size according to equipment tonnage. Each size is designed to last a minimum of three months.

FLOW-PLUS-25	— 1/2 to 3 tons
FLOW-PLUS-200	— 1/2 to 3 tons
FLOW-PLUS-6	— 3 to 5 tons
FLOW-PLUS-10	— 5 to 20 tons
FLOW-PLUS-125	— 20 to 50 tons

STACKABLE!

This unique feature increases the time between maintenance visits.



Pro-Treat® 151 Premium Condensate Drain Pan Treatment

- EPA Registered
- Kills algae and eliminates odors
- Fast acting
- Residual effect of the clean pan lasts for a month
- No corrosive vapors — safe for computer rooms
- Recommended dosage: 1 tablet for every 3 tons each month

Pro-Treat® 161 Condensate Drain Pan Treatment

- More active ingredient than the economy version
- Fast acting
- Residual effect of the clean pan lasts for about a month
- No corrosive vapors — safe for computer rooms
- Recommended dosage: 2 tablets for every 3 tons each month

Pro-Treat® 200 Condensate Drain Pan Treatment

- Lowest cost product per tablet
- Sufficient active ingredient to treat the pan
- No corrosive vapors — safe for computer rooms
- Recommended dosage: 3 tablets for every 3 tons each month

3-STEP PROCESS for Solving IAQ Problems

1



STEP 2: DISINFECT

SANI C-N-D™ Coil and Drain Pan Disinfectant

Disinfect and deodorize the evaporator coil and drain pan with SANI C-N-D™, an EPA registered biocide, fungicide, viricide, and mildewstat. The broad spectrum biocide in SANI C-N-D™ assures control of many airborne pathogens that can be spread via contaminated air handling equipment.

STEP 1: CLEAN

TRIPLE-D™ Degreaser • Detergent • Deodorant

Clean the evaporator coil and condensate pan with TRIPLE-D™, a USDA authorized non-foaming alkaline coil cleaner. Cleaning the dirt from the coil and pan not only improves equipment efficiency, but also removes an important source of contamination that can create slime and sludge in the drain pan and cause pan overflow.



2

The American Lung Association states that most people spend 90% of their time indoors¹. DiversiTech offers the 3-STEP PROCESS to help control IAQ problems caused by the micro-organisms in the atmosphere in which we live and work.

¹www.lungusa.org

STEP 3: MAINTAIN

FLOW-PLUS™ Condensate Pan Treatment

Place FLOW-PLUS™ in the condensate pan (choose size according to equipment tonnage below). FLOW-PLUS™ is a totally soluble long term polymer treatment that keeps the drain pan and condensate lines clean for a minimum of three months. This prevents pan overflow problems.

PRODUCT NO.	EQUIPMENT TONNAGE
FLOW-PLUS-25	1/2 to 3 tons
FLOW-PLUS-200	1/2 to 3 tons
FLOW-PLUS-6	3 to 5 tons
FLOW-PLUS-10	5 to 20 tons
FLOW-PLUS-125	20 to 50 tons

3




Why clean coils?

CONDENSER COIL

Cleaning the condenser coil does one thing — improves the heat transfer efficiency between the refrigerant inside the coil and the ambient air outside. The more efficient this heat transfer, the more efficiently the cooling system operates.

With efficient heat transfer and an efficiently operating condensing unit, the system consumes less energy because it draws less current. By lowering current consumed in the unit, the life of the equipment is extended.

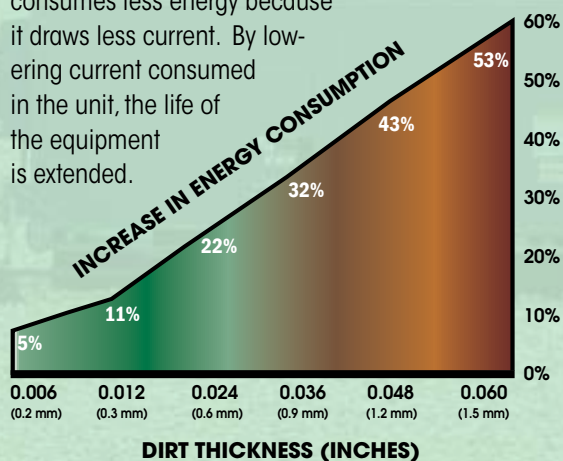

EVAPORATOR COIL

Cleaning the evaporator coil improves indoor air quality. It addresses building related illness and sick building syndrome.

How frequently should coils be cleaned?

We recommend a minimum of twice per year, more frequently if there is dirty ambient air.



COIL CLEANERS

Triple-D™ Universal Coil Cleaner

Triple-D™ is a Universal Coil Cleaner suitable for use on condenser *and* evaporator coils. Metal safe and does not attack aluminum or copper coil components, extending equipment life and diminishing potential for refrigerant leaks. Safe for rooftop units.

Triple-D™ is available in a package to fit any contractors needs — super concentrated liquid, pre-mixed trigger sprayer, convenient aerosol, and industry leading Granular Coil Cleaner. In liquid form, Triple-D™ is super concentrated. A single gallon of concentrate makes 75% more mixed coil cleaner than conventional concentrations. The liquid concentrate is also NSF Registered, assuring that it is safe as a cleaner in restaurants, hospitals, government institutions, and any food preparation area (rinse thoroughly after use).

Triple-D™ is a safer, more versatile product than conventional acid or non-acid coil cleaners. One product does it all — truly a Universal Coil Cleaner.

TRIPLE-D



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
TRIPLE-D	Triple-D™ – 1 gallon concentrate	EA	4
TRIPLE-D-5	Triple-D™ – 5 gallon concentrate	EA	1
TRIPLE-D-AER	Triple-D™ – 19 oz. Aerosol	EA	12
TRIPLE-D-GRAN	Triple-D™ – 1 lb. Granular	EA	12
TRIPLE-D-32	Triple-D™ – 32 oz. bottle – concentrate	EA	12
TRIPLE-D-RTU	Triple-D™ – 1 quart trigger sprayer – pre-diluted	EA	12
TRIPLE-D-55	Triple-D™ – 55 gallon drum	EA	1
TRIPLE-D-FC	Triple-D™ – 1 gallon concentrate FOR CANADA	EA	4
TRIPLE-D-RTU-FC	Triple-D™ – 1 quart spray FOR CANADA	EA	12

Eco-Coil™ Environmentally Friendly Coil Cleaner

Eco-Coil™ is an effective, environmentally friendly coil cleaner and brightener. Eco-Coil™ uses biodegradable, earth-friendly components to quickly clean away dirt and deposits. This formula is effective on both indoor and outdoor coils and cleans while protecting the environment from harsh chemicals.

ECO-COIL



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ECO-COIL-32	Eco-Coil™ Environmentally Friendly Coil Cleaner – 32 oz. bottle	EA	12
ECO-COIL	Eco-Coil™ Environmentally Friendly Coil Cleaner – 1 gallon container	EA	4
ECO-COIL-5	Eco-Coil™ Environmentally Friendly Coil Cleaner – 5 gallon pail	EA	1
ECO-COIL-55	Eco-Coil™ Environmentally Friendly Coil Cleaner – 55 gallon drum	EA	1

Pro-Brown™


An ultra-high foaming formula that pulls out deeply embedded dirt. The fast, dual-action formula cleans and brightens. Pro-Brown™ is biodegradable and safer than foaming hydrofluoric acid cleaners.

PRO-BROWN



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-BROWN-32	Pro-Brown™ Foaming Coil Cleaner – 32 oz. bottle	EA	12
PRO-BROWN	Pro-Brown™ Foaming Coil Cleaner – 1 gallon container	EA	4
PRO-BROWN-5	Pro-Brown™ Foaming Coil Cleaner – 5 gallon pail	EA	1
PRO-BROWN-55	Pro-Brown™ Foaming Coil Cleaner – 55 gallon drum	EA	1

ALUMINUM LOSS OF FOAMING COIL CLEANERS VS. TRIPLE-D™

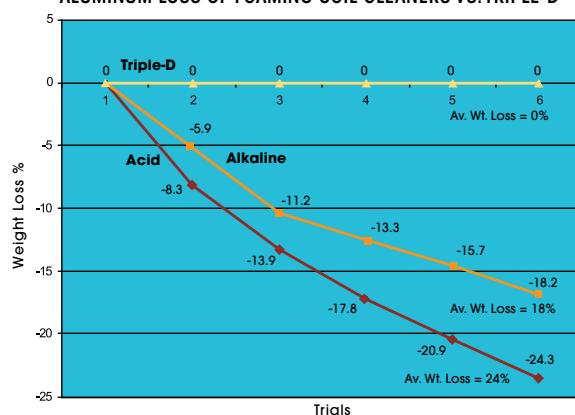

Conventional foaming acid and non-acid coil cleaners attack and chemically react with the aluminum coil components. This reaction is exhibited by a foaming action. The attack/reaction dissolves the aluminum, destroying the heat-transfer ability of the coil and creating the potential for refrigerant leaks.

Pro-Blue™

Pro-Blue™ is a heavy-foaming, alkaline-based coil cleaner which will assist in removing the build-up on your air-cooled condenser. Buy Pro-Blue™ and help your condenser look as good as new.

PRO-BLUE



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-BLUE-32	Pro-Blue™ Foaming Concentrate (non-acid) – 32 oz. bottle	EA	12
PRO-BLUE	Pro-Blue™ Foaming Concentrate (non-acid) – 1 gallon container	EA	4
PRO-BLUE-5	Pro-Blue™ Foaming Concentrate (non-acid) – 5 gallon pail	EA	1
PRO-BLUE-55	Pro-Blue™ Foaming Concentrate (non-acid) – 55 gallon drum	EA	1

Pro-Green™

Pro-Green™ is a non-toxic, self rinsing evaporative coil cleaner which is a safe-to-use product on your evaporator coils. This coil cleaner can also be used on air-cooled condensers, electronic filters and fan blades.

PRO-GREEN



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-GREEN-32	Pro-Green™ No Rinse (non-toxic) – 32 oz. bottle	EA	12
PRO-GREEN	Pro-Green™ No Rinse (non-toxic) – 1 gallon container	EA	4
PRO-GREEN-5	Pro-Green™ No Rinse (non-toxic) – 5 gallon pail	EA	1
PRO-GREEN-55	Pro-Green™ No Rinse (non-toxic) – 55 gallon drum	EA	1

COIL CLEANERS cont'd

Pro-Red Plus™

Pro Red Plus™ Non Acid Coil Cleaner and Brightener is an easy to use, concentrated, fast acting product that foams and lifts away stubborn deposits from air cooled condensers and coils. It removes tarnish and corrosion deposits, and leaves a bright clean shine on aluminum and copper coils.

Pro Red Plus™ Non Acid Coil Cleaner and Brightener cleans by chemical action. Its brightening properties are as effective as conventional acid coil cleaners, but Pro Red Plus™ does not contain extremely toxic hydrofluoric acid. The vigorous foaming action eliminates the need for prolonged soaking, steam cleaning or scrubbing coils. Non acid formula does not emit corrosive fumes, and will not rust ferrous metals

PRO-RED+



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-RED+32	Pro-Red Plus™ Cleaner and Brightener (non-acid) – 32 oz. bottle	EA	12
PRO-RED+	Pro-Red Plus™ Cleaner and Brightener (non-acid) – 1 gallon container	EA	4
PRO-RED+5	Pro-Red Plus™ Cleaner and Brightener (non-acid) – 5 gallon pail	EA	1
PRO-RED+55	Pro-Red Plus™ Cleaner and Brightener (non-acid) – 55 gallon drum	EA	1

Fresh-Coil

Specifically designed for use with mini split wall and ceiling cassettes. Fresh-Coil features a 3' (1 meter) hose with a brass spray nozzle for easy reach into and behind indoor cassette coils.

FRESH-COIL



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FRESH-COIL	Fresh Coil cleaner for mini split cassettes, 15oz	EA	12

Pro-Yellow™

Pro-Yellow™ is an easy to apply, non-acid coil cleaner and brightener. This effective formula quickly removes dirt and grime from outdoor coils and leaves them clean and bright. It's strong foaming action removes even stubborn deposits easily.

PRO-YELLOW



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-YELLOW-32	Pro-Yellow™ (non-toxic) – 32 oz. bottle	EA	12
PRO-YELLOW	Pro-Yellow™ (non-toxic) – 1 gallon container	EA	4
PRO-YELLOW-5	Pro-Yellow™ (non-toxic) – 5 gallon pail	EA	1
PRO-YELLOW-55	Pro-Yellow™ (non-toxic) – 55 gallon drum	EA	1

Pro-Kleen™

A unique foaming acid coil cleaner designed to replace hazardous hydrofluoric acid coil cleaners. It contains a synergistic combination of mineral acids, corrosion inhibitors, biodegradable surfactants, penetrants, and degreasers that emulsify, solubilize and neutralize soils leaving a clean, bright, efficient coil surface. The easy-rinse formula removes a broad range of soils and does not contain dangerous hydrofluoric or bipotassium phosphate.

PRO-KLEEN



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-KLEEN	Pro-Kleen™ Outdoor Coil Cleaner – 1 gallon container	EA	4
PRO-KLEEN-5	Pro-Kleen™ Outdoor Coil Cleaner – 5 gallon pail	EA	1
PRO-KLEEN-55	Pro-Kleen™ Outdoor Coil Cleaner – 55 gallon drum	EA	1

ACCESSORIES

Coil Guard™

Ideally used in coastal areas, where salt air accelerates rust and decay. Highly recommended for use in all geographical areas to prolong the life of a unit. When applied properly, Coil Guard™ dries quickly and immediately resists salt spray, alcohol, acids, and soap solutions. Weather will not blacken it. Coil Guard™ has high dielectric properties and has no effect on heat transfer. Our blue tinted product is used to ensure complete coverage of coating.

CG-AER



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CG-AER	Clear Coil Guard™ – 20 oz. Aerosol	EA	12
CGB-AER	Blue Coil Guard™ – 20 oz. Aerosol	EA	12

Cool-Weld™ Heat Barrier Spray

Spray on thick gel formula that protects surfaces from heat and damage. Odorless, non-toxic gel coats rubber, plastic, and painted surfaces to shield them during welding or soldering.

COOLWELD-32



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
COOLWELD-32	Cool-Weld™ Heat Barrier Spray – 32 oz. Container	EA	12

ACCESSORIES cont'd

Pan-Patch™

Pan-Patch™ is a two part epoxy coating with anti-microbial additives designed for HVAC applications. It is a self leveling formula that is ideal in a damp or wet environment. Pan-Patch™ resists corrosion and stops pan leaks without replacing the pan. Light gray in color, one gallon covers about 160 square feet with 10 mil thickness.

PANPATCH



CATALOG NO.	DESCRIPTION	COVERAGE	UOM	ORDER MULTIPLE
PANPATCH-BAG	Pan-Patch™ Pan Sealant – Bag, pack of 10	8 sq. ft.	EA	10
PANPATCH-32	Pan-Patch™ Pan Sealant – 1 Quart	40 sq. ft.	EA	9
PANPATCH	Pan-Patch™ Pan Sealant – 1 Gallon	160 sq. ft.	EA	4

COIL CLEANING AEROSOLS

Saf-N-Kleen™ Aerosol Solvent Coil Cleaner

High-solvency formula quickly and easily dissolves dirt, grease, oil or other residue while the blasting nozzle separates the materials from the surface. Non-flammable, non-conductive formula is safe to use on live equipment.

357-20



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
357-20	Saf-N-Kleen™ Solvent Coil Cleaner – 18 oz. Aerosol	EA	12

Foam-Plus™ Aerosol Foaming Coil Cleaner

Heavy-duty foaming detergent coil cleaner in an aerosol can. Non-flammable and water-based with no chlorinated solvents. Blasting foam stream reaches into tight areas for maximum cleaning. The foaming alkaline detergent quickly liquifies dirt, grease, oil or other residue and is completely self-rinsing on condensate producing coils.

358-20



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
358-20	Foam-Plus™ Foaming Coil Cleaner – 19 oz.	EA	12
358-20S	Foam-Plus™ - Spanish Label - 19 oz.	EA	12

DRAIN PAN DISINFECTANT, SEALANT

Sani C-N-D™ Coil and Drain Pan Disinfectant

Sani C-N-D™ is an EPA registered disinfectant, fungicide, mildewstat and viricide. It is ready-to-use and assures consistent, effective results. Sani C-N-D™ destroys "dirty sock," mildew and other malodors.

SANI-CND



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SANI-CND-32	Sani C-N-D™ Disinfectant – 32 oz. Container	EA	12
SANI-CND	Sani C-N-D™ Disinfectant – 1 Gal. Container	EA	4
SANI-CND-5	Sani C-N-D™ Disinfectant – 5 Gallon Pail	EA	1
SANI-CND-55	Sani C-N-D™ Disinfectant – 55 Gallon Drum	EA	1

Pan-Kote Heavy Duty Drain Pan Patch

A super-durable rubberized coating used to fill-in and patch HVAC drain pans. Seals out rust and corrosion. Stays flexible in variable weather conditions.

641-14



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
641-14	Pan-Kote Drain Pan Patch – 14 oz. Aerosol	EA	12

GLYCOLS

DiversiTech produces the most complete line of industrial coolant and heat transfer products in the HVAC/R Industry. Our product line includes ProTek PG propylene glycol products formulated with food-grade corrosion inhibitors and ProTek EG ethylene glycol products for industrial applications. Both product groups are designed to provide freeze and burst protection and are formulated with inhibitors and antifoam agents to provide long-term stability against system corrosion and fouling.

ProTek EG™

An inhibited ethylene glycol based heat transfer fluid designed for use in hydronic, chilled and closed water.



CATALOG NO.	DESCRIPTION	GLYCOL/ WATER RATIO	UOM	ORDER MULTIPLE
EG	ProTek EG™ – 1 Gallon Jug	95/5	EA	4
EG-5	ProTek EG™ – 5 Gallon Pail	95/5	EA	1
EG-55	ProTek EG™ – 55 Gallon Drum	95/5	EA	1

ProTek™ Closed Loop Heat Transfer Fluid

ProTek™ for closed loop water recirculation systems is a blue liquid. Available in three concentrations: original ProTek-100™, ProTek-50™, and ProTek-Plus™. Each concentration may be further diluted to alter freeze and burst temperatures. Refer to the technical data sheet for specific information.



CATALOG NO.	DESCRIPTION	GLYCOL/ WATER RATIO	UOM	ORDER MULTIPLE
PG-50	ProTek-50™ – 1 Gallon Jug	35/65	EA	4
PG-50-5	ProTek-50™ – 5 Gallon Pail	35/65	EA	1
PG-50-55	ProTek-50™ – 55 Gallon Drum	35/65	EA	1

ProTek™ PG 100

ProTek 100™ is an inhibited propylene glycol based industrial heat transfer fluid and antifreeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek 100™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek 100™ provides burst protection to 100°F. Freeze points and burst points are controlled by the propylene glycol to water ratio.



CATALOG NO.	DESCRIPTION	GLYCOL/ WATER RATIO	UOM	ORDER MULTIPLE
PG-100	ProTek-100™ – 1 Gallon Jug	70/30	EA	4
PG-100-5	ProTek-100™ – 5 Gallon Pail	70/30	EA	1
PG-100-55	ProTek-100™ – 55 Gallon Drum	70/30	EA	1

ProTek™ PG Plus

ProTek PLUS™ is an inhibited propylene glycol based industrial heat transfer fluid and anti freeze that contains food grade corrosion inhibitors. It is suitable for use in potable water systems. ProTek PLUS™ is designed to provide freeze and burst protection, excellent thermal conductance, protection against corrosion and fouling and long term stability in closed recirculating water loops. ProTek PLUS™ must be mixed with water to provide freeze and burst protection. Freeze points and burst points are controlled by the propylene glycol to water ratio.



CATALOG NO.	DESCRIPTION	GLYCOL/ WATER RATIO	UOM	ORDER MULTIPLE
PG-PLUS	ProTek-Plus™ – 1 Gallon Jug	95/5	EA	4
PG-PLUS-5	ProTek-Plus™ – 5 Gallon Pail	95/5	EA	1
PG-PLUS-55	ProTek-Plus™ – 55 Gallon Drum	95/5	EA	1

ProTek BG™ for Cast Iron Water Boilers

A red liquid boiler grade product formulated specifically with corrosion inhibitors necessary for use in water boilers.



CATALOG NO.	DESCRIPTION	GLYCOL/ WATER RATIO	UOM	ORDER MULTIPLE
PG-BG	ProTek-BG™ – 1 Gallon Jug	70/30	EA	4
PG-BG-5	ProTek-BG™ – 5 Gallon Pail	70/30	EA	1
PG-BG-55	ProTek-BG™ – 55 Gallon Drum	70/30	EA	1

FLUSHING PRODUCTS

Pro-Flush™ HVAC Flushing Solvent

A flushing solvent for A/C and refrigeration systems formulated for R410A retrofits, refrigerant conversions and compressor burnouts. Compatible with all refrigerants and compressor oils. All solvents in Pro-Flush™ are non VOC and conform to EPA SNAP standards: low toxicity and residue free. Available as a kit or in an 8 or 16 oz. solvent refill. The kit makes servicing quick, easy, and safe, as well as assuring you get to the job site with all necessary hardware in hand for 1 stop servicing. The kit includes: 8 oz. container of Pro-Flush™ solvent, refillable Pro-Flush™ injector tool pressure tank, pressure relief valve for added safety, large rubber adapter that flushes up to 1-1/4" line sets, service hose.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PF-KIT	Pro-Flush™ Kit – injector, 8 oz. refill, nozzle adapter and hose	EA	3
PF-08	Pro-Flush™ HVAC Flushing Solvent – 8 oz. Refill	EA	6
PF-16	Pro-Flush™ HVAC Flushing Solvent – 16 oz. Refill	EA	6
PF-ADAPTER	Pro-Flush™ Line Set Adapter	EA	1
PF-IGUN	Replacement Injector Tool	EA	1
PF-IHOSE	2' Replacement Hose	EA	1



Now Includes
ONE SHOT
Solvent
Can

Pro-Flush® HVAC FLUSHING SOLVENT

Pro-Flush® answers your need for a professional quality flushing solvent with the components to match.

- Formulated for R-410A retrofits, refrigerant conversions and compressor burnouts
- Lower cost solution than competitive pre-charged kits
- Low toxicity and residue free
- Kit includes reusable tank with a pressure relief valve for added safety, a hose, and an injector trigger nozzle
- Better delivery system

DIVERSiTECH®
diversitech.com

HOSES, SPRAYERS

Power Sprayer

DiversiTech's Power Sprayer makes coil cleaning easier and faster! Designed as a backpack sprayer, it holds up to 4 gallons of coil cleaning solution. The battery powered unit will spray continuously for 10 hours on a single charge. Included are three different nozzles to give you the right spray for any situation. It also features: padded backpack straps for a comfortable fit, plug-in charger for fast recharging, a convenient center mount handle, an extra long spray wand with curved tip for accurate application, and a large on/off valve which can lock in position for easier spraying of big jobs. The large tank opening also makes it easy to add coil cleaner and mix to the correct ratio. The Power Sprayer is compatible with all DiversiTech coil cleaners.



PS-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PS-1	Battery powered/rechargeable backpack sprayer for coil cleaning	EA	1

Dial-a-Mix Sprayer

Save time and money by dialing in the exact mix ratio to properly clean the coil. This sprayer features 5 mix ratios, a 1/2 gallon capacity bottle and a quick disconnect for fast and easy rinsing.




540-GUN

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-GUN	Dial-a-Mix Sprayer	EA	6

Garden Hose

High quality product priced for high volume sales. Soft-Flex formulation makes the 5 ply Hose easy to handle. Withstands 500 psi water pressure. Heavy duty solid brass couplings and collar. Full Lifetime Guarantee!



5-IG5850

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-IG5850	Green Flexon 5-Ply Forever Garden Hose	EA	5

All Purpose Sprayers

Lightweight, versatile gallon size bottle has a 28" flexible hose and easy-to-carry handle. Best for big jobs in hard-to-reach places. Adjustable nozzle will atomize any low viscosity liquid. Adjusts from a mist to a 12' jet stream or anything in between. One pint container has a measured ounce guide. Ideal for water treatment chemicals.



BS-64

BS-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BS-64	Gallon Size Sprayer	EA	6
BS-16	Pint Size Sprayer	EA	12
BS-32	Quart Size Sprayer	EA	12

Compression Sprayers

Acid impervious poly design with a 36" (91cm) reinforced hose, shut-off with lock-on feature for continuous spraying, a 2-piece nozzle that's detachable for easy clean up and fits directly to the shut-off or extension wand. The Hand-Held Sprayer has a 48 oz. (1.4 l) capacity, perfect for small areas. All sprayers have a full 5 year warranty.




1002

2601

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
1002	Hand Held Sprayer	EA	1
2601	1 Gallon Wand Sprayer	EA	1
2602	2 Gallon Wand Sprayer	EA	1
2603	3 Gallon Wand Sprayer	EA	1

Hot Water Hose

High burst strength. 500 PSI. Withstands hot water up to 160°F. EPDM tube. Heavy duty solid brass couplings.



5-HW5850

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
5-HW5850	5/8" x 50' Hot Water Hose	EA	5

Pistol Grips & Water Nozzle

Pistol Grip – 540-572 Insulated:

For spraying hot or cold water. Heavy-duty, self adjusting "duck" packing for lifetime proof seal.

Water Nozzle – 540-573 Un-insulated:

Heavy-duty and holds open clip for continuous spraying. Self-adjusting "duck" for leak proof seal.



540-573

540-572

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
540-572	Insulated Pistol Grip	EA	12
540-573	Uninsulated Water Nozzle	EA	12

ICE MACHINE PRODUCTS

Super-Kool™ Nickel-Safe and Metal-Safe Ice Machine Cleaner

An economical, fast-acting, non-foaming acid sequestant formula that quickly removes soil and mineral buildup. This safe, highly-concentrated, inhibited formula will not attack nickel or other metal components. USDA AUTHORIZED



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SUPER-KOOL-16	Super-Kool™ Ice Machine Cleaner – 16 oz. Bottle	EA	12
SUPER-KOOL	Super-Kool™ Ice Machine Cleaner – 1 Gallon Container	EA	4

LEAK DETECTORS

Bubble-N-Trouble™ Freeze Protected Spray-On Leak Detector

Non-corrosive, non-toxic, and biodegradable. Does not attack metal or interfere with brazing or soldering. Spray-on application allows easy access for hard to reach places. Tacking agent holds solution on test surface making Bubble-N-Trouble™ very economical. USDA AUTHORIZED



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
BNT-32	Bubble-N-Trouble™ Freeze Protected Leak Detector – 32 oz. Spray	EA	12
BNT-1	Bubble-N-Trouble™ Freeze Protected Leak Detector – 1 Gallon Container	EA	4

Pro-Bubble™ Leak Detector

Easy-to-use, high-bubbling, viscoelastic blue leak detector. New improved formula.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-BUBBLE-32	Pro-Bubble™ Leak Detector – 32 oz. Bottle with Spray Top	EA	12

Radiant Leak Finder™

Radiant color and viscous clinging formula exposes the smallest leaks. Freeze-protected – remains effective down to 0° F.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RLF-8	Radiant Leak Finder™ – 8 oz. Container	EA	12

ODOR NEUTRALIZERS

Duct-Fresh Gel

A non-toxic, super-effective odor neutralizer for HVAC ducts, proficient at destroying stubborn odors including pet, smoke, and musty smells in residential, industrial and commercial applications. Effective for up to 6 months.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DUCT-FRESH-8	Duct-Fresh Gel – 8 oz.	EA	12
DUCT-FRESH-16	Duct-Fresh Gel – 16 oz.	EA	8
DUCT-FRESH-48	Duct-Fresh Gel – 48 oz.	EA	8

Duct-Fresh Spray

A non-toxic, instantaneous, super-effective odor neutralizer for HVAC ducts. Destroys stubborn pet odors, smoke, and musty smells in residential, industrial and commercial applications. Great for spot-treating malodor problem areas.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DUCT-FRESH-32	Duct-Fresh Spray – 1 Quart	EA	12

PAN TREATMENTS

Flow-Plus™ Condensate Pan Treatment

A unique polymer formula that maintains condensate flow and prevents drain pan overflow. 100% active. No residue—no waste—nonclogging. Effective, long-term condensate activated release. Environmentally safe, non-toxic, and non-corrosive. Also economical with sizes to meet all tonnage requirements.

CATALOG NO.	EQUIPMENT TONNAGE
FLOW-PLUS-25	1/2 to 3 tons
FLOW-PLUS-200	1/2 to 3 tons
FLOW-PLUS-6	3 to 5 tons
FLOW-PLUS-10	5 to 20 tons
FLOW-PLUS-125	20 to 50 tons

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FLOW-PLUS-25	Flow-Plus™ Condensate Pan Treatment – 25 Tabs/Jar	EA	12
FLOW-PLUS-200	Flow-Plus™ Condensate Pan Treatment – 200 Tabs/Jar	EA	4
FLOW-PLUS-6	Flow-Plus™ Condensate Pan Treatment – 6 - 1 oz. Blocks	EA	12
FLOW-PLUS-10	Flow-Plus™ Condensate Pan Treatment – 10 oz. Tubs	EA	18
FLOW-PLUS-125	Flow-Plus™ Condensate Pan Treatment – 1.25 lb. Tubs	EA	8

FLOW-PLUS-200



Pro-Treat® 350 Condensate Drain Pan Treatment

Place a Pro-Treat® 350 tablet in a condensate drain pan and condensed moisture will slowly dissolve the tablet, thinly coating the pan surface to give prolonged cleaning action on sludge. Dosage: one or two tablets are recommended in each pan per month. For industrial use only!

PROTREAT-350



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-350	Pro-Treat® 350 Condensate Pan Treatment – 100 Tablets per Jar	EA	24

Pro-Treat® Pan Strips

Pro-Treat® Pan Strips kill odor causing bacteria and last up to 6 months. Use in the primary drain pan of cooling units such as air conditioners and refrigerators. Pro-Treat® Pan Strips control foul-smelling odors caused by mildew, fungi, bacteria, algae, and slime. For use in hotels, schools, colleges, hospitals, nursing homes, airports, and many other locations.



CATALOG NO.	DESCRIPTION	STRIPS/ PACK	UOM	ORDER MULTIPLE
PS-075	Pro-Treat® Pan Strips – for up to 3/4 Ton	10	EA	12
PS-01	Pro-Treat® Pan Strips – for 1 to 2 Ton	10	EA	12
PS-03	Pro-Treat® Pan Strips – for 3 to 5 Ton	6	EA	24
PS-07	Pro-Treat® Pan Strips – for 7 to 12 Ton	2	EA	24
PS-20	Pro-Treat® Pan Strips – for 20 to 25 Ton	1	EA	24
PS-40	Pro-Treat® Pan Strips – for 40 to 50 Ton	1	EA	12

EPA Registration #6836-254-69966

PAN TREATMENTS/DISINFECTANTS

Pro-Treat® 151 Premium Condensate Drain Pan Treatment

Pro-Treat® 151 premium tablets penetrate and help remove sludge that can plug drain pans and drain lines and foul humidifier pans. Kills odors associated with slime and sludge, minimizing maintenance problems from overflow and water damage caused by fouled pans, plugged traps, or drain lines. Tablets are 100% soluble, easy-to-use, and do not form any deposits in the pan or drain line. Approved for computer rooms. Dosage: 1 tablet per 3 tons each month. PROTREAT-151 is EPA registered.

PROTREAT-151



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-151	Pro-Treat® 151 Premium Drain Pan Treatment – 100 Tablets/Jar	EA	12

Pro-Treat® 152 King-Size Premium Condensate Drain Pan Treatment

Economical, safe, effective king-size tablets last three times longer. Safe, non-corrosive, odor-free and 100% soluble. Computer room approved. Keeps drain pans and condensate lines clean and free flowing. Dosage: 1 tablet per 3 tons per 3 months.

PROTREAT-152



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-152	Pro-Treat® 152 King-Size Premium Drain Pan Treatment – 12 Tablets/Jar	EA	6

PAN TREATMENTS/DISINFECTANTS cont'd

Pro-Treat® 161 Condensate Drain Pan Treatment

Controls odors and eliminates condensate drain pan overflows and the resulting water damage. 100% soluble, easy-to-use, non-corrosive, and non-toxic. Use regularly to assure season-long, trouble-free condensate drain pan performance. Approved for computer rooms. Dosage: 2 tablets per 3 tons each month.

PROTREAT-161



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-161	Pro-Treat® 161 Drain Pan Treatment – 100 Tablets/Jar	EA	12

Pro-Treat® 200 Economy Condensate Drain Pan Treatment

Economical with 200 tablets per jar. Safe, non-corrosive, odor-free and 100% soluble. Approved for computer rooms. Convenient, easy-to-use tablet form provides prolonged cleaning action. Dosage: 3 tablets per 3 tons per month.

PROTREAT-200



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-200	Pro-Treat® 200 Economy Drain Pan Treatment – 200 Tablets/Jar	EA	12

Pro-Treat® 217 Economy Condensate Drain Pan Treatment

Economical with 200 tablets per jar. Safe, non corrosive, odor free and 100% soluble. Approved for computer rooms. Convenient, easy to use tablet form provides prolonged cleaning action. Dosage 3 tablets per 3 tons per month.

PROTREAT-217



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PROTREAT-217	Pro-Treat® 217 Economy Drain Pan Treatment – 200 Tablets/Jar	EA	12

REFRIGERATION OILS

Pro-Lube™ Mineral Oil

Specialty Chemical mineral oil (by Calumet) is a superior mineral naphthenic refrigeration oil designed to meet the operating requirements of modern residential and commercial air conditioning and refrigeration compressors. These oils have a low pour point, low wax floc temperature and are chemically and thermally stable in the presence of refrigerants. OEM approved by Copeland, Carlyle, Trane, and other major compressor manufacturers. Always follow compressor manufacturer's oil viscosity recommendations. Mineral oil is specially recommended for lubrication of compressors containing ammonia, R-11, 12, 13, 22, 113, 114, 123, 500 and 502 refrigerants in residential, industrial and commercial service. DO NOT USE WITH HFC REFRIGERANTS SUCH AS R-134A.

3WF-01



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
3WF-01	SUS150 ISO32 Pro-Lube™ Mineral Oil – 1 Gallon Jug	EA	4
3WF-05	SUS150 ISO32 Pro-Lube™ Mineral Oil – 5 Gallon Pail	EA	1
4WF-01	SUS300 ISO68 Pro-Lube™ Mineral Oil – 1 Gallon Jug	EA	4
4WF-05	SUS300 ISO68 Pro-Lube™ Mineral Oil – 5 Gallon Pail	EA	1

REFRIGERATION OILS cont'd

Pro-Lube-ALK™ Alkylbenzene

Specialty Chemical Alkylbenzene is recommended for refrigeration, air conditioning, and heat pump applications using HCFC and CFC refrigerants. An excellent choice when retrofitting to the new refrigerants which are HCFC based such as R-401A (MP-39), R-401B (MP-66), R-402A (HP-80), R-402B (HP-81). OEM approved by Copeland and other compressor manufacturers.



ALK150-01

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ALK150-01	SUS150 ISO32 Pro-Lube™ Alkylbenzene – 1 Gallon Jug	EA	4
ALK150-05	SUS150 ISO32 Pro-Lube™ Alkylbenzene – 5 Gallon Drum	EA	1
ALK200-01	SUS200 ISO46 Pro-Lube™ Alkylbenzene – 1 Gallon Jug	EA	4
ALK300-01	SUS300 ISO68 Pro-Lube™ Alkylbenzene – 1 Gallon Jug	EA	4
ALK300-05	SUS300 ISO68 Pro-Lube™ Alkylbenzene – 5 Gallon Drum	EA	1

Pro-Lube-POE™ Polyolester

Specialty Chemical POE is custom formulated for use in refrigeration compressors. This series contains no ozone depleting substances and is compatible with new HFC refrigerants as well as existing CFC and HCFC refrigerants. POE is also compatible with traditional mineral oil lubricants.



POE32-32

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
POE32-32	SUS150 ISO32 Pro-Lube-POE™ Polyolester – 1 Quart Can	EA	12
POE32-01	SUS150 ISO32 Pro-Lube-POE™ Polyolester – 1 Gallon Can	EA	6
POE68-32	SUS300 ISO68 Pro-Lube-POE™ Polyolester – 1 Quart Can	EA	12
POE68-01	SUS300 ISO68 Pro-Lube-POE™ Polyolester – 1 Gallon Can	EA	6
POE100-32	SUS500 ISO100 Pro-Lube-POE™ Polyolester – 1 Quart Can	EA	12
POE100-01	SUS500 ISO100 Pro-Lube-POE™ Polyolester – 1 Gallon Can	EA	6

SYSTEM CLEANERS

D'Scale™ Acid Scale Remover for Cooling Towers

D'Scale™ will not create corrosive acidic foam. D'Scale™ has pH indicating dye. The color changes to yellow when acid has been consumed. Each gallon dissolves 3 pounds of scale.



D-SCALE

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D-SCALE	D'Scale™ Acid Scale Remover – 1 Gallon Container	EA	4

TEST KITS, STRIPS, AND PREVENTION

Acid Test Kit™

Detects acid in refrigeration oil. Convenient, one-step test means no chemicals to mix. Easy to evaluate. Color change indicates acidity; color intensity reveals the amount of acid present in the oil sample.



ATK-4

ATK-1

ATK-1P

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ATK-4	Acid Test Kit™, pack of 4	EA	4
ATK-1	Acid Test Kit™	EA	1
ATK-1P	Acid Test Kit™ for POE Oil	EA	1

THREAD SEALANTS

PRO-TITE™ Resin Based Thread Sealant

Resin based thread sealant that adheres to internal surfaces, fills voids while forming a flexible fluid tight seal. Specifically formulated for use on metals and plastics subject to extreme vibration. Serviceable at temperatures from 100°F (73°C) to 400°F (204°C) and from full vacuum to 10,000 PSI. Pro Tite™ is impervious to most chemicals including refrigerants, petroleum products, gases, steam, etc. Alcohol based.

CLL-1



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
CLL-1	Pro-Tite™ Thread Sealant – 1-1/3 oz. Squeeze Tube	EA	12
CLL-4	Pro-Tite™ Thread Sealant – 4 oz. Brush Top	EA	12

VACUUM PUMP OIL

Pro-Lube-VAC™ Vacuum Pump Oil

Specialty Chemical VP-68 Premium Vacuum Pump Oil is now based on a highly refined paraffinic based stock. This new improved formulation is lighter in color and provides better viscosity and oxidation stability than the previous formulation. VP-68 provides excellent cold start performance; formulated to meet minimum moisture content specifications.

VP68-01



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
VP68-32	Pro-Lube-VAC™ Vacuum Pump Oil – 1 Quart Jug	EA	12
VP68-01	Pro-Lube-VAC™ Vacuum Pump Oil – 1 Gallon Jug	EA	4
VP68-05	Pro-Lube-VAC™ Vacuum Pump Oil – 5 Gallon Pail	EA	1

ADDITIVES

Acid Eliminator

Keeps acid away; compatible with all refrigerants and oils. Chemically neutralizes and prevents acids that are formed in air conditioning and refrigeration systems due to refrigerant and refrigeration oil break-down, moisture, and compressor burnout. Easy-to-use, no complicated charts. Works fast, circulates quickly, and leaves no solids or solid residuals. Will not harm system components. Can prevent system breakdown.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
ACID-ELIM	Acid Eliminator – 4 oz. Plastic Bottle	EA	12

Pro-Thaw™ Liquid Dryer for Refrigerants

Chemically dries all refrigerants (R-12, R-22, R-134a, etc.), methyl chloride and methylene chloride. Frees up systems frozen due to moisture contamination in 5 minutes and prevents refreezing. Does not contain any dissolved solids, leaves no residue and works with or without solid dryers.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
PRO-THAW-1	Pro-Thaw™ – 1 oz. Plastic Bottle	EA	24
PRO-THAW	Pro-Thaw™ – 4 oz. Plastic Bottle	EA	12

Glycol Inhibitors

Extend the service life of glycols with Pro-Tek™ Inhibitor. Pro-Tek™ Inhibitor is a glycol corrosion inhibitor additive designed for use in both propylene and ethylene glycol heat transfer/antifreeze solutions. Pro-Tek™ Inhibitor extends the glycol service life by restoring residual alkalinity and neutralization of acids. Pro-Tek™ Inhibitor is both non-toxic and food safe.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
SCM-117-16	Glycol Corrosion Inhibitor Additive – 16 oz.	EA	12

LineSeal™ Refrigerant Line Sealant

LineSeal™ is a patented, contaminate free sealing solution for refrigerant systems. Seals leaks and provides years of protection against future leaks. LineSeal™ is a self-contained vacuum packed canister of sealant that is released into a refrigerant system. The sealant travels with the oil and refrigerant throughout the system. Where the system leaks, the refrigerant escapes and lowers the surrounding air temperature down to the dew point where micro droplets of water are deposited around the perimeter of the leak area. The sealant reacts with the droplets of water to harden into a protective barrier to keep refrigerant from escaping. Unlike many sealant products, LineSeal™ uses no harmful hydrocarbon (propane or butane) chemicals, assuring that the system remains safe and contaminate free.



- Stops existing and future leaks
- Contains no propane or butane
- Patented Technology
- Compatible with all oils and refrigerants

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
LS-1	LineSeal™, 1 ounce can, up to 1.5 ton (18k BTU) (5 kW)	EA	6
LS-2	LineSeal™, 3 ounce can, 1.5 to 5 ton (18-60k BTU) (5-17 kW)	EA	6



Triple-D™

Universal Coil Cleaner™

Triple-D™ is a Universal Coil Cleaner™ suitable for use on condenser and evaporator coils. It is metal safe and does not attack aluminum or copper coil components, extending equipment life and diminishing potential for refrigerant leaks. Triple-D™ is a safer, more versatile product than conventional acid or non-acid coil cleaners.

All of the organic materials in this product are readily biodegradable

BIODEGRADABLE

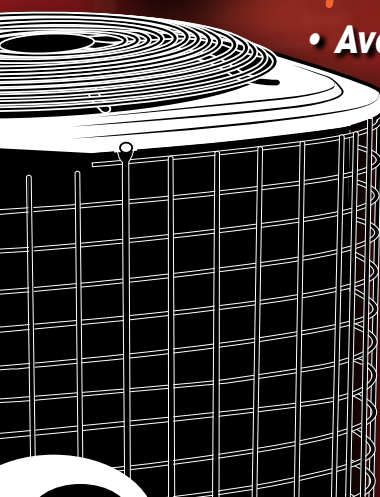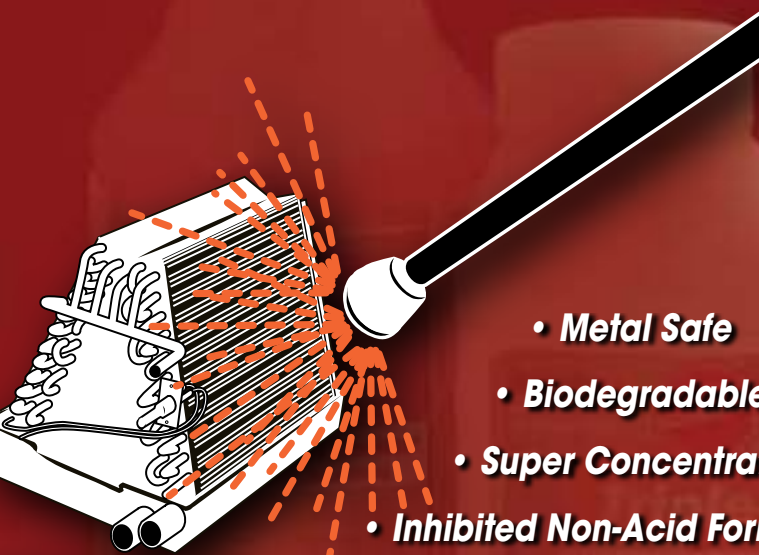

- Metal Safe
- Biodegradable
- Super Concentrated
- Inhibited Non-Acid Formulation
- Available in Multiple Packages/Forms
- Non-Foaming/Non-Toxic
- Safe for Rubber Roofs
- Corrosion Inhibited
- NSF Registered



One product does it all — truly a Universal Coil Cleaner™

INLINE COMPONENTS

Access Fittings	236
Brass Fittings.....	238-240
Copper Fittings	232-235
Cushion Clamps	240
Driers, Sight Glasses	241-242
Line Piercing Valves and Tools	237
Refrigerant Charging.....	242
Refrigerant Labels.....	244
Refrigerant Recovery Products	244
Refrigerant Safety Caps.....	245
Refrigerant Tubing	243
Tubing Insulation	245



COPPER FITTINGS

Male Adapter C x M




CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C101-0050	5/8" x 1/2"	1/2" x 1/2"	EA	25
C101-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C101-0150	1-1/8" x 1"	1" x 1"	EA	10
C101-0222	1-3/8" x 1"	1-1/4" x 1"	EA	10
C101-0295	1-5/8" x 1-1/2"	1-1/2" x 1-1/2"	EA	10

Male Adapter Ftg. x M



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C114-0050	5/8" x 1/2"	1/2" x 1/2"	EA	25
C114-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C114-0150	1-1/8" x 1"	1" x 1"	EA	10
C114-0215	1-3/8" x 1-1/4"	1-1/4" x 1-1/4"	EA	10
C114-0295	1-5/8" x 1-1/2"	1-1/2" x 1-1/2"	EA	50
C114-0390	2-1/8" x 2"	2" x 2"	EA	38

90 Degree Ell C x C



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C235-0002	3/8"	1/4"	EA	25
C235-0025	1/2"	3/8"	EA	25
C235-0050	5/8"	1/2"	EA	25
C235-0090	3/4"	5/8"	EA	25
C235-0100	7/8"	3/4"	EA	25
C235-0150	1-1/8"	1"	EA	10
C235-0215	1-3/8"	1-1/4"	EA	10
C235-0295	1-5/8"	1-1/2"	EA	35

Female Adapter C x F



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C105-0050	5/8" x 1/2"	1/2" x 1/2"	EA	25
C105-0057	5/8" x 3/4"	1/2" x 3/4"	EA	25
C105-0100	7/8" x 3/4"	3/4" x 3/4"	EA	25
C105-0107	7/8" x 1/2"	3/4" x 1/2"	EA	25
C105-0150	1-1/8" x 1"	1" x 1"	EA	10
C105-0159	1-1/8" x 3/4"	1" x 3/4"	EA	10
C105-0215	1-3/8" x 1-1/4"	1-1/4" x 1-1/4"	EA	10
C105-0295	1-5/8" x 1-1/2"	1-1/2" x 1-1/2"	EA	5
C105-0390	2-1/8" x 2"	2" x 2"	EA	30

Female Adapter Ftg. x F



CATALOG NO.	O.D. SIZE	UOM	ORDER MULTIPLE
C115-0050	5/8" x 1/2"	EA	25
C115-0100	7/8" x 3/4"	EA	25
C115-0150	1-1/8" x 1"	EA	10
C115-0215	1-3/8" x 1-1/4"	EA	10
C115-0295	1-5/8" x 1-1/2"	EA	10
C115-0390	2-1/8" x 2"	EA	40

90 Degree Long Turn Street Ell Ftg. x C




CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C272-0002	3/8"	1/4"	EA	25
C272-0025	1/2"	3/8"	EA	25
C272-0050	5/8"	1/2"	EA	25
C272-0090	3/4"	5/8"	EA	25
C272-0100	7/8"	3/4"	EA	10
C272-0150	1-1/8"	1"	EA	10
C272-0215	1-3/8"	1-1/4"	EA	35
C272-0295	1-5/8"	1-1/2"	EA	25

90 Degree Street Ell Ftg. x C


CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C254-0002	3/8"	1/4"	EA	25
C254-0050	5/8"	1/2"	EA	25
C254-0090	3/4"	5/8"	EA	25
C254-0100	7/8"	3/4"	EA	25
C254-0150	1-1/8"	1"	EA	10
C254-0215	1-3/8"	1-1/4"	EA	50
C254-0390	2-1/8"	2"	EA	18

45 Degree Ell C x C


CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C290-0002	3/8"	1/4"	EA	25
C290-0025	1/2"	3/8"	EA	25
C290-0050	5/8"	1/2"	EA	25
C290-0090	3/4"	5/8"	EA	25
C290-0100	7/8"	3/4"	EA	25
C290-0150	1-1/8"	1"	EA	10
C290-0215	1-3/8"	1-1/4"	EA	60
C290-0295	1-5/8"	1-1/2"	EA	40
C290-0390	2-1/8"	2"	EA	18

90 Degree Long Turn Ell C x C


CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C242-0001	1/4"	1/8"	EA	25
C242-0002	3/8"	1/4"	EA	25
C242-0015	5/16"	1/4"	EA	25
C242-0025	1/2"	3/8"	EA	25
C242-0050	5/8"	1/2"	EA	25
C242-0090	3/4"	5/8"	EA	25
C242-0100	7/8"	3/4"	EA	10
C242-0150	1-1/8"	1"	EA	10
C242-0215	1-3/8"	1-1/4"	EA	35
C242-0295	1-5/8"	1-1/2"	EA	25
C242-0390	2-1/8"	2"	EA	12

45 Degree Street Ell Ftg. x C


CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C295-0002	3/8"	1/4"	EA	25
C295-0025	1/2"	3/8"	EA	25
C295-0050	5/8"	1/2"	EA	25
C295-0090	3/4"	5/8"	EA	25
C295-0100	7/8"	3/4"	EA	25
C295-0150	1-1/8"	1"	EA	10
C295-0215	1-3/8"	1-1/4"	EA	60
C295-0295	1-5/8"	1-1/2"	EA	40
C295-0390	2-1/8"	2"	EA	18

Coupling (Socket) with Rolled Tube Stop C x C


CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C165-0001	1/4"	1/8"	EA	25
C165-0002	3/8"	1/4"	EA	25
C165-0025	1/2"	3/8"	EA	25
C165-0050	5/8"	1/2"	EA	25
C165-0090	3/4"	5/8"	EA	25
C165-0100	7/8"	3/4"	EA	25
C165-0150	1-1/8"	1"	EA	10
C165-0215	1-3/8"	1-1/4"	EA	10
C165-0295	1-5/8"	1-1/2"	EA	60
C165-0390	2-1/8"	2"	EA	40

COPPER FITTINGS cont'd

Fitting Reducer Coupling Fig. x C



C410-0093

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C410-0007	3/8" x 1/4"	1/4" x 1/8"	EA	25
C410-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C410-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C410-0059	5/8" x 3/8"	1/2" x 1/4"	EA	25
C410-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C410-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C410-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C410-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C410-1498	1-1/8" x 3/4"	1" x 5/8"	EA	10
C410-0160	1-1/8" x 5/8"	1" x 1/2"	EA	10
C410-0161	1-1/8" x 1/2"	1" x 3/8"	EA	10
C410-0222	1-3/8" x 1-1/8"	1-1/4" x 1"	EA	10
C410-0223	1-3/8" x 7/8"	1-1/4" x 3/4"	EA	10
C410-0224	1-3/8" x 5/8"	1-1/4" x 1/2"	EA	10
C410-0305	1-5/8" x 7/8"	1-1/2" x 3/4"	EA	10
C410-0306	1-5/8" x 5/8"	1-1/2" x 1/2"	EA	10
C410-0398	2-1/8" x 1-5/8"	2" x 1-1/2"	EA	50
C410-0400	2-1/8" x 1-1/8"	2" x 1"	EA	50
C410-0401	2-1/8" x 7/8"	2" x 3/4"	EA	50

Reducer Coupling w/Stop C x C



C165-0223

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C165-0007	3/8" x 1/4"	1/4" x 1/8"	EA	25
C165-0032	1/2" x 3/8"	3/8" x 1/4"	EA	25
C165-0058	5/8" x 1/2"	1/2" x 3/8"	EA	25
C165-0093	3/4" x 5/8"	5/8" x 1/2"	EA	25
C165-0094	3/4" x 1/2"	5/8" x 3/8"	EA	25
C165-0107	7/8" x 5/8"	3/4" x 1/2"	EA	25
C165-0149	7/8" x 3/4"	3/4" x 5/8"	EA	25
C165-0159	1-1/8" x 7/8"	1" x 3/4"	EA	10
C165-1498	1-1/8" x 3/4"	1" x 5/8"	EA	10
C165-0222	1-3/8" x 1-1/8"	1-1/4" x 1"	EA	10
C165-0223	1-3/8" x 7/8"	1-1/4" x 3/4"	EA	10
C165-0224	1-3/8" x 5/8"	1-1/4" x 1/2"	EA	10
C165-0304	1-5/8" x 1-1/8"	1-1/2" x 1"	EA	10
C165-0305	1-5/8" x 7/8"	1-1/2" x 3/4"	EA	10
C165-0306	1-5/8" x 5/8"	1-1/2" x 1/2"	EA	10
C165-0398	2-1/8" x 1-5/8"	2" x 1-1/2"	EA	50
C165-0399	2-1/8" x 1-3/8"	2" x 1-1/4"	EA	50
C165-0400	2-1/8" x 1-1/8"	2" x 1"	EA	50
C165-0401	2-1/8" x 7/8"	2" x 3/4"	EA	50
C165-0402	2-1/8" x 3/4"	2" x 5/8"	EA	50

Cap



C154-0090

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C154-0002	3/8"	1/4"	EA	25
C154-0050	5/8"	1/2"	EA	25
C154-0090	3/4"	5/8"	EA	25
C154-0100	7/8"	3/4"	EA	25
C154-0215	1-3/8"	1-1/4"	EA	10
C154-0295	1-5/8"	1-1/2"	EA	5


Union C x Brass



C657-0100

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C657-0100	7/8"	3/4"	EA	100


Flush Bushing



C142-0058

CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C142-0058	5/8" x 1/4"	1/2" x 1/4"	EA	25

U-Type Strap



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C947-0025	1/2"	3/8"	EA	25
C947-0050	5/8"	1/2"	EA	25
C947-0090	3/4"	5/8"	EA	25
C947-0100	7/8"	3/4"	EA	25
C947-0150	1-1/8"	1"	EA	25
C947-0215	1-3/8"	1-1/4"	EA	100
C947-0295	1-5/8"	1-1/2"	EA	100
C947-0390	2-1/8"	2"	EA	50

Copper Coupling with No Stop



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C172-0050	5/8"	1/2"	EA	25
C172-0090	3/4"	5/8"	EA	25
C172-0100	7/8"	3/4"	EA	25
C172-0150	1-1/8"	1"	EA	10
C172-0215	1-3/8"	1-1/4"	EA	10

Copper Coupling w/Dimple Stop



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C170-0003	5/16"	1/4"	EA	25

P-Traps



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C533-0050	5/8"	1/2"	EA	5
C533-0150	1-1/8"	1"	EA	3
C533-0215	1-3/8"	1-1/4"	EA	2
C533-0295	1-5/8"	1-1/2"	EA	2
C533-0390	2-1/8"	2"	EA	1

Tee C x C x C



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C460-0002	3/8"	1/4"	EA	25
C460-0025	1/2"	3/8"	EA	25
C460-0050	5/8"	1/2"	EA	25
C460-0090	3/4"	5/8"	EA	25
C460-0100	7/8"	3/4"	EA	10
C460-0150	1-1/8"	1"	EA	10
C460-0215	1-3/8"	1-1/4"	EA	35
C460-0295	1-5/8"	1-1/2"	EA	20
C460-0390	2-1/8"	2"	EA	10

Reducing Tee C x C x C



CATALOG NO.	O.D. SIZE	I.D. SIZE	UOM	ORDER MULTIPLE
C460-0058	5/8" x 5/8" x 1/2"	1/2" x 1/2" x 3/8"	EA	25
C460-0107	7/8" x 7/8" x 5/8"	3/4" x 3/4" x 1/2"	EA	10
C460-0117	7/8" x 5/8" x 7/8"	3/4" x 1/2" x 3/4"	EA	10
C460-0118	7/8" x 5/8" x 5/8"	5/8" x 1/2" x 1/2"	EA	10
C460-0159	1-1/8" x 1-1/8" x 7/8"	1" x 1" x 3/4"	EA	10
C460-0160	1-1/8" x 1-1/8" x 5/8"	1" x 1" x 1/2"	EA	10
C460-0181	1-1/8" x 5/8" x 7/8"	1" x 1/2" x 3/4"	EA	10
C460-0182	1-1/8" x 5/8" x 5/8"	1" x 1/2" x 1/2"	EA	10
C460-0222	1-3/8" x 1-3/8" x 1-1/8"	1-1/4" x 1-1/4" x 1"	EA	40
C460-0223	1-3/8" x 1-3/8" x 7/8"	1-1/4" x 1-1/4" x 3/4"	EA	50
C460-0235	1-3/8" x 1-1/8" x 1-1/8"	1-1/4" x 1" x 1"	EA	50
C460-0236	1-3/8" x 1-1/8" x 7/8"	1-1/4" x 1" x 3/4"	EA	50
C460-0237	1-3/8" x 1-1/8" x 5/8"	1-1/4" x 1" x 3/4"	EA	50
C460-0245	1-3/8" x 7/8" x 1-3/8"	1-1/4" x 5/8" x 1-1/4"	EA	35
C460-0247	1-3/8" x 7/8" x 7/8"	1-1/4" x 5/8" x 5/8"	EA	50
C460-0248	1-3/8" x 7/8" x 5/8"	1-1/4" x 5/8" x 1/2"	EA	50
C460-0256	1-3/8" x 5/8" x 1-3/8"	1-1/4" x 1/2" x 1-1/4"	EA	35
C460-0303	1-5/8" x 1-5/8" x 1-3/8"	1-1/2" x 1-1/2" x 1-1/4"	EA	25
C460-0304	1-5/8" x 1-5/8" x 1-1/8"	1-1/2" x 1-1/2" x 1"	EA	30
C460-0305	1-5/8" x 1-5/8" x 7/8"	1-1/2" x 1-1/2" x 3/4"	EA	35
C460-0315	1-5/8" x 1-3/8" x 1-5/8"	1-1/2" x 1-1/4" x 1-1/2"	EA	20
C460-0317	1-5/8" x 1-3/8" x 1-1/8"	1-1/2" x 1-1/4" x 1"	EA	30
C460-0318	1-5/8" x 1-3/8" x 7/8"	1-1/2" x 1-1/4" x 3/4"	EA	40
C460-0319	1-5/8" x 1-3/8" x 5/8"	1-1/2" x 1-1/4" x 1/2"	EA	40
C460-0329	1-5/8" x 1-1/8" x 1-3/8"	1-1/2" x 1" x 1-1/4"	EA	30
C460-0330	1-5/8" x 1-1/8" x 1-1/8"	1-1/2" x 1" x 1"	EA	35
C460-0331	1-5/8" x 1-1/8" x 7/8"	1-1/2" x 1" x 5/8"	EA	5
C460-0332	1-5/8" x 1-1/8" x 5/8"	1-1/2" x 1" x 1/2"	EA	40
C460-0339	1-5/8" x 7/8" x 1-5/8"	1-1/2" x 5/8" x 1-1/2"	EA	20
C460-0340	1-5/8" x 7/8" x 1-3/8"	1-1/2" x 5/8" x 1-1/4"	EA	30
C460-0341	1-5/8" x 7/8" x 1-1/8"	1-1/2" x 5/8" x 1"	EA	40
C460-0342	1-5/8" x 7/8" x 7/8"	1-1/2" x 5/8" x 5/8"	EA	40
C460-0343	1-5/8" x 7/8" x 5/8"	1-1/2" x 5/8" x 1/2"	EA	40
C460-0398	2-1/8" x 2-1/8" x 1-5/8"	2" x 2" x 1-1/2"	EA	10
C460-0399	2-1/8" x 2-1/8" x 1-3/8"	2" x 2" x 1-1/4"	EA	15
C460-0400	2-1/8" x 2-1/8" x 1-1/8"	2" x 2" x 1"	EA	18
C460-0401	2-1/8" x 2-1/8" x 7/8"	2" x 2" x 5/8"	EA	20
C460-0402	2-1/8" x 2-1/8" x 5/8"	2" x 2" x 3/8"	EA	20
C460-0413	2-1/8" x 1-5/8" x 2-1/8"	2" x 1-1/2" x 2"	EA	10
C460-0414	2-1/8" x 1-5/8" x 1-5/8"	2" x 1-1/2" x 1-1/2"	EA	10
C460-0415	2-1/8" x 1-5/8" x 1-3/8"	2" x 1-1/2" x 1-1/4"	EA	10
C460-0416	2-1/8" x 1-5/8" x 1-1/8"	2" x 1-1/2" x 1"	EA	10
C460-0417	2-1/8" x 1-5/8" x 7/8"	2" x 1-1/2" x 3/4"	EA	20
C460-0418	2-1/8" x 1-5/8" x 5/8"	2" x 1-1/2" x 1/2"	EA	20
C460-0429	2-1/8" x 1-3/8" x 2-1/8"	2" x 1-1/4" x 2"	EA	10
C460-0430	2-1/8" x 1-3/8" x 1-5/8"	2" x 1-1/4" x 1-1/2"	EA	15
C460-0431	2-1/8" x 1-3/8" x 1-3/8"	2" x 1-1/4" x 1-1/4"	EA	15
C460-0432	2-1/8" x 1-3/8" x 1-1/8"	2" x 1-1/4" x 1"	EA	20
C460-0433	2-1/8" x 1-3/8" x 7/8"	2" x 1-1/4" x 3/4"	EA	20
C460-0444	2-1/8" x 1-1/8" x 2-1/8"	2" x 1" x 2"	EA	15
C460-0447	2-1/8" x 1-1/8" x 1-1/8"	2" x 1" x 1"	EA	20
C460-0457	2-1/8" x 7/8" x 2-1/8"	2" x 5/8" x 2"	EA	10
C460-0470	2-1/8" x 5/8" x 2-1/8"	2" x 1/2" x 2"	EA	15

ACCESS FITTINGS

A convenient low-cost port for refrigeration servicing. May be installed in any position on either high or low side for charging, purging, quick testing or pressure checking. DiversiTech's access fittings have 1/4" SAE male flare access ports and include a quick seal cap and a stainless and brass special refrigerant valve core.

CATALOG NO.	DESCRIPTION	CONNECTION	UOM	ORDER MULTIPLE
VA-3-346	3 Way Solder Type, pack of 6	For 3/16" O.D. tube or 1/4" and 3/8" solder fitting	PK	1
VA-34	Straight Solder Type, pack of 6	3/16" O.D.S. x 1/4" O.D.F.	PK	1
VA-46	Straight Solder Type, pack of 6	1/4" O.D.S. x 3/8" O.D.F.	PK	1
VA-68	Straight Solder Type, pack of 6	3/8" O.D.S. x 1/2" O.D.F.	PK	1
VAU-24	Half Union, pack of 6	1/8" MPT	PK	1
VAU-45	Half Union, pack of 6	1/4" MPT	PK	1
VAX-2	Extended Copper Tube	1/8" O.D. tube	PK	1
VAX-3	Extended Copper Tube	3/16" O.D. x 1/8" I.D.	PK	1
VAX-4	Extended Copper Tube	1/4" O.D. x 3/16" I.D.	PK	1
VAX-5	Extended Copper Tube	5/16" O.D. x 1/4" I.D.	PK	1
VAX-6	Extended Copper Tube	3/8" O.D. x 5/16" I.D.	PK	1
VAX-8	Extended Copper Tube	1/2" O.D.	PK	1
VE-2	Threaded Elbow, pack of 3	1/8" MPT	PK	1
VS-4	Swivel Nut w/Depressor, pack of 6	1/4" female flare forged swivel nut	PK	1
VST-4	Swivel Tee w/Permanent Depressor, pack of 3	1/4" Access on run x 1/4" female flare w/depressor on female swivel branch end	PK	1
VST-44	Swivel Tee w/Permanent Depressor, pack of 3	1/4" Access on run x 1/4" access on "T" - female swivel on run	PK	1
VT-4	Forged Brass Tee, pack of 3	1/4" Access all ends with 2 flare nuts, 1 core and cap	PK	1
VT-24	Threaded Tee, pack of 3	1/8" MPT on branch, 1/4" flare x 1/4" flare access on run	PK	1
VTR-24	Threaded Tee, pack of 3	1/8" MPT x 1/4" male flare on run x access on branch	PK	1
VTS-10	Solder Tee Type	5/8" O.D. tube	EA	1
VTS-12	Solder Tee Type	3/4" O.D. tube	EA	1
VTS-14	Solder Tee Type	7/8" O.D. tube	EA	1
VTS-18	Solder Tee Type	1-1/8" O.D. tube	EA	1
VTS-46	Solder Tee Type, pack of 3	1/4" O.D.S. x 5/16" O.D.F.	PK	1
VTS-56	Solder Tee Type, pack of 3	5/16" O.D.S. x 3/8" O.D.F.	PK	1
VTS-68	Solder Tee Type, pack of 3	3/8" O.D.S.	PK	1
VTS-810	Solder Tee Type, pack of 3	1/2" O.D.S.	PK	1
VTS-3-10	Solder Tube Elbow	5/8" O.D.S.	EA	1
VTS-3-12	Solder Tube Elbow	3/4" O.D.S.	EA	1
VTS-3-14	Solder Tube Elbow	7/8" O.D.S.	EA	1
VTS-3-18	Solder Tube Elbow	1-1/8" O.D.S.	EA	1
VC-4	Flare Cap, pack of 12	1/4"	PK	1
VC-4R	Flare Cap w/Core Remover, pack of 12	1/4"	PK	1
VVC-1	Valve Core, pack of 6		PK	1



Brass Adapters

The MSA-45 is used on the new R410 Mini Split systems that have the larger unique fitting on the service valve. The description of that fitting is 1/2" acme Male-20 UN. This adapter will screw onto the 1/2" Acme Male-20 UN fitting and allow you to connect a standard 1/4 service hose to it.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
MSA-45	1/4" Male flare x 1/2" - 20 UNF Female	EA	1
MSA-44	1/4" Female flare swivel w/depressor tip and seal x 1/4" MPT, pack of 2	PK	1
MSA-4545	45° 1/4" Male flare x 1/2" - 20 UNF Female	EA	1

Cop-Cap™ Locking Valve Cover

An effective way to discourage and prevent the removal of refrigerant. COP-CAP™ fits this standard service valve on all central AC units and mini-splits. It helps prevent access by unauthorized persons and can only be removed with the included special tool. Simply thread COP-CAP™ assembly onto existing 1/4" flare connection on system and lock set screw in place with hex wrench provided.



- Seals service valve to prevent leaks
- Prevents illegal venting or theft of refrigerant
- Stops unauthorized access in unsecured areas

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
VCC-4	Cop-Cap™, Pack of 2	PK	1
VCC-4B	Cop-Cap™ bulk, 100 per case	EA	100

Quick-Tap

Features a valve core in the 1/4" male port. Simply pierce the line and back seat the needle. Flow starts when depressor type charging hose is connected. Flow shuts off automatically when hose is removed. If valve core is not desired, it may be removed. Connect hose, pierce line and back seat needle. This method offers full unrestricted flow. Valve core can be removed or changed at any time without loss of refrigerant if needle is front seated.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
QT-1	Quick-Tap – 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-2	Quick-Tap – 1/2", 5/8" O.D. Tube Size	EA	1

MAC—The Ultimate in Line Piercing Valves

Install valve. Connect charging hose. Service. That's all there is to it! MAC features uniport: 1 connection for piercing and servicing. Sealed with refrigerant resistant "O" rings. Needle automatically back seats after servicing, leaving line free of restriction. Connect to tubing with 2 socket-head screws. (Hex wrench is included with each valve.) Needle depressor is inserted into head of needle. Wing cap is turned down easily by hand until line is pierced. Wing cap is removed and system may be serviced with any charging hose with built-in depressor. When hose is removed, spring loaded needle back-seats forming a leak proof seal. Needle depressor is discarded and wing cap forms extra precautionary seal.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
QTM-1	MAC Line Piercing Valve – 1/4", 5/16", 3/8" O.D. Tube Size	EA	36
QTM-2	MAC Line Piercing Valve – 1/2", 5/8" O.D. Tube Size	EA	36
QTM-3	MAC Line Piercing Valve – 3/16", 1/4" O.D. Tube Size	EA	36

Copper Saddle Valve

For copper-to-copper brazing. Penetrates line in one easy operation with no holes to drill. Steel pin with valve core pierces line and is locked into valve body by tightening cap. Teflon ring assures positive seal. Available in sizes from 1/4" to 1-1/8".



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
VLC-4	Copper Saddle Valve – 1/4" O.D. Tube Size, pack of 6	PK	1
VLC-5	Copper Saddle Valve – 5/16" O.D. Tube Size, pack of 6	PK	1
VLC-6	Copper Saddle Valve – 3/8" O.D. Tube Size, pack of 6	PK	1
VLC-8	Copper Saddle Valve – 1/2" O.D. Tube Size, pack of 4	PK	1
VLC-10	Copper Saddle Valve – 5/8" O.D. Tube Size, pack of 3	PK	1
VLC-12	Copper Saddle Valve – 3/4" O.D. Tube Size, pack of 2	PK	1
VLC-18	Copper Saddle Valve – 1-1/8" O.D. Tube Size, pack of 2	PK	1
VLC-25	Additional Teflon Rings, pack of 25	PK	1

Quick-Tap-2

Identical to Quick-Tap except that a nylon handle replaces the hex wrench. Phillips-head screws are used.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
QTH-1	Quick-Tap-2 – 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QTH-2	Quick-Tap-2 – 1/2", 5/8" O.D. Tube Size	EA	1

Insta-Tap Refrigerant Recovery Tool

The fastest, easiest way to evacuate refrigerant before disposal of a unit. Snaps onto refrigerant line for full and immediate flow. Punctures super large hole for maximum full flow discharge to recovery unit. One tool fits all sizes from 3/16" to 7/8" O.D. hard tubing. Replaceable needle.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
QT-100	Quick-Tap-2 – 1/4", 5/16", 3/8" O.D. Tube Size	EA	1
QT-100N	Replaceable Hardened Steel Needle and Gasket	EA	1
QT-100G	Replacement Gasket Only	EA	3

Core Storer

All steel valve core remover and storage container. Completely knurled for easier grip, eliminating slippage when using with oily or greasy hands. Core Storer features a compartment for storing extra valve cores. Four replacement cores are included with each tool.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
VCR-1	Core Remover and Storer	EA	1

Core Removal Tool

Designed to remove and replace valve cores without losing the refrigerant charge. Connects to any 1/4" male flare fitting. Saves time, saves refrigerant.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
VCRT-1	Core Removal Tool	EA	1
VCRT-1R	Replacement Rod Assembly	EA	1
VCRT-1RK	Replacement O-ring Kit	EA	1
VCRT-1S	Replacement Shut-off Stem	EA	1

BRASS FITTINGS

Compression Sleeve



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D60A-4	1/4" Compression Sleeve	EA	100
D60A-8	1/2" Compression Sleeve	EA	100
D60A-10	5/8" Compression Sleeve	EA	100

Compression Nut



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D61A-4	1/4" Compression Nut	EA	10
D61A-8	1/2" Compression Nut	EA	10
D61A-10	5/8" Compression Nut	EA	10

Compression Union



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D62A-44	1/4" Compression Union	EA	10
D62A-66	3/8" Compression Union	EA	10
D62A-88	1/2" Compression Union	EA	10
D62A-1010	5/8" Compression Union	EA	10

Flare x MIP Elbow



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DE1-4B	1/4" Flare x 1/4" MIP Elbow	EA	10
DE1-6C	3/8" Flare x 3/8" MIP Elbow	EA	10
DE1-8D	1/2" Flare x 1/2" MIP Elbow	EA	10
DE1-12E	3/4" Flare x 3/4" MIP Elbow	EA	10

Compression Connector



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D68A-4B	1/4" x 1/4" Compression Connector	EA	10
D68A-6C	3/8" x 3/8" Compression Connector	EA	10
D68A-8D	1/2" x 1/2" Compression Connector	EA	10
D68A-6B	3/8" x 1/4" Compression Connector	EA	10
D68A-6D	3/8" x 1/2" Compression Connector	EA	10

Compression Elbow



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D69A-4A	1/4" x 1/8" Compression Elbow	EA	10
D69A-4B	1/4" x 1/4" Compression Elbow	EA	10
D69A-6B	3/8" x 1/4" Compression Elbow	EA	10
D69A-6C	3/8" x 3/8" Compression Elbow	EA	10
D69A-6D	3/8" x 1/2" Compression Elbow	EA	10
D69A-8D	1/2" x 1/2" Compression Elbow	EA	10

Compression Tee



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
D64A-44	1/4" Compression Tee	EA	10
D64A-66	3/8" Compression Tee	EA	10
D64A-88	1/2" Compression Tee	EA	10
D64A-1010	5/8" Compression Tee	EA	10

Flare x MIP Reducing Elbow



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DE1-6B	3/8" Flare x 1/4" MIP Reducing Elbow	EA	10
DE1-6D	3/8" Flare x 1/2" MIP Reducing Elbow	EA	10
DE1-8E	1/2" Flare x 3/4" MIP Reducing Elbow	EA	10
DE1-10D	5/8" Flare x 1/2" MIP Reducing Elbow	EA	10

Short Nut

DN1-6



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DN1-3	3/16" Short Nut	EA	10
DN1-4	1/4" Short Nut	EA	10
DN1-6	3/8" Short Nut	EA	10
DN1-10	5/8" Short Nut	EA	10
DN1-12	3/4" Short Nut	EA	10
DN1-14	7/8" Short Nut	EA	5

Cap

DN5-4



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DN5-4	1/4" Cap	EA	10
DN5-6	3/8" Cap	EA	10

Short Forged Flare Nut

DNS4-10



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DNS4-4	1/4" Short Forged Flare Nut	EA	10
DNS4-6	3/8" Short Forged Flare Nut	EA	10
DNS4-8	1/2" Short Forged Flare Nut	EA	10
DNS4-10	5/8" Short Forged Flare Nut	EA	10
DNS4-12	3/4" Short Forged Flare Nut	EA	10
DNS4-14	7/8" Short Forged Flare Nut	EA	5

Plug

DP2-6



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DP2-4	1/4" Plug	EA	10
DP2-6	3/8" Plug	EA	10
DP2-8	1/2" Plug	EA	10
DP2-10	5/8" Plug	EA	10

Flare Tee

DT2-4



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DT2-4	1/4" Flare Tee	EA	10
DT2-6	3/8" Flare Tee	EA	10
DT2-8	1/2" Flare Tee	EA	10
DT2-10	5/8" Flare Tee	EA	5

Flare x MIP Union


DU1-6B



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DU1-4A	1/4" Flare x 1/8" MIP Union	EA	10
DU1-4B	1/4" Flare x 1/4" MIP Union	EA	10
DU1-6B	3/8" Flare x 1/4" MIP Union	EA	10
DU1-6C	3/8" Flare x 3/8" MIP Union	EA	10
DU1-6D	3/8" Flare x 1/2" MIP Union	EA	10
DU1-6E	3/8" Flare x 3/4" MIP Union	EA	10
DU1-8B	1/2" Flare x 1/4" MIP Union	EA	10
DU1-8D	1/2" Flare x 1/2" MIP Union	EA	10
DU1-8E	1/2" Flare x 3/4" MIP Union	EA	10
DU1-10D	5/8" Flare x 1/2" MIP Union	EA	10
DU1-10E	5/8" Flare x 3/4" MIP Union	EA	10
DU1-12D	3/4" Flare x 1/2" MIP Union	EA	10

Flare Union

DU2-6



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DU2-4	1/4" Flare Union	EA	10
DU2-6	3/8" Flare Union	EA	10
DU2-8	1/2" Flare Union	EA	10
DU2-10	5/8" Flare Union	EA	10
DU2-12	3/4" Flare Union	EA	10
DU2-14	7/8" Flare Union	EA	5

BRASS FITTINGS cont'd

Flare x FIP Union



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DU3-6C	3/8" x 3/8" Flare x FIP Union	EA	10
DU3-6D	3/8" x 1/2" Flare x FIP Union	EA	10
DU3-8D	1/2" x 1/2" Flare x FIP Union	EA	10
DU3-10D	5/8" x 1/2" Flare x FIP Union	EA	10
DU3-10E	5/8" x 3/4" Flare x FIP Union	EA	10

Flare x Flare Swivel Union




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
DUS4-4	1/4" Flare x 1/4" Flare Swivel Union	EA	10
DUS4-6	3/8" Flare x 3/8" Flare Swivel Union	EA	10
DUS4-8	1/2" Flare x 1/2" Flare Swivel Union	EA	10

CUSHION CLAMPS

Cushion Clamps

An industry standard universal clamp that mounts to standard strut. Steel with electro-dichromate finish to resist corrosion. The lock nut has a nylon insert for a positive lock. The polymeric grommet withstands temperatures from -25°C to 125°C and resists the effects of most oils, chemicals, and industrial cleaning compounds.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
538-1/4	Cushion Clamp – 1/4"	EA	25
538-3/8	Cushion Clamp – 3/8"	EA	25
538-1/2	Cushion Clamp – 1/2"	EA	25
538-5/8	Cushion Clamp – 5/8"	EA	25
538-3/4	Cushion Clamp – 3/4"	EA	25
538-7/8	Cushion Clamp – 7/8"	EA	25
538-1-1/8	Cushion Clamp – 1-1/8"	EA	10
538-1-3/8	Cushion Clamp – 1-3/8"	EA	10
538-1-5/8	Cushion Clamp – 1-5/8"	EA	10
538-2-1/8	Cushion Clamp – 2-1/8"	EA	10
538-2-5/8	Cushion Clamp – 2-5/8"	EA	10
538-3-1/8	Cushion Clamp – 3-1/8"	EA	10
538-3-5/8	Cushion Clamp – 3-5/8"	EA	10
538-4-1/8	Cushion Clamp – 4-1/8"	EA	10

Liquid Line Driers

High moisture and acid capacity. Maximum filtration capacity. Exceptional compatibility with new polyester oils. Compatible with all existing and new refrigerants and blends including 134a, 401A/B, 402A/B, 404A, 407A/B/C, 410A, 502, 507A. Spring loaded, molecular sieve and activated alumina. Solid copper sweat fittings. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion. Eliminates concern of additive stripping.



DAD052

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE
DAD032	WLD-032 FLARE	1/4	3	EA	1
DAD032S	WLD-032 SWEAT	1/4	3	EA	1
DAD052	WLD-052 FLARE	1/4	5	EA	1
DAD052S	WLD-052 SWEAT	1/4	5	EA	1
DAD053S	WLD-053 SWEAT	3/8	5	EA	1
DAD082	WLD-082 FLARE	1/4	8	EA	1
DAD082S	WLD-082 SWEAT	1/4	8	EA	1
DAD083S	WLD-083 SWEAT	3/8	8	EA	1
DAD084S	WLD-084 SWEAT	1/2	8	EA	1
DAD163	WLD-163 FLARE	3/8	16	EA	1
DAD163S	WLD-163 SWEAT	3/8	16	EA	1
DAD164S	WLD-164 SWEAT	1/2	16	EA	1
DAD303	WLD-303 FLARE	3/8	30	EA	1
DAD303S	WLD-303 SWEAT	3/8	30	EA	1
DAD304S	WLD-304 SWEAT	1/2	30	EA	1
DAD305	WLD-305 FLARE	5/8	30	EA	1
DAD305S	WLD-305 SWEAT	5/8	30	EA	1

Suction Line Driers

The solid-core clean-up dryer was developed for use in a system suction line. The compact design incorporates a large outside diameter shell, which results in a shorter lay-in length, and a larger core, which provides a greater filtration area for maximum operating efficiency. The core material has controlled porosity which effectively removes and holds a maximum amount of contaminants with a minimum of pressure drop. It collects and holds inorganic acids and other harmful contaminants from a motor burnout. This binding process protects the core from acid decomposition. Access valves on both the inlet and outlet sides make it easy to measure pressure accurately. Occasionally, enough contaminant matter may collect in the filter core to cause a slight pressure drop. The access valves on the SLD make it easy to determine if a pressure drop exists and to measure the amount of the drop. The original DSLD, solid core, activated alumina suction line filter dryer. High acid capacity. Low pressure drop – exceptionally high flow rates. Designed for system clean-up. 500 hours salt spray protection. Shortest system cut-out lengths allow installation in tight areas. Two access valves simplify pressure drop measurement. Flare or solid copper sweat fittings.



DSS-SLD306SV

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE
DSL13-5SVHH	AL-24-55C Sweat	5/8	13	EA	1
DSL13-6SVHH	AL-30-6SC Sweat	3/4	13	EA	1
DSL27-7SVHH	AL-30-7SC Sweat	7/8	27	EA	1
DSL27-9SVHH	AL-44-9SC Sweat	1-1/8	27	EA	1
DSL54-11SVHH	AL-75-11SC Sweat	1-3/8	54	EA	1
DSS-SLD306SV	VSD-6 & S Sweat	3/4	30	EA	1
DSS-SLD307SV	VSD-7 & S Sweat	7/8	30	EA	1

Universal Spun Copper Driers

Manufactured with the latest generation molecular sieves compatible with more than 20 different types of refrigerants, including R-134A. They can be used in all hermetic and open refrigeration systems using CFC, HCFC and HFC gases and mixes such as commercial and domestic refrigerators, freezers and air conditioners ranging from 1/8 to 2.0 HP. Hermetically sealed with extended ends.

CATALOG NO.	OUTLET	INLET	DIAMETER	LENGTH GRAMS	DESSICANT R12	RECOMM. R22	TONNAGE QUANTITY	UOM	ORDER MULTIPLE
DX-3	1/4"	1/4"	3/4"	7-11/16"	10	1/3	1/2	EA	24
DX-4	Multiple	1/4"	1"	9"	18	3/4	1-1/2	EA	1
DXA-5	1/4"	1/4"	1"	9-1/4"	20	3/4	1-1/2	EA	1



DX-3

DX-4

DXA-5

DRIERS, SIGHT GLASSES cont'd

Bi Flow Driers

The "DBF" Series is designed specifically for heat pump or reverse cycle application. External check valves are not required since they are incorporated within the filter dryer shell. The core design filters out contaminant particles down to 25 microns. 100% copper sweat or nickel plated flare fittings. Desiccant core provides reliable and effective, removal of solid contaminants, acid and moisture. Provides three times the filtration as the standard bi-flow. Core is cushioned in fiber gaskets to protect core and to insure trouble-free performance. Powder paint exterior coating surpasses 500 hour ASTM salt spray test and resists corrosion.



DBF163S

CATALOG NO.	VIRGINIA KMP	CONNECTION	CUBIC INCH	UOM	ORDER MULTIPLE
DBF083	V2A-083 Flare	3/8	8	EA	1
DBF083S	V2A-083 Sweat	3/8	8	EA	1
DBF084	V2A-084 Flare	1/2	8	EA	1
DBF084S	V2A-084 Sweat	1/2	8	EA	1
DBF163	V2A-163 Flare	3/8	16	EA	1
DBF163S	V2A-163 Sweat	3/8	16	EA	1
DBF164S	V2A-164 Sweat	1/2	16	EA	1
DBF165S	V2A-165S Sweat	5/8	16	EA	1

Sight Glasses

Sight Glass and Moisture Indicator provides a quick visual diagnosis of refrigerant and moisture levels within a system. The sight glass indicates if the system has the proper refrigerant level, a restricted dryer or excessive pressure-drop. The moisture indicator recognizes moisture within the system. Provides early warning that a potential failure exists resulting in corrosion, chemical damage, restricted flow, or even compressor failure. Etch-resistant glass with a simple color comparison provides easy viewing and quick diagnostics. Flare models feature forged brass body and fittings for corrosion resistance. Sweat models feature copper fittings to permit solder installation without disassembly. Leak-proof design is compact and short in length to easily fit within a unit and provide accuracy in performance.



DPSG-2

CATALOG NO.	VIRGINIA KMP	DESCRIPTION	CONNECTION	UOM	ORDER MULTIPLE
DPSG-2	LDE-2	FLARE	1/4	EA	1
DPSG-3	LDE-3	FLARE	3/8	EA	1
DPSG-4	LDE-4	FLARE	1/2	EA	1
DPSG-5	LDE-5	FLARE	5/8	EA	1
DPSG-2MF	LDE-2-MF	MALE/FEMALE	1/4	EA	1
DPSG-3MF	LDE-3-MF	MALE/FEMALE	3/8	EA	1
DPSG-4MF	LDE-4-MF	MALE/FEMALE	1/2	EA	1
DPSG-5MF	LDE-5-MF	MALE/FEMALE	5/8	EA	1
DPSG-2S	LDE-2-S	SWEAT	1/4	EA	1
DPSG-3S	LDE-3-S	SWEAT	3/8	EA	1

REFRIGERANT CHARGING

Insta-Charge

Faster, safer and more economical method for charging LIQUID refrigerant through the low pressure side of an air conditioning or refrigeration system, without damaging the compressor. Insta-Charge's unique internal restrictor reduces liquid flow to a level below the capacity of the compressor. Converts liquid refrigerant to a saturated vapor for fast entry. Insta-Charge connects directly to the refrigerant can or cylinder valve. Adds liquid tracing dye faster. Eliminates heating of refrigerant cylinder. Made of light weight aluminum. Sold at a fraction of the cost of other fast charging devices.



RC-1

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RC-1	Insta-Charge	EA	1

DiversiTech Line Sets

DiversiTech Line Sets are individually packaged in sturdy corrugated cardboard, designed and tested for individual parcel shipment.

Line Sets are designed for air conditioning and refrigeration systems. The copper tube is refrigeration grade tubing to ASTM B280. The suction line is pre-insulated with Armaflex AP pipe insulation. This insulation is a black flexible elastomeric thermal insulation. The expanded closed-cell structure makes it an efficient insulation. It is manufactured without the use of CFC's, HFC's or HCFC's. AP Armaflex contains Microban® antimicrobial product protection for added defense against mold on the

insulation. DiversiTech Min-Split Line Sets are similar to Standard Line Sets but come with additional insulation on the liquid line and flared line ends. Copper tubing complies with ASTM B280 for Seamless Copper Tube for ACR.

AP Armaflex insulation meets ASTM C534, Type I – Tubular Grade 1, ASTM E84, NFPA 255, UL723, CAN/ULC S102, UL94 5V-5A, V-0 (E55798), NFPA 90A/90B, UL181, ASTM G21/C1338, ASTM G22, ASTM D1056 2B1, MIL-P-15280J form T, MIL-C-3133C grade SBE3, MEA 96-85-M, and City of LA RR7642.



STANDARD LINE SETS

CATALOG NO.	LENGTH (FT)	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MULTIPLE
D61220250	25	1/2	3/4	3/8	EA	1
D61220350	35	1/2	3/4	3/8	EA	1
D61220500	50	1/2	3/4	3/8	EA	1
D61420250	25	1/2	7/8	3/8	EA	1
D61420350	35	1/2	7/8	3/8	EA	1
D61420500	50	1/2	7/8	3/8	EA	1
D61230250	25	3/4	3/4	3/8	EA	1
D61230350	35	3/4	3/4	3/8	EA	1
D61230500	50	3/4	3/4	3/8	EA	1
D61430500	50	3/4	7/8	3/8	EA	1
D61280250	25	3/8	3/4	3/8	EA	1
D61280350	35	3/8	3/4	3/8	EA	1
D61280500	50	3/8	3/4	3/8	EA	1
D61480250	25	3/8	7/8	3/8	EA	1
D61480350	35	3/8	7/8	3/8	EA	1
D61480500	50	3/8	7/8	3/8	EA	1
D61880250	25	3/8	1-1/8	3/8	EA	1
D61880350	35	3/8	1-1/8	3/8	EA	1
D61880500	50	3/8	1-1/8	3/8	EA	1
D61820250	25	1/2	1-1/8	3/8	EA	1
D61820350	35	1/2	1-1/8	3/8	EA	1
D61820500	50	1/2	1-1/8	3/8	EA	1

Flexible Refrigerant Line

Flexible Refrigerant Line allows a kink-free connection from the mini-split wall unit to the lineset for easier and faster installation.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
FRL14	Flexible Refrigerant Line – 1/4 in. x 36"	EA	5
FRL38	Flexible Refrigerant Line – 3/8 in. x 36"	EA	5
FRL12	Flexible Refrigerant Line – 1/2 in. x 36"	EA	5
FRL58	Flexible Refrigerant Line – 5/8 in. x 36"	EA	5

MINI-SPLIT LINE SETS

CATALOG NO.	LENGTH (FT)	INSULATION WALL	SUCTION LINE	LIQUID LINE	UOM	ORDER MULTIPLE
D40680250B3B6	25	3/8	3/8	1/4	EA	1
D40680350B3B6	35	3/8	3/8	1/4	EA	1
D40680500B3B6	50	3/8	3/8	1/4	EA	1
D40880250B3B6	25	3/8	1/2	1/4	EA	1
D40880350B3B6	35	3/8	1/2	1/4	EA	1
D40880500B3B6	50	3/8	1/2	1/4	EA	1
D41080250B3B6	25	3/8	5/8	1/4	EA	1
D41080350B3B6	35	3/8	5/8	1/4	EA	1
D41080500B3B6	50	3/8	5/8	1/4	EA	1
D61080250B3B6	25	3/8	5/8	3/8	EA	1
D61080350B3B6	35	3/8	5/8	3/8	EA	1
D61080500B3B6	50	3/8	5/8	3/8	EA	1
D40620250B3B6	25	1/2	3/8	1/4	EA	1
D40620350B3B6	25	1/2	3/8	1/4	EA	1
D40620500B3B6	25	1/2	3/8	1/4	EA	1
D40820250B3B6	25	1/2	1/2	1/4	EA	1
D40820350B3B6	35	1/2	1/2	1/4	EA	1
D40820500B3B6	50	1/2	1/2	1/4	EA	1
D41020250B3B6	25	1/2	5/8	1/4	EA	1
D41020350B3B6	35	1/2	5/8	1/4	EA	1
D41020500B3B6	50	1/2	5/8	1/4	EA	1
D61020250B3B6	25	1/2	5/8	3/8	EA	1
D61020350B3B6	35	1/2	5/8	3/8	EA	1
D61020500B3B6	50	1/2	5/8	3/8	EA	1

If ordering by pallet, 15 line sets are packed per pallet.

White Pipe™

White Pipe pre-insulated refrigerant line is ideal for a variety of installation jobs and works for every air conditioning application including ductless mini-split, heat pump and centralized air ducted units. Available in a variety of sizes and lengths.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
WP1214-50	White Pipe, 1/4 x 1/2 in x 50 ft	EA	13
WP1238-50	White Pipe, 3/8 x 1/2 in x 50 ft	EA	11
WP1212-50	White Pipe, 1/2 x 1/2 in x 50 ft	EA	10
WP1258-50	White Pipe, 5/8 x 1/2 in x 50 ft	EA	7
WP1234-50	White Pipe, 3/4 x 1/2 in x 50 ft	EA	5
WP1278-50	White Pipe, 7/8 x 1/2 in x 50 ft	EA	5
WP1214-164	White Pipe, 1/4 x 1/2 in x 164 ft	EA	5
WP1238-164	White Pipe, 3/8 x 1/2 in x 164 ft	EA	4
WP1212-164	White Pipe, 1/2 x 1/2 in x 164 ft	EA	4
WP1258-164	White Pipe, 5/8 x 1/2 in x 164 ft	EA	3
WP1234-82	White Pipe, 3/4 x 1/2 in x 82 ft	EA	3
WP1278-82	White Pipe, 7/8 x 1/2 in x 82 ft	EA	3

REFRIGERANT LABELS

DiversiTech Refrigerant ID Labels

These 3" x 4" self-adhesive vinyl labels use a high-tack acrylic adhesive and UV cured screen printing. Color coded to conform to refrigerant labeling convention. Each label indicates the type of refrigerant (eg. R-11), the chemical name (eg. Trichloromonofluoromethane) and the UN No. (eg. UN 1078). Avoid costly mistakes by properly identifying the type of refrigerant contained in recovery cylinders and air conditioning and refrigeration equipment.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
REFRIGERANT IDENTIFICATION LABELS (3" x 4")			
04010	R-408A (FX10) Refrigerant ID Labels, pack of 10	PK	1
04011	R-11 Refrigerant ID Labels, pack of 10	PK	1
04012	R-12 Refrigerant ID Labels, pack of 10	PK	1
04022	R-22 Refrigerant ID Labels, pack of 10	PK	1
04056	R-409A (FX56) Refrigerant ID Labels, pack of 10	PK	1
04099	MO99 Refrigerant ID Labels, pack of 10	PK	1
04123	R-123 Refrigerant ID Labels, pack of 10	PK	1
04134	R-134a Refrigerant ID Labels, pack of 10	PK	1
04401	R-401A (MP39) Refrigerant ID Labels, pack of 10	PK	1
04402	R-402A (HP80) Refrigerant ID Labels, pack of 10	PK	1
04404	R-404A (HP62/FX70) Refrigerant ID Labels, pack of 10	PK	1
04407	R-407C (SUVA 9000/KLEA 66) Refrigerant ID Labels, pack of 10	PK	1
04410	R-410A (AZ20) Refrigerant ID Labels, pack of 10	PK	1
04414	R-414B Refrigerant ID Labels, pack of 10	PK	1
04421	R-421A Refrigerant ID Labels, pack of 10	PK	1
04451	R-401B (MP66) Refrigerant ID Labels, pack of 10	PK	1
04500	R-500 Refrigerant ID Labels, pack of 10	PK	1
04507	R-507 (AZ50) Refrigerant ID Labels, pack of 10	PK	1

DiversiTech Refrigerant ID Labels (cont'd)

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
NON-FLAMMABLE GAS LABELS (4" x 4")			
04700	Non Flammable Gas Labels, pack of 10	PK	1
SYSTEM REFRIGERANT/OIL LABELS (3" x 4")			
04850	Refrigerant Removed Labels, pack of 10	PK	1
04852	System Refrigerant/Oil Labels, pack of 10	PK	1
SYSTEM LUBRICANT IDENTIFICATION LABELS (2" x 3")			
04870	Polyol Ester Oil Labels, pack of 10	PK	1
04871	Mineral Oil Labels, pack of 10	PK	1
04872	Alkylbenzene Oil Labels, pack of 10	PK	1

REFRIGERANT RECOVERY PRODUCTS

Refrigerant Recovery Cylinders

DOT Classified for recovery, recycling, service and reclaim. Liquid and vapor valves ("Y" valve or separate valve configurations) are installed in all cylinders. Painted yellow/gray per ARI guidelines. Float switches have 3-pin Brad Harrison connectors.

CATALOG NO.	DESCRIPTION	DOT CLASS	3/4" NPT PLUG	FLOAT SWITCH	WATER CAP.	TARE WT.	UOM	ORDER MULTIPLE
02033	30 lb.	4BA400	YES	NO	26.2 lbs.	17 lbs.	EA	1
02035	30 lb.	4BA400	NO	YES	26.2 lbs.	17 lbs.	EA	1
02053	50 lb.	4BA400	YES	NO	47.7 lbs.	28 lbs.	EA	1
02055	50 lb.	4BA400	NO	YES	47.7 lbs.	28 lbs.	EA	1
02100	100 lb.	4BW400	NO	NO	123 lbs.	48 lbs.	EA	1
02255	250 lb.	4BW260	YES	NO	239 lbs.	85 lbs.	EA	1

Caution: Never overfill cylinders. Maximum refrigerant capacity is limited to 80% of the water capacity of the cylinder in lbs. (see table above). DOT requires cylinders to be retested every five years. Some recovery equipment uses weight scales to cut off refrigerant fill at 80% of capacity. Be sure cylinder tare weight is correct for this type of equipment.

DOT Classification Example: 4BA400: 400 psi working pressure; 800 psi test pressure (double the working pressure); 1,600 psi minimum burst pressure (double the test pressure). Pressure relief/safety valve is set to release at between 75-100% of the test pressure. For example, in the 4BA400 tanks which have a 800 psi test pressure, the relief valve opens at between 600 psi and 800 psi.



REFRIGERANT SAFETY CAPS

Refrigerant Safety Caps - Red

The Refrigerant Safety Cap gives you a quick and easy way to comply with building codes requiring tamper resistant caps on refrigerant fittings. A simple, easy to install cap, it comes with a universal key that fits most other manufacturer's caps – in addition to DiversiTech's cap. Red for R-410A.

RSC-RED-02



R-410A

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RSC-RED-02	Refrigerant Safety Caps - pack of 2, includes Universal Tool	PK	1
RSC-RED-10	Refrigerant Safety Caps - pack of 10	PK	1
RSC-RED-50	Refrigerant Safety Caps - pack of 50	PK	1

UNIVERSAL TOOL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RSC-TOOL	RSC, Universal Tool	PK	1

Refrigerant Safety Caps - Green

The Refrigerant Safety Cap gives you a quick and easy way to comply with building codes requiring tamper resistant caps on refrigerant fittings. A simple, easy to install cap, it comes with a universal key that fits most other manufacturer's caps – in addition to DiversiTech's cap. Green for R-22.

RSC-GRN-02



R-22

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
RSC-RED-02	Refrigerant Safety Caps - pack of 2, includes Universal Tool	PK	1
RSC-GRN-10	Refrigerant Safety Caps - pack of 10	PK	1
RSC-GRN-50	Refrigerant Safety Caps - pack of 50	PK	1

TUBING INSULATION

Tubing Insulation

Highest quality tubing insulation by Armacell.AC Accoflex® tubing insulation is a flexible rubber product from the inventors of elastomeric foam insulation. It is designed exclusively for HVAC, with a tough surface and excellent resistance to ultraviolet damage, condensation and mold.



3/8" WALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-3838	3/8" ID x 3/8" Wall, pack of 600'	PK	1
7-3812	1/2" ID x 3/8" Wall, pack of 480'	PK	1
7-3858	5/8" ID x 3/8" Wall, pack of 390'	PK	1
7-3834	3/4" ID x 3/8" Wall, pack of 330'	PK	1
7-3878	7/8" ID x 3/8" Wall, pack of 270'	PK	1
7-381-18	1-1/8" ID x 3/8" Wall, pack of 210'	PK	1
7-381-38	1-3/8" ID x 3/8" Wall, pack of 180'	PK	1
7-381-58	1-5/8" ID x 3/8" Wall, pack of 120'	PK	1
7-382-18	2-1/8" ID x 3/8" Wall, pack of 96'	PK	1
7-382-58	2-5/8" ID x 3/8" Wall, pack of 72'	PK	1
7-383-18	3-1/8" ID x 3/8" Wall, pack of 54'	PK	1

1/2" WALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-1238	3/8" ID x 1/2" Wall, pack of 450'	PK	1
7-1212	1/2" ID x 1/2" Wall, pack of 396'	PK	1
7-1258	5/8" ID x 1/2" Wall, pack of 300'	PK	1
7-1234	3/4" ID x 1/2" Wall, pack of 240'	PK	1
7-1278	7/8" ID x 1/2" Wall, pack of 210'	PK	1
7-121-18	1-1/8" ID x 1/2" Wall, pack of 150'	PK	1
7-121-38	1-3/8" ID x 1/2" Wall, pack of 120'	PK	1
7-121-58	1-5/8" ID x 1/2" Wall, pack of 90'	PK	1
7-122-18	2-1/8" ID x 1/2" Wall, pack of 60'	PK	1
7-122-58	2-5/8" ID x 1/2" Wall, pack of 60'	PK	1
7-123-18	3-1/8" ID x 1/2" Wall, pack of 42'	PK	1

3/4" WALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-3438	3/8" ID x 3/4" Wall, pack of 240'	PK	1
7-3412	1/2" ID x 3/4" Wall, pack of 210'	PK	1
7-3458	5/8" ID x 3/4" Wall, pack of 144'	PK	1
7-3434	3/4" ID x 3/4" Wall, pack of 138'	PK	1
7-3478	7/8" ID x 3/4" Wall, pack of 120'	PK	1
7-341-18	1-1/8" ID x 3/4" Wall, pack of 90'	PK	1
7-341-58	1-5/8" ID x 3/4" Wall, pack of 60'	PK	1
7-342-18	2-1/8" ID x 3/4" Wall, pack of 54'	PK	1
7-342-58	2-5/8" ID x 3/4" Wall, pack of 48'	PK	1

1" WALL

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
7-1078	7/8" ID x 1" Wall, pack of 90'	PK	1

The High Rise Pan™ is an innovative new plastic drain pan design which allows placement of an air handler 2-3/4" above the outside lip of the pan without the need for separate, cumbersome mounting blocks. The pan has a molded-in network of risers to give a 5" lift. The risers are positioned to accept a wide variety of air handler sizes. Each riser has a specially shaped area at each end to accommodate a 2" x 2" anti-vibration pad which allows for quiet operation at all times. Other features include heavy duty reinforcement throughout to give plenty of support as well as rolled edges for durability. One-piece plastic construction ensures no rust, leaks, or seams to split. Each High Rise Pan™ comes complete with a Condensate Cop™ float switch, six EVA™ anti-vibration pads, and one 3/4" PVC male adapter. Installation is straightforward and hassle-free.



- Nestable
- 5" Riser
- Heat/Cold resistance
- Eliminates a single line vendor
- Uses standard anti-vibration pad
- 80% thicker than the standard drain pan
- Water pushes to the side of the pan
- Heavy-duty reinforced ABS construction/flexible material
- Installation kit includes six EVA™ pads and Condensate Cop™ float switch

DISTRIBUTOR SUPPORT




LITERATURE

Catalogs

CATALOG NO.	DESCRIPTION	STANDARD PACK
LIT-CAT-CD	HVAC Catalog on CD	10
LIT-CAT-HVAC	Issue 21 Catalog	10
LIT-CAT-NEW	New Products Catalog	10

Tri-Folds

Each DiversiTech tri-fold brochure has a specific product focus. The tri-folds can be used as counter handouts, or mailed to a contractor. Brochure holders are also available. Most tri-folds are 8-1/2" high by 3-5/8" wide.



Literature Holders

CATALOG NO.	DESCRIPTION	STANDARD PACK
MKT-POP-BROCH	Brochure Holder w/DiversiTech Logo Imprinted	1
MKT-POP-BROCH4	4-Pocket Brochure Holder	1
MKT-POP-EASEL	Acrylic Tri-Fold Brochure Holder	1

Samples/Demos



CATALOG NO.	DESCRIPTION	STANDARD PACK
LIT-FLY-3D	Triple-D™ Brochure	25
LIT-FLY-3D-S	Triple-D™ Brochure (Spanish)	25
LIT-FLY-BPPPOOL	The Black Pad® Brochure	25
LIT-FLY-CDLC	Condensate Drain Line Cleaners Brochure	25
LIT-FLY-CLAD	CladLite® Pad Brochure	25
LIT-FLY-CLRVUE	ClearVue™ Pump Brochure	25
LIT-FLY-COND	Condensate Monitoring Switches Brochure	25
LIT-FLY-CS1200	CS1200 A/C Shutoff Brochure	25
LIT-FLY-CVKUBE	ClearVueKube™ Pump Brochure	25
LIT-FLY-CVKUBE-S	ClearVueKube™ Pump Brochure (Spanish)	25
LIT-FLY-CVMINI	ClearVue™ Mini Pump Brochure	25
LIT-FLY-CVMINI-S	ClearVue™ Mini Pump Brochure (Spanish)	25
LIT-FLY-DISC	Fusible Disconnect Brochure	25
LIT-FLY-DST10	Hard Start Kit Brochure	25
LIT-FLY-DTP3	Three Phase Motor Protector Brochure	25
LIT-FLY-DTP3ES	Three Phase Motor Protector Brochure (Spanish)	25
LIT-FLY-ELITE	E Lite® Pad Brochure	25
LIT-FLY-ET	A/C Easy Tee® Brochure	25
LIT-FLY-FLOW	Flow Plus™ Brochure	25
LIT-FLY-FOOT	Hef-T-Foot™ Brochure	25
LIT-FLY-FPIC	Flow Plus™ Inline Cleaner Brochure	25
LIT-FLY-GG	Drain Gun Brochure	25
LIT-FLY-HEAT	Heat Pump Pad™ Brochure	25
LIT-FLY-HEF	Hef-T-Pad Brochure	25
LIT-FLY-HPAD	Hurricane Pad Brochure	25
LIT-FLY-HRP	High Rise Pan™ Brochure	25
LIT-FLY-HSI	Universal Hot Surface Igniter Brochure	25
LIT-FLY-LS	LineSeal™ Refrigerant Sealant Brochure	25
LIT-FLY-MDP	Metal Drain Pan Brochure	25
LIT-FLY-MOTORS	Motor Brochure	25
LIT-FLY-MSPLIT	SpeediChannel™ Brochure	25
LIT-FLY-PF	Pro-Flush Brochure	25
LIT-FLY-PF-S	Pro-Flush Brochure (Spanish)	25
LIT-FLY-PUMP	Condensate Pump Brochure	25
LIT-FLY-SPRAYER	Power Sprayer Brochure	25
LIT-FLY-SPRAYER-S	Power Sprayer Brochure (Spanish)	25
LIT-FLY-UC	UltraLite® Pad Brochure	25
LIT-FLY-UCSTRAP	UltraLite® Earthquake Pad Brochure	25
LIT-FLY-UV	Pure-Beam™ UV Light Brochure	25
LIT-FLY-VENTS	Vent Termination Kits Brochure	25
LIT-FLY-WS	Wet Switch® Brochure	25

CATALOG NO.	DESCRIPTION	STANDARD PACK
6-HK2748-SAM	High Rise Pan – 27" x 48"	1
6-M3030-SAM	Metal Drain Pan – 30" x 30"	1
6-P3030L-SAM	Molded Drain Pan – 30" x 30" w/whole	1
MKT-POP-DUCTSAM	SpeediChannel Rep Sample Kit (Duct & Flat Elbow)	1
MKT-POP-WSDEMO	Wet Switch Demo Kit	1
MKT-SAM-ELEC	Sample Packet for Electrical	1
MKT-SAM-HSI	Sample Kit for TrueStart Hot Surface Igniters	1

MERCHANDISING


Posters

CATALOG NO.	DESCRIPTION	STANDARD PACK
MKT-POSTER-CLRVUE	ClearVue™ Pump Poster	1
MKT-MERCH-USACAPS	Merchandising kit for USA Capacitors	1
MKT-POSTER-HPAD	The Hurricane Pad poster	1
MKT-POSTER-MSPLIT	SpeediChannel™ Parts Poster	1
MKT-BANNER	Diversitech Vinyl Banner 2' x 5'	1

P.O.P. Merchandisers/
Displays

CATALOG NO.	DESCRIPTION	STANDARD PACK
MKT-POP-CHEM	DiversiTech/Specialty Chemical Display 26" base x 73" height	1
MKT-POP-CLRGOND	ClearVue™ Pump Display for Gondola	1
MKT-POP-CLRKIT	ClearVue™ Pump Distributor POP Kit	1
MKT-POP-CLRSHELF	ClearVue™ Pump Shelf Talker	1
MKT-POP-CLRSTAND	ClearVue™ Pump Banner Stand	1
MKT-POP-CP22	CP22 Pump Gondola Display	1
MKT-POP-CVTUBE	ClearVueTube Display	1
MKT-POP-DEV16	DEVCO Display Rack – PB16	1
MKT-POP-DEVBACKS	DEVCO Background Graphics for pegboard	Set of 2
MKT-POP-DEVBACKSSLAT	DEVCO Background Graphics for Slatwall	
MKT-POP-DEVCOMBO	DEVCO Display Rack – Combo	1
MKT-POP-DEVELEC	DEVCO Display Rack – Electrical	1
MKT-POP-DEVEZC	DEVCO Display Rack – EZC	1
MKT-POP-DTBACKS	DiversiTech Background Graphics for pegboard	Set of 2
MKT-POP-DTBACKSSLAT	Diversitech Background Graphics for Slatwall	1
MKT-POP-DUCT	SpeediChannel Merchandising Display	1
MKT-POP-HSI	Merchandiser Display for TrueStart Hot Surface Igniters	1
MKT-POP-LS	Merchandiser Display for LineSeal Refrigerant Sealant	1
MKT-POP-PF	Pro-Flush Display	1
MKT-POP-WS	Wet Switch Counter Display	1
MKT-POP-CDLC	Condensate Drain Line Cleaner Display	1
MKT-POP-ET	A/C Easy Tee Merchandiser	1

MKT-POP-CP22



MKT-POP-DEVBACKS



MKT-POP-HSI



MKT-POP-PF



MKT-POP-CDLC



MKT-POP-ET



MKT-POP-CHEM



MKT-POP-DEVCOMBO



MKT-POP-DEVELEC



MKT-POP-DEVEZC

U.S. GENERAL TERMS AND CONDITIONS**General Policy****WE ARE COMMITTED TO DO WHAT IT TAKES TO DELIVER WORLD CLASS SERVICE AND PRODUCTS.**

All items not ordered in multiples of standard package quantities will automatically be increased to the next standard package quantity. All purchase orders submitted by our customers are assumed as accepting our general terms and conditions as stated herein, any conflicting terms stated on the purchase order cannot supersede our terms.

Order Discrepancies:

All order discrepancies must be reported to us within 5 working days from the date of delivery. Any discrepancies reported after this period cannot be honored.

Terms:

1% 15 days. Net 30 days. Late charges of 1-1/2% per month will be charged following the due date of the invoice. Prices subject to change without notice.

Minimum Order:

\$100.00 minimum order on all original orders. \$15.00 Broken Pallet Charge will be added for each pad size less than the standard pallet quantities.

Freight Policy

CONTINENTAL U.S.: All orders in excess of \$2,000 will ship prepaid. This policy applies to any combination of DiversiTech, Wagner, Specialty Chemical, and Devco products.

Pick Up Allowance

3% of net invoice, 24-hour notice requested. Order must qualify for prepaid freight to receive pick up allowance.

Lost or Damaged Freight

Although we take special care to insure the safe arrival of your merchandise, our responsibility for damages cease when the customer accepts the shipment. To protect your interest, we suggest that you thoroughly inspect all items before accepting delivery. If your order was damaged in shipment or contains a shortage, report the loss or damage AT ONCE to DiversiTech. Any claims for lost or damaged freight must be noted on the Bill of Lading at the time of delivery. If damage is present, you MUST hold the original carton and merchandise for credit by your Sales Representative – otherwise, no claim can be honored.

Returns:

No merchandise will be accepted for return without prior authorization. Call our Customer Service Department to request permission to return goods. Instructions on method of return will be given to you at that time. All returns are subject to a 25% restocking charge.

Warranty Disclaimer

DiversiTech has made a diligent effort to illustrate and describe the products in this catalog accurately; however, such illustrations and descriptions are for the sole purpose of identification, and do not express or imply a warranty that the products are merchantable or fit for a particular purpose, or that the products will necessarily conform to the illustrations or descriptions. DiversiTech assumes no liability for typographical or photographic errors.

DiversiTech reserves the right to make changes in design, material or finish in an effort to improve our products without special notification. If necessary, DiversiTech reserves the right to replace any product shown in catalog with another comparable product without special notification. All DiversiTech products include a 1 year standard limited warranty unless otherwise noted.

DiversiTech's ULTRALITE®, CLADLITE®, and E LITE® Limited Lifetime Warranty

To the original owner of the ULTRALITE®, CLADLITE®, or E LITE® equipment base, DiversiTech warrants the base to be free of defects in materials and workmanship for the life of the equipment under which it is installed so long as the installing homeowner lives there. All defective merchandise must be returned to the factory, transportation prepaid, and if the same is found to be defective, it will be repaired or replaced free of charge, F.O.B. factory. This warranty does not cover replacement labor cost, or any cost claim incident to the defect, replacement, or reinstallation, nor field repair expenses. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you.

Exclusions and Limitations

DiversiTech's ULTRALITE®, CLADLITE®, and E LITE® equipment pads are designed and manufactured to be used as bases for light, ground supported equipment such as air conditioning condensers, swimming pool filters and heat pumps. Use of ULTRALITE®, CLADLITE®, and E LITE® pads for purposes other than those listed above or improper installation of ULTRALITE®, CLADLITE®, and E LITE® pads may result in pad failure. DiversiTech Corporation disclaims any liability due to such misuse or improper installation. If you have questions concerning the proper installation or use of DiversiTech's ULTRALITE®, CLADLITE®, and E LITE® equipment pads, you should contact our Customer Service Department at (800)995-2222.

Made in the U.S.A.

All item numbers in RED indicate Made in the U.S.A. This information was accurate at time of catalog printing. Visit www.diversitech.com to verify country of origin for any DiversiTech product.

DOMESTIC CREDIT APPLICATION

COMPANY NAME: _____	For internal use only CUSTOMER #: _____
----------------------------	---

SHIP TO _____ PHONE # _____

ADDRESS _____ FAX # _____

CITY/STATE _____ ZIP CODE _____

E-MAIL _____

BILL TO _____

NAME _____ PHONE # _____

ADDRESS _____ FAX # _____

CITY/STATE _____ ZIP CODE _____

E-MAIL _____

PRINCIPALS _____**BUYING GROUP MEMBER** _____**BUSINESS STRUCTURE*:** CORPORATION _____ PARTNERSHIP _____ INDIVIDUAL _____ *Please check one**CREDIT LIMIT REQUESTED** _____ **DUNS #** _____**ESTIMATED SALES VOLUME** _____ **FEDERAL TAX ID #** _____**YEARS IN BUSINESS** _____**BANK REFERENCE****NAME** _____ **PHONE #** _____**ADDRESS** _____ **OFFICER** _____**CITY/STATE** _____ **ZIP CODE** _____**ACCOUNT #** _____**THREE MAJOR TRADE REFERENCES (U.S. based are preferred)****NAME** _____ **TITLE** _____**CONTACT** _____ **PHONE #** _____**CITY/STATE/ZIP** _____ **FAX #** _____**E-MAIL** _____ **ACCOUNT NUMBER** _____**NAME** _____ **TITLE** _____**CONTACT** _____ **PHONE #** _____**CITY/STATE/ZIP** _____ **FAX #** _____**E-MAIL** _____ **ACCOUNT NUMBER** _____**NAME** _____ **TITLE** _____**CONTACT** _____ **PHONE #** _____**CITY/STATE/ZIP** _____ **FAX #** _____**E-MAIL** _____ **ACCOUNT NUMBER** _____

CATEGORY INDEX

007 Control Checker.....	171	Aluminum Armored MC Cable	136	Caulking Sealant	86
2-in-1 Copper Tube Cleaning Brush	162	Aluminum Dryer Vent Hoods, Kits, and Fittings.....	32	CBC II Contact Cleaner	78
3-36® Multi-Purpose Lubricant	82	Aluminum Foil Tape	36	Channellock® Products	164
3/4™ Rubber Elbow	190	Aluminum Solderless Lugs	120	Channels	201
4-Piece Hook and Pick Set	171	Anchor Kit	87	Chip Brushes.....	161
45 Degree Ell	44	Anchors	102-103	Chlor-Free® Degreaser	80
45 Degree Ell C x C	233	Angle Iron Brackets	27	Circuit Breakers	149
45 Degree Flat Bend.....	202	Anti-Vibration Pads	28	Citrus Degreaser.....	80
45 Degree Street Ell Ftg. x C.....	233	Armored Connector	117	CladLife® Pads.....	22
45 Elbows	186	Armored Plug	117	Clean Out Tee.....	190
45 Ell (Slip x Slip).....	188	Aviation Snips.....	174	Clear Vinyl Tubing	75
6180 Series Terminal Blocks	119	Batteries.....	79	ClearVueKübe™ Pump.....	70
6190 Series Terminal Blocks	119	Bearings.....	133	ClearVue™ Mini.....	70
90 Degree Ell	44	Bi Flow Driers	242	ClearVue™ Pump	70
90 Degree Ell C x C	232	Bi-Metal Reciprocating Saw Blades.....	173	ClearVue™ Traps	72
90 Degree Flat Bend.....	202	Big Helper™ - PVC Pipe Cutter	180	ClearVue™ Tube & Traps	72
90 Degree Inside Elbow.....	202	Black Jack Roof Cement	87	Clipboards.....	164
90 Degree Long Radius Bend.....	202	Black Nylon Cable Tie Assortment.....	107	Clipboards and Form Holders.....	164
90 Degree Long Turn Ell C x C.....	233	Black Nylon Ties with Mounting Hole	157	Clips	114
90 Degree Long Turn Street Ell Ftg. x C	232	Black Nylon Wire Ties	157, 204	Cloth Duct Tape	36
90 Degree Outside Elbow	202	Black Steel Welded Nipples.....	44	CO2 Cylinders	160
90 Degree Street Ell	45	Blade Auto Fuses	115	CO2 Detectors.....	42
90 Degree Street Ell Ftg. x C.....	233	Blind Rivet Tools	109	Coil Cleaners.....	218-219
90 Elbow (Hub x Hub)	186	Blower on Relays.....	40	Coil Cleaning Aerosols	220
90 Ell (FIPT x FIPT).....	187	Blue Label Permanent Air Filters	35	Coil Guard™	219
90 Ell (Slip x FIPT)	187	Booster Fans	31	Combination CO & Smoke Alarms	42
90 Ell (Slip x Slip).....	187	Box Cover Units	145	Combination Couplings	106
90 Ell Reducing (Slip x FIPT)	187	Boxes, Rings, and Covers.....	104-105	Combination Packs.....	97
90 Ell Reducing (Slip x Slip).....	187	Brass Adapters.....	236	Combination Screwdrivers	174
90 Street Ell (MIPT x Slip).....	188	Brass Fittings.....	238	Combo Head Sheet Metal Screws	111
90 Street Ell (SPIG x Slip).....	188	Brushes.....	161	Compartmented Storage Boxes	151
A/C Brackets.....	27	Bubble-N-Trouble™ Leak Detector	224	Compression Connector	238
A/C Condensate Drain Pan Fittings	74	Bug Spray	88	Compression Elbow.....	238
A/C Easy Tee.....	73	Bulbs	105	Compression Nut.....	238
A/C Riser Blocks	26	Bushing	45	Compression Sleeve	238
A/C Secondary Condensate Drain Pans	73	Bushing (MIPT x FIPT)	182	Compression Sprayers	223
Abrasive Cloths.....	78	Bushings and Locknuts	108	Compression Tee	238
Access Fittings	236	Butt Connector Assortment Kit	99	Compression Union	238
Accessories	219-220	Butt Connectors – Insulated	98	Compressor Heaters	147
Acid Eliminator™	229	BX and Greenfield Connectors	106	Compressor Lead Kit.....	97
Acid Test Kits.....	227	BX Set Screw Connectors	137	Compressor Repair Kit	151
Acrylic Latex Painter's Caulk	86	Cable Connectors.....	106	Compressor TOTE.....	170
Adapter (Insert x Slip).....	190	Cable Markers	121	Concentric Vents	41
Additives	229	Cable Staples.....	137	Condensate Cop™	71
Adjustable Condenser Guard.....	28	Cable Tie Assortment Pack	156	Condensate Drain Line Switches	71
Adjustable Delay on Break Time	145	Cable Tie Mounts.....	107	Condensate Drain Pans	73
Adjustable Delay on Make Timer.....	145	Cable Ties and Accessories	107	Condensate Drain Pans, Fittings, Adapters	73
Adjustable Equipment Risers.....	26	Calipers	164	Condensate Pumps	70
Adjustable Flat Bend.....	201	Canopy Strap	175	Condenser Equipment Mounting	27
Aerosols	78	Canvas Drop Cloths	80	Condenser Fan Motors.....	132
Air Filters	35	Cap (FIPT).....	189	Condenser/Heat Exchanger Brushes.....	163
Air Handler Base.....	26	Cap (Slip)	188	Conduit Fittings	108
Air Handler Blocks	26	Capacitors.....	137-140	Conduit Nipples.....	108
All Purpose Cleaning Pads	78	Carabiners	175	Conduit, Fittings, Cable	136
All Purpose Enamel	83	Carbon Monoxide & Smoke Alarms	42	Contact Cleaner	79
All Purpose Lubricant.....	82	Carbon Steel Curved Handle Scratch Brush	163	Contact Accessories.....	142
All Purpose Sprayers.....	223	Carbon Sealing Tape.....	79	Contactors	141
All Weather PVC Cement.....	184	Carton Tape Dispenser.....	79	Cool Weld™ Heat Barrier Spray	219
All Weather Test Leads	176	Catalogs	248	Cop Cap™ Locking Valve Cover	236
All-Purpose Clear Cement	184	Caulk Gun.....	86	Copper Coupling with Dimple Stop.....	235
Allen Duracast Fold Ups.....	161			Copper Coupling with No Stop	235
Allen Wrenches	161			Copper Fittings	232-235

Copper Saddle Valve.....	237	Drain Pan Disinfectant, Sealant	220	Female Adapter Elbow (Barb x FIPT)	183
Copper Tube Fitting Brushes	162	Drain Pans	73-74	Female Adapter Ftg. x F	232
Core Removal Tool	237	Drain Trap Kits	72	Female Adapter Reducing (Slip x FIPT) ..	189
Core Storer.....	237	DrainDawg™	72	Fender Washers	110
Cork Insulation Tape	76	DrainKat™	72	Fin Tools.....	165-166
Cotter Pins	112	Driers, Sight Glasses.....	241	Fin Whisk	163
Coupling	44	Drive Fasteners.....	102	Finished Hex Nuts.....	109
Coupling (Slip x Slip)	188	Drop Cloths	80	Firestop Products for Class A Buildings ..	86
Coupling (Socket) with Rolled Tube Stop C x C	233	Drop-In Expansion Anchor Setting Tool... 102		First Aid Kits.....	84
Couplings (Hub x Hub)	186	Drop-In Expansion Anchors	102	Fitting Reducer Coupling Ftg. x C.....	234
CP-22 Low Profile Pumps	70	Dryer Duct, Vent Hose, Hose Clamps.....	32	Fittings.....	201
CP-22 Pumps	70	Dryer Hose Clamps	33	Flag Disconnects.....	97
CPVC-CTS Pipe and Fittings.....	182	Dryer Vent Hose.....	32	Flag Female Compressor Terminal Kit	97
CPVC-CTS Pipe by FlowGuard® Gold™ ..	182	Dual Element Fuses	115	Flag Female Compressor Terminals	97
Cross (Slip x Slip x Slip x Slip).....	188	Duct Cleaning Brush.....	162	Flame Sensor	41
CS1200 AC Shutoff Switch	71	Duct End	203	Flare Tee.....	239
Cushion Clamps.....	240	Duct Fans.....	31	Flare Union	239
Cushioned Pillow Blocks	133	Duct Strap.....	34	Flare x FIP Union.....	240
Cutting Oil.....	82	Duct Strap, Ties, Clamps	33, 156	Flare x Flare Swivel Union	240
Cylinder Valves	160	Duct Tape	36	Flare x MIP Elbow	238
D'Scale™ Acid Scale Remover	227	Duct-Fresh Gel	224	Flare x MIP Reducing Elbow	238
Definite Purpose Contactors.....	141	Duct-Fresh Spray	224	Flare x MIP Union	239
Degreasers.....	80	Dust Masks	84	Flashlights and Lanterns By Rayovac	166
Deluxe Hi-Tension Hacksaw.....	173	DWV Bend Fittings.....	186	Flashlights By Mag-Lite®	167
Detecto™ Iridescent Leak Detector	224	DWV Bushings.....	186	Flat Wall Escutcheon	204
Devco Crimpers.....	109	DWV Vent Tee	186	Flat Washers	110
Device Rings	104	E Lite® Pads	21	Fleible Refrigerant Line	243
Dial-a-Mix Sprayer	223	E-Z™ Ratchet II Tube and Pipe Cutter ... 179		Flex Duct Tape	36
Digital 1 Piece Air Flow Meter with CFM Display.....	168	E-Z™ Ratchet Tubing Cutter	179	Flex Joint	203
Digital Fractional Calipers	164	Eco-Coil™ Environ. Friendly Coil Cleaner	218	Flow Plus™ Condensate Pan Treatment.....	225
Digital Jumbo Display Service Thermometer.....	179	Economy Electrical Tape	150	Flow Plus™ Inline Cleaner.....	72
Digital Multimeter with Bright Screen Display	170	Egg Crate Louvers - Air Return	31	Flow-Plus Inline Cleaner.....	72
Digital Single Phase Line Voltage Monitor....	146	Elbow (Barb x Barb).....	183	Flow-Plus™ Condensate Pan Treatment.....	225
Digital Temperature and Humidity Pen ... 178		Elbow (FIPT x FIPT).....	183	Flowmeters	160
Digital Therm. with 2 K-Type Probes and Case	177	Electrical Duplex Receptacles	148	Flue Caps.....	31
Digital Three Phase Line Voltage Monitor.....	146	Electrical Outlet Boxes, Extentions and Covers	148	Flush Bushing.....	234
Digital UL Listed Multimeter.....	169	Electrical Staples.....	108	Flushing Products	222
Direct Drive Furnace Blower Motors.....	132	Electrical Tapes.....	150	Foam Insulation Tape.....	76
Direct Replacement Igniters	40	Electrical Tapes.....	150	Foam Sealant - One Component	85
Disconnect Switches.....	135	Electrical Toggle Switches	148	Foam Sealant - Two Component.....	85
Disconnects - Metal Case	135	Electrolytic Copper Solderless Lugs	121	Foam-Plus™ Aerosol Foaming Coil Cleaner	220
Disconnects - Non Metallic Case.....	135	Electronic Degreaser	80	Foil Scrim Kraft Tape	36
DiversiGum™ Sealing Compound	86	Electronic Utility Scales.....	173	Fresh-Coil.....	219
DiversiTech Gas Connectors.....	42	EMT (Thinwall) Fittings.....	136	Fully Insulated Dead End Connectors	98
DiversiWhips	134	Enviropad™	25	Fully Insulated Female Slip-On	96
DiversiWhips for the Swimming Pool Industry.....	134	Epoxy Coated Gas Connectors	42	Fully Insulated Flag Female Slip-Ons	97
DiversiWhips Pallet Packs.....	134	Equipment Support Systems	201	Fully Insulated Male Slip-Ons	96
DiversiWhips with Extended Length Wires....	134	EVA Anti-Vibration Pad	28	Fully Insulated Receptacles	97
Dormont 20 Series	43	Expando Adjustable Condenser Tube Cleaner	170	Furnace Mounting Blocks.....	26
Dormont 20 Series with Valve	43	Extension Cords.....	165	Furnace Pans	74
Dormont 30 Series	43	Extension Rings	104	Fuse Adapters.....	145
Drain Dawg™ and Drain Kat™ Fittings.....	73	Extension Rods for Condenser Tube Brushes	163	Fuse Holders	119
Drain Gun and Cartridges	72	Fan Centers.....	143	Fuse Pullers	145
Drain Line, Tubing	75	Fast Cure Epoxy.....	85	Fuseblocks	145
		Fast Orange® Hand Cleaner	80	Fuses.....	144
		Felt Tip Markers	83	Fusible Links.....	152
		Female Adapter (Barb x FIPT)	182	Gallo Gun™, Charles	72
		Female Adapter (Slip x FIPT).....	189	Garden Hose	223
		Female Adapter C x F.....	232	Garden Hose Adapters	182
				Gas Ball Valve	43
				Gas Pressure Test Kit.....	168

CATEGORY INDEX cont'd

Gas Valves and Connectors	42	High Temperature Wire	155	Literature Holders	248
Gauges	167	Hobby and Cutting Knives	168	Little Helper™ - All Purpose Cutter	179
General Purpose Pumps	70	Homeline Circuit Breakers, Square D	149	Louvered Dryer Vent Hood	33
General Purpose Relays	143	Horizontal Refrigerator/Freezer Analog Therm.....	178	Low Profile Disconnects - Metal Case	135
General Purpose Spray Paint.....	83	Horizontal Vent Term Kits	41	Low Profile Pumps	70
General Purpose Switching Relays	143	Hose Clamps.....	112	Low Voltage Screwdriver Tester	176
General Tools	109	Hose Mender (Barb x Barb)	183	Lubricants	81
Geocel Caulking Sealant.....	86	Hoses	160	LuxPro Thermostats.....	153
Glass Cleaner.....	78	Hoses, Sprayers	223	MAC-The Ultimate in Line Piercing Valves.....	237
Glass Cloth, Economy Electrical Tapes ..	150	Hot Surface Igniters	40	Machine Screw Hex Nuts	109
Gloves.....	84	Hot Water Hose	223	Mag-Life® C and D Cell Flashlights	167
Glycol Inhibitors	229	Hurricane Pad™.....	23	Mag-Life® Replacement Bulbs	167
Glycols.....	221	Hurricane Pad™ Attachment Bracket.....	23	Magjumper	176
Gorilla Tube™ Clear Vinyl Tubing.....	75	HVAC Airflow Instruments	168	Magna-Lite	167
Grease Fittings	113	HVAC Tools	174	Magnetic Hex Chucks	109
Grip-Cut™	78	HVACR Refrigerant Leak Detector with Pump	169	Magnetic Nut Setters - Bulk.....	171
Grommets - Vinyl	151	Hydroguage Manometer	168	Male Adapter (Barb x MIPT).....	182
Ground Adapter	117	Ice Machine Products	224	Male Adapter (MIPT x Slip).....	189
Ground Fitting Clamp.....	121	Icemaker Kit	191	Male Adapter C x M	232
Grounding Rubber Handle Plug	116	Igniters.....	40	Male Adapter Elbow (Barb x MIPT).....	183
Hand Cleaners	80	In-Line Fuse Holder	145	Male Adapter Fig. x M	232
Hanging Strap	175	Incandescent Light Bulbs	105	Male Adapter Reducing (MIPT x Slip).....	189
Hanging Wire	34	Indicator Lights.....	120	Malleable Black Iron Pipe Fittings.....	44
Hard Start Kits	140	Industrial Enamel	83	Manifold Gauge.....	167
Heat Pump Pad™.....	25	Industrial Towels	81	Manometers, Pressure	168
Heat Pump Risers	26	Insta-Charge.....	242	Manual Reset Fire Stat.....	152
Heat Resistant Cloth	180	Insta-Tap Refrigerant Recovery Tool.....	237	Map-Pro and Propane Gas.....	180
Heat Shrink Tubing.....	119	Insulated Butt Connectors	98	Markers.....	83
Heat Shrink Tubing - 50% Polyolefin	151	Insulated Female Slip-Ons	96	Masonry Bit	87
Heat Shrink Tubing Assortments.....	119	Insulated Flange Spades	99	Masonry Screw	87
Heating Cables.....	41	Insulated Hooks	98	Measuring Tapes, Staples and Staple Guns ..	169
Heavy Duty Bracket.....	27	Insulated Male Slip-Ons	96	Mechanical Pickup	172
Heavy Duty Cable Ties.....	33, 156	Insulated Plugs.....	97	Mechanical Screw Starter	170
Heavy Duty Degreaser	80	Insulated Rings.....	99	Medium Split Lock Washers	110
Heavy Duty Degreaser II.....	80	Insulated Spades.....	99	Merchandising	249
Heavy Duty High Rise Pans.....	74	Insulated Spring Spades	99	Metal Bat Handle Toggle Switches	118
Heavy Duty Nylon Cable Ties	107	Iso-Cube Economy Anti-Vibration Pad	28	Metal Drain Pan.....	74
Heavy Duty PVC Cement	184	J-B Weld	85	Metal Drive Anchors.....	102
Heavy Duty Ratchet Strap.....	175	Jumbo Display Indoor/Outdoor Thermometer	178	Metal Guard Trouble Lights.....	165
Heavy Duty Silicone Mold Release.....	82	Kimberly-Clark Waterless Hand	80	Metal Parts Boxes	113
Heavy Duty Work Gloves	84	Kimtex® Towels	81	Metallic Ducts	33
Hef-T-Block™.....	27	Knock'er Loose® Penetrating Solvent	81	Meters, Detectors, Alarms	169
Hef-T-Brackets™.....	27	Knockout Seals and Hole Plug.....	108	Mini AC AMP Clamp Meter.....	169
Hef-T-Foot™.....	201	Kut-All Plastic Tube and Hose Cutter.....	179	Mini Mag-Lite®.....	167
Hef-T-Pad™.....	24	Lashing Strap	175	Mini Split Condensate Drain.....	75
Hex Head Cap Screws.....	110	Latex Gloves.....	84	Mini Split Line Sets	243
HF™ Contact Cleaner	79	Leak Detectors.....	224	Mini-Split Drain Adapters.....	75
High Heat Spray Paint.....	83	Leak Test Gauge	176	Mini-Split Pump.....	70
High Performance Refrigerant Leak Detector	169	Leather Work Gloves.....	84	Miscellaneous Tools.....	170
High Rise Pans™	74	LED Screwdriver Continuity Tester	176	Monitors.....	146, 171
High Temp Red Silicone Sealant	86	Light Bulbs	105	Motor Bolts.....	110
High Temperature Assortment.....	100	Line Piercing Valves and Tools.....	237	Motor Brackets	133
High Temperature Butt Connectors	100	Line Sets	243	Motor Mount - Flex Bracket.....	133
High Temperature Condenser Fan Motors	132	LineSeal™ Refrigerant Line Sealant.....	229	Motor Run Capacitors - 370VAC	138
High Temperature Female Slip-Ons.....	100	Liquid Line Driers.....	241	Motor Run Capacitors - 440VAC	139
High Temperature Flag Female Slip-Ons.....	100	Liquid Tite Connectors.....	136	Motor Run Capacitors USA Made.....	137
High Temperature Male Slip-Ons.....	100	Liquid Tite Flexible Conduit.....	136	Motor Shaft Key Assortments.....	113
High Temperature Rings	100	Liquid Tite Connectors.....	106	Motor Start Capacitors	140
High Temperature Solderless Terminals ..	100	Literature.....	248	Motors	132
High Temperature Spades	100			Mounting Brackets, Blocks.....	26-27

Multi Color Test Leads	176	Pocket HVAC Gen Purpose IR	Furnaces	184
Multi-Head Fin-Tool	165	Thermometer.....	PVC Primer - Clear	184
Multiple Horsepower Condenser Fan		Polyethylene Tubing	PVC Primer and Cement	185
Motors	133	Polypropylene Parts Boxes.....	PVC Ratchet Cutter	180
Multiple Horsepower Motors.....	133	POP Merchandisers	PVC Schedule 40 Pressure Fittings.....	187
Nitrile Gloves.....	84	Porcelain Outlet Box Lampholders.....	QD® Contact Cleaner.....	79
Nitrogen Cylinders	160	Porcelain Wire Connectors	QO200TR A/C Disconnect	135
Nitrogen Purge Tool	160	Portable Hand Torch.....	Quick-Tap	237
Non-Insulated Female Slip-Ons	96	Posters	Quick-Tap-2	237
Non-Insulated Flag Female Slip.....	96	Potential Relays.....	Radiant Leak Finder™.....	220
Non-Insulated Male Slip-Ons.....	96	Power Blocks	Rain-R-Shine Blue Cement.....	184
Non-Insulated Plugs	97	Power Cords and Work Lights	Ratchet Strap	175
Non-Insulated Rings	99	Power Measuring Tapes	Rayovac Industrial Flashlights and Lanterns.	
Non-Insulated Spades.....	99	Power Sprayer		166
Non-Insulated Spring Spades.....	99	Power Supply Cords (Pigtails).....	Rayovac Industrial Max Alkaline Batteries.	79
Non-Metallic Sheathed Cable.....	137	Power Supply Replacement Cords	Rayovac Industrial Swivel Lights	166
NT™ Precision Cleaner	80	Pro-Air Duct Sealant™ UL 181.....	Rayovac Lantern Batteries	79
Nut Setter - Power.....	171	Pro-Air Indust Grade Adhesive	Rayovac LED Flashlights	166
Nut Setters.....	171	Pro-Blue™	Rayovac Roughneck Flashlights	166
Nuts and Bolts.....	109	Pro-Brown™	Reach-It	172
Nylon Cable Clamps	112	Pro-Bubble™ Leak Detector.....	Receptacles	118
Nylon Cable Ties.....	107	Pro-Flush™	Red Label Permanent Air Filters	35
Nylon Cable Ties with Mounting Hole.....	107	Pro-Flush™ Accessories	Reducer Bushing (SPIG X FIPT).....	189
Nylon Fittings	182	Pro-Green™	Reducer Bushing (SPIG x Slip)	189
Nylon Insert Lock Nuts	109	Pro-Kleen™	Reducer Coupling.....	203
Nylon Nut and Washer	112	Pro-Lube-ALK™ Alkylbenzene.....	Reducer Coupling w/Stop C x C.....	234
Nylon Rods.....	112	Pro-Lube-POE™ Polyolester	Reducing Bushing (MIPT X FIPT).....	188
Oatey® Products	184	Pro-Lube-VAC™ Vacuum Pump Oil.....	Reducing Coupling	44
Odor Neutralizers	224	Pro-Lube™ Mineral Oil	Reducing Tee	45
Offset Snips.....	174	Pro-Prime™ Clear PVC Primer	Reducing Tee C x C x C	235
Oils.....	226-228	Pro-Prime™ PVC Primer (Purple).....	Reducing Washers.....	108
One Time Fuses.....	144	Pro-Red Plus™	Refractometers	172
Outdoor Extension Cord	165	Pro-Thaw™ Liquid Dryer for Refrigerants.	Refrigerant Charging.....	242
Outside Tube Cleaning Brushes	162	Pro-Tite™	Refrigerant ID Labels	244
P-Traps.....	235	Pro-Treat® 151	Refrigerant Recovery Cylinders	244
P.O.P. Merchandisers / Displays	249	Pro-Treat® 152.....	Refrigerant Recovery Products.....	244
Paints and Primers	83	Pro-Treat® 161	Refrigerant Safety Caps.....	245
Pan Treatments/Disinfectants.....	225	Pro-Treat® 200.....	Refrigeration Oils.....	226-227
Pan-Kote Heavy Duty Drain Pan Patch.....	220	Pro-Treat® 217.....	Refrigerator Coil Brush.....	161
Pan-Patch™	220	Pro-Treat® 350.....	Refrigerator/Freezer Analog Thermometer	
Parts Cleaning Brush	162	Pro-Treat® Pan Strips.....		178
Periscope Connection Kit	33	Pro-Weld™ PVC Cement	Refrigerator/Oven Thermometer	178
Permanent Air Filters.....	35	Pro-Weld™ PVC Cement (Heavy Body) ...	Regulators.....	160
Pigtails.....	121	Pro-Weld™ PVC Cement (Regular Body) .	Rehvac Nitrogen Purging Equipment	160
Pilot Burners.....	40	Pro-Weld™ PVC Cement (Universal).....	Rehvac Refillable Gas Cylinder.....	160
Pipe Hanging Strap.....	112	Pro-Yellow™	Relays	143
Pipe Mounted Switches.....	71	ProTek BG™ Boiler Grade.....	Replacement Compressor Leads	151
Pistol Grips & Water Nozzle.....	223	ProTek EG™	Replacement Element Kits	152
Plastic Anchor Kits	103	ProTek™ Closed Loop Heat Transfer Fluid	Retrieving Tool/Mini-Lights	172
Plastic DWV J-Hooks.....	190	ProTek™ PG 100	Rheem Motor Bracket	133
Plastic Hanger Strap	34	ProTek™ PG Plus	Right Angle Plug	117
Plastic Thermostat Guards.....	153	PTFE Tape.....	Rigid Conduit Bodies	106
Plastic Wall Plates	149	Pull-A-Spout Oiler	Romex Connectors - Metallic.....	136
Plastic Wide Mouth Dryer.....	32	Pump Parts & Accessories	Roof Flashing	31
Plated Steel Utility Covers	104	Pumps	Roof Inlets.....	204
Plenum Thermostat Wire	154	Pure-Beam™ Ultraviolet Light.....	Roof Louver	31
Plier Flaring Tool	179	Purple Primer for PVC Pipe and Fittings .	Rope.....	175
Plug	45, 188-189, 239	PVC Cement - Clear	Rough Service Light Bulbs.....	165
Plug Fuses	144	PVC Condensate Pipe	Round Extension Cords.....	111
Plug (MIPT)	189	PVC Condensate Pipe - White	Rubber / Cork Anti-Vibration Pad.....	28
Plug (Slip).....	188	PVC DWV Fittings.....	Rubber Anti-Vibration Pad	28
Pocket 4-in-1 Mini Screwdriver	173	PVC Gray Cement for High Efficiency	Rubber Connector	117

CATEGORY INDEX cont'd

Rubber Tie Down Strap.....	175	Sprayers.....	223	Terminals, Connectors.....	151
Saf-N-Kleen™ Aerosol Solvent Coil Cleaner.....	220	Square D Electrical Disconnects.....	135	Terry Towels.....	81
Safety Caps.....	245	Sta-Plex™ Premium Red Grease.....	82	Test Cord (Female).....	176
Safety Overflow Switch (SOS).....	71	Standard Line Sets.....	243	Test Kits, Strips, and Prevent.....	227
Safety Plates.....	105	Standard Solderless Terminals.....	98	Test Leads.....	114, 176
Safety Supplies, Devices.....	84	Standard Test Leads.....	176	Testers.....	114, 176
Samples/Demos.....	248	Standard Wire Connectors.....	120	Testers, Leads, Clips, Fuses.....	114
Sani C-N-D™ Coil and Drain Pan Disinfectant.....	220	Staples.....	137	TFFN Stranded Hook-Up Wire.....	115
Satchel Style Case.....	113	Steel 1900 Boxes.....	104	The Black Pad®.....	24
Saws and Saw Blades.....	173	Steel 1900 Covers.....	105	The Hurricane Pad™.....	23
Scales.....	173	Steel Octagon Box.....	104	The Hurricane Pad™ Bracket.....	23
Scotch 35 Vinyl Electrical Tape.....	150	Steel Thermostat Guards.....	153	The Hurricane Pad™ MD.....	23
Scotch 3M Super 33+ Electrical.....	150	Steel Utility Boxes.....	104	The Hurricane T-Class Pad™.....	23
Scotch 3M Super 88 Electrical.....	150	Stick-E-Tape.....	36	The Quad™ 14-Piece Saw/Drive.....	168
Scotch® Electrical Tapes.....	150	Sting Less Wasp & Hornet Killer.....	88	Theft Prevention.....	28
Screwdrivers, Driver Sets.....	173	Storage Containers.....	113	Thermal Controls.....	152
Screwloose® Industrial Penetrating Oil.....	81	Stove Bolts.....	110	Thermometers.....	177-178
Screws.....	87-88, 111	Stranded Copper THHN Wire.....	154	Thermometers/Probes.....	177
Sealant, Epoxy, Glue.....	85	Stranded Copper Wire on Spool.....	155	Thermoplastic Handle Plug.....	116
Sealing Compounds, Adhesive.....	85	Stranded Copper Wire on Spool, 100 Feet.....	154	Thermostat Guards.....	153
Self Tapping Water Valve.....	191	Stranded Copper Wire, 194 Degree F....	154	Thermostat Wire.....	116, 154
Self-Drilling Gypsum Wallboard Anchors.....	102	Stranded High Temperature Wire.....	116	Thermostats.....	153
Self-Drilling Screw Repair Kit.....	111	Strapping Hanger Iron.....	33	THHN Stranded Hook-Up Wire.....	115
Self-Drilling Screws.....	111	Straps.....	108	Thinwall E.M.T. Connectors.....	106
Semi-Rigid Aluminum Duct.....	32	Straps, Truck Rope.....	175	Thread Sealant with Teflon.....	85
Sequencers.....	152	Styrene Parts Boxes.....	114	Thread Sealants.....	228
Set Screws.....	113	Suction Line Driers.....	241	Three Phase Disconnects.....	135
Sheet Metal Gauge.....	167	Super Glue.....	85	Three Pole Definite Purpose Contactors.....	141
Sheet Metal Screw Assortment Kit.....	87	Super-Kool™ Ice Machine Cleaner.....	224	Time Delay Fuses.....	144
Sheet Metal Screw Assortments.....	111	SuperComb.....	166	Time Delay Plug Fuses.....	144
Sheet Metal Screws.....	87	Supports.....	190	Time Delays.....	145
Sheet Metal Screws Drill Point.....	88	Sure-Stick Heavy Duty Adhesive.....	78	Tin Handle Acid Brushes.....	161
Sheet Metal Screws Taper Point.....	88	Surge Protectors.....	135	Tinner Snips.....	174
Shoe Covers.....	84	Sweat-Free Pipe Insulation Spray.....	78	Toggle Bolts.....	109
Shop Towels.....	81	Switch Covers.....	149	Toggle Switch and Receptacle Combo Device.....	118
Short Forged Flare Nut.....	239	Switch/Plug Combo.....	149	Toggle Switch Cover.....	150
Short Nut.....	239	Swivel Head Deburring Tool.....	180	Toggle Switch Neon Pilot Light Combo Device.....	118
Side Flange Mount Pillow Blocks.....	133	System Cleaners.....	227	Toggle Switches.....	118, 150
Sight Glasses.....	242	T-50 Series Staples and Staple Guns.....	169	Tongue and Groove Pliers.....	164
Silicone Sealant.....	86	T-Joint.....	203	Torches.....	180
Single Piece Liquid Tite Fittings.....	137	Tab Adapters - Male Tabs.....	98	Torque Plus - Hard Start Kits.....	140
SJTO Service Cord.....	116	Tab Adapters - Piggy Back Slip-Ons.....	98	Transformers.....	142
Slip-On Solderless Terminals.....	96	Tab Adapters - Quick Disconnect with Screw.....	98	Transformers - Class 2.....	142
Slotted Round Head Machine Screws.....	111	Tab Adapters - Single Fem Dbl Male Tabs.....	98	Transparent Plastic Boxes with Terminal Asst.....	151
Smoke Detectors.....	42	Tandem Grounding Rubber Handle.....	117	Traps.....	187
Smokeys.....	31	Tap Connectors.....	98	Tri-Fold Brochures.....	248
Snips, Notchers, Crimpers, Seamers.....	174	Tapes.....	36, 76, 114	Triple Outlets.....	117
Soffit Fitting.....	201	Tattle-Tale Control Monitor.....	171	Triple-D™ Universal Coil Cleaner.....	218
Solitaire AAA Single Cell Flashlights.....	167	Tee.....	45	Trouble Lights.....	111
SP-400™ Corrosion Inhibitor.....	82	Tee (Barb x Barb x Barb).....	183	Truck Rope.....	175
Spade Terminals.....	99-100	Tee (Slip x FIPT x Slip).....	187	TrueStart® Ignition Accessory.....	40
Spark Electrode.....	41	Tee (Slip x Slip x Slip).....	187	Tube Working Tools.....	179
Special Purpose Solderless Terminals.....	97	Tee C x C x C.....	235	Tubing Insulation.....	245
Specialty Fasteners.....	112	Teflon Tape.....	114	Tubing, Clamps, and Kits.....	190
Specialty Fittings.....	113	Telescopic Inspection Mirror.....	170	Type "S" Non-Tamper Fuses.....	144
SpeediChannel™.....	201	Telescoping Mini-Light and Magnetic Pickup.....	172	Type 2 Wall Brackets.....	27
SpeediChannel™ Accessories.....	204	Teri® Towels.....	81	Type 3 Wall Brackets.....	27
SpeediChannel™ Kits.....	204	Terminal Block Jumpers.....	119	U-Type Strap.....	235
SpeediChannel™ Line Set Cover System.....	201	Terminal Kits.....	101	UL Listed Foil Tape.....	36
Split Bolt Connectors.....	121				

Ultra Lite 3-36® Lubricant.....	82
UltraLite® Earthquake Pads.....	21
Ultralite® Lightweight Equipment Pads 20-21	
UltraLite® Wedge Pads	21
UltraViolet Light	32
Union.....	45
Union C x Brass	234
Union Coupling	203
Universal Alarm	71
Universal Carbide Igniters	40
Universal Pump Elbow	204
Universal Spun Copper Driers.....	241
Upright Snips.....	174
Utility Covers	104
Utility Fuse Outlets.....	118
Utility Plates	104
Utility Scales.....	173
Vacuum Pump Oil	228
Valve Action Marker	83
Valve Action Paint Marker.....	83
Vent Termination Kits.....	41
Ventilation Products.....	31
Versa Cap® Flue and Hot Stack	31
Vinyl Grommet Assortment Packs	119
Vinyl Grommets.....	119
Wagner Adhesive Sealant	85
Wall Escutcheon.....	204
Wall Penetration.....	202
Wasp, Hornet, and Yellow Jacket Killers....	88
Waterless Hand Wipes	80
Waterproof Box with Lever Switch Cover	105
Waterproof Butt Connectors	100
Waterproof Covers.....	105
Waterproof Solderless Terminals.....	100
WD-40®	82
Weatherproof Boxes.....	105
Welder's Brush	161
Welding Torches, Supplies	180
Wet Switch Flood Detector	71
Whips	134
White Lithium Grease	82
White Nylon Ties with Mounting Hole.....	157
White Nylon Wire Ties	157
White Pipe	243
Winged Wire Connectors	120
Wire.....	116, 154
Wire and Cable Clamps - Nylon	157
Wire Connectors.....	155
Wire for Mini-Split Installation.....	154
Wire Tie Mounts.....	157
Wire/Cable Ties, Mounts, Clamps	156
Wiring Devices	116
Wolverine® Universal Hot Surface Igniter .	40
Workhorse® Manufactured Rags.....	81
WypAll Plus	81
WypAll ShopPro X80 Towels	81
Zinc Plated DC Steel Romex Connectors	106
Zinc-It® Instant Cold Galvanize.....	82

PART NUMBER INDEX

01714	85	1636-3	22	230-DLF16	75	233-292	140	3232-3	22
01724	85	16491	86	230-DLF18	75	233-292220	140	3237-2	22
02033	244	16500	180	230-DLF20	75	2424-2	22	3237-3	22
02035	244	16510	180	230-DLF25	75	2424-3	22	324-388	140
02053	244	16520	180	230-DLF32	75	2430-2	22	325-12	78
02055	244	18001	86	230-DLFY	75	2430-3	22	3345-3	22
02100	244	18002	86	230-DPML	75	2436-2	22	340-408	140
02255	244	18003	86	230-DPMM	75	2436-3	22	3434-2	22
04010	244	189-227	140	230-DPPL	75	2442-2	22	3465-3	22
04011	244	189-227220	140	230-DPPM	75	2448-2	22	357-20	220
04012	244	189-227330	140	230-DSCREW	204	2448-3	22	358-20	220
04022	244	200-240	140	230-EB3	202	2454-2	22	358-20S	220
04056	244	20-3132-18	43	230-EB4	202	2460-3	22	36-2	22
04099	244	20-3132-24	43	230-EB6	202	25001	175	362-16	78
04123	244	20-3132-36	43	230-EIN3	202	2601	223	3636-2	22
04134	244	20-3132-48	43	230-EIN4	202	2602	223	3636-3	22
04401	244	20-3135-18	43	230-EIN6	202	2603	223	3640-2	22
04402	244	20-3135-24	43	230-FB3	202	26-2	22	3640-3	22
04404	244	20-3135-36	43	230-FB4	202	2626-2	22	3648-2	22
04407	244	20-3135-48	43	230-FB453	202	2626-3	22	3648-3	22
04410	244	216-259	140	230-FB454	202	2636-2	22	3650-3	22
04414	244	216-259220	140	230-FB456	202	2660-2	22	3654-2	22
04421	244	216-259330	140	230-FB6	202	2660-3	22	3660-3	22
04451	244	23010	84	230-FJ3	203	270-324	140	3678-3	22
04500	244	230-14-4	154	230-FJ4	203	270-324220	140	37020H	138
04507	244	230-14-4S	154	230-FR3	204	270-324330	140	37030H	138
04700	244	230-14-7	154	230-FR4	204	2838-2	22	37040H	138
04850	244	230-16-2	154	230-FR6	204	30-2	22	37050H	138
04852	244	230-18-4	154	230-IK3	204	3030-2	22	37050HB	138
04870	244	230-AFB3	201	230-IK4	204	3030-3	22	37050R	138
04871	244	230-AFB4	201	230-IKC3	204	30306	164	37060H	138
04872	244	230-B1HD	27	230-IKC4	204	30309	164	37075H	138
1000-1200	140	230-B2L	27	230-INJ462	204	30310	164	37075HB	138
10012	85	230-B2M	27	230-INJ465	204	30-3131-24	43	37075R	138
1002	223	230-B2XL	27	230-LFB3	202	30-3131-36	43	37100H	138
10180	85	230-B3L	27	230-LFB4	202	30-3131-48	43	37100HB	138
10600	85	230-B3M	27	230-LFB6	202	30-3132-12	43	37100R	138
108-130	140	230-BP14W	27	230-MB14W	26	30-3132-18	43	37125H	138
108-130220	140	230-BP17W	27	230-MB17W	26	30-3132-24	43	37125R	138
108-130330	140	230-CP3	203	230-MB36W	26	30-3132-30	43	37150H	138
124-156	140	230-CP4	203	230-MBCW	26	30-3132-36	43	37150R	138
124-156220	140	230-CP6	203	230-PFB3	204	30-3132-48	43	37175H	138
124-156330	140	230-D3	201	230-SF3	201	30-3132-60	43	37175R	138
14145	31	230-D4	201	230-SF4	201	30-3132-72	43	37200H	138
14175	31	230-D6	201	230-TC34	203	3036-2	22	37200R	138
14250	31	230-DC3	203	230-TC46	203	3036-3	22	37250H	138
14340	31	230-DC4	203	230-TJ4	203	3040-2	22	37250R	138
14460	31	230-DC6	203	230-TJ6	203	3040-3	22	37300H	138
145-175	140	230-DCLIP	204	230-WC3	202	3060-3	22	37300R	138
145-175220	140	230-DCLIP-10	204	230-WC4	202	3143-2	22	37350H	138
145-175330	140	230-DE3	203	230-WC6	202	3143-3	22	37350R	138
161-193	140	230-DE4	203	230-WR3	204	315-20	78	37400H	138
161-193220	140	230-DE6	203	230-WR4	204	32-2	22	37400R	138
161-193330	140	230-DL16	75	230-WR6	204	32-3	22	37450H	138
1636-2	22	230-DL16-20	75	230-WS2	202	3232-2	22	37450R	138

PART NUMBER INDEX cont'd

37500H	138	3WF-01	226	45100HU	137	4711-12	182	4JR7570	139
37500R	138	3WF-05	226	45100R	139	4711-34	182	4JR7580	139
37550R	138	400-480	140	45125H	139	4718-12	182	4WF-01	226
37600H	138	4042-3	22	45125HU	137	4766-3	22	4WF-05	226
37600R	138	4054-3	22	45125R	139	4848-3	22	5002	109
37700H	138	4062-3	22	45150H	139	4JJ0525	139	50302	36
37800H	138	4147-2	22	45150HU	137	4JJ0530	139	5031	114
37800R	138	4147-3	22	45150R	139	4JJ0535	139	5033	114
378-440	140	4183-3	22	45175H	139	4JJ0540	139	5035	114
3842-2	22	4200AX	100	45200H	139	4JJ0545	139	5036	114
3842-3	22	4204	100	45200HU	137	4JJ0555	139	5041	114
3865-3	22	4204CX	100	45200R	139	4JJ0560	139	5042	114
3870-3	22	4205CX	100	45250H	139	4JJ1055	139	5046	114
3GJ0330	138	4213	100	45250HU	137	4JJ7535	139	5053-3	22
3GJ0515	138	4213CX	100	45250R	139	4JJ7540	139	5056-3	22
3GJ0520	138	4214	100	45300H	139	4JJ7545	139	5-05790	81
3GJ0525	138	4214CX	100	45300HU	137	4JR0440	139	5058-3	22
3GJ0530	138	4215	100	45300R	139	4JR0520	139	5070-3	22
3GJ0535	138	4215CX	100	45350H	139	4JR0525	139	5-10	184
3GJ0540	138	4219	100	45350HU	137	4JR0525U	137	5-100020	186
3GJ0545	138	4220	100	45350R	139	4JR0530	139	5-100030	186
3GJ0555	138	4220CX	100	45400H	139	4JR0530U	137	510-3400	190
3GJ1015	138	4221	100	45400HU	137	4JR0535	139	510-3400-10	190
3GJ1025	138	4221CX	100	45400R	139	4JR0535U	137	510-437338	186
3GJ1060	138	4224	100	45450H	139	4JR0540	139	510-438338	186
3GJ1520	138	4224CX	100	45450HU	137	4JR0540U	137	5107	109
3GJ7530	138	4224NX	100	45450R	139	4JR0545	139	510-D102251	186
3GJ7535	138	4226	100	45500H	139	4JR0545U	137	510-D102338	186
3GJ7545	138	4226CX	100	45500HU	137	4JR0550	139	510-D304020	186
3GJ7555	138	4231	100	45500R	139	4JR0550U	137	510-D304030	186
3GR0325	138	4252	100	4550-3	22	4JR0555	139	510-D309020	186
3GR0330	138	4252CX	100	45550H	139	4JR0555U	137	510-D309030	186
3GR0335	138	4253	100	45550R	139	4JR0560	139	510-D323020	186
3GR0340	138	4253CX	100	4558-3	22	4JR0560U	137	510-D323030	186
3GR0425	138	4254CX	100	45600H	139	4JR0570	139	510-D441020	186
3GR0435	138	4293	120	45600HU	137	4JR0580	139	510-D441030	186
3GR0515	138	4293CX	120	45700H	139	4JR0580U	137	5-11830	31
3GR0520	138	4294	120	45700HU	137	4JR1055	139	5-11840	31
3GR0525	138	4294CX	120	45800H	139	4JR1060	139	5-11853	31
3GR0530	138	4296	120	45800HU	137	4JR1080	139	5-11866	31
3GR0535	138	4296CX	120	460-552	140	4JR7525	139	5-11879	31
3GR0540	138	43-53220	140	4700-12	182	4JR7530	139	5-12	184
3GR0545	138	43-53330	140	4700-34	182	4JR7530U	137	5-14	184
3GR0550	138	436-20	88	4701-12	182	4JR7535	139	515-J2000	190
3GR0555	138	45020H	139	4701-34	182	4JR7535U	137	515-J3000	190
3GR0560	138	45030H	139	4703-12	182	4JR7540	139	5200	111
3GR0570	138	45040H	139	4703-34	182	4JR7540U	137	5-2001	186
3GR0580	138	45050H	139	4704-12	182	4JR7545	139	5-2002	186
3GR1035	138	45050HU	137	4704-34	182	4JR7545U	137	5-2005	186
3GR1080	138	45050R	139	4706-12	182	4JR7550	139	5201	111
3GR7530	138	45060H	139	4706-34	182	4JR7550U	137	5223	117
3GR7540	138	45075H	139	4707-12	182	4JR7555	139	5225	111
3GR7555	138	45075HU	137	47072-12	182	4JR7555U	137	5230	111
3GR7560	138	45075R	139	47072-34	182	4JR7560	139	5231	105
3GR7580	138	45100H	139	4707-34	182	4JR7560U	137	5232	105

PART NUMBER INDEX cont'd

5240	117	5384	112	540-799	83	541-300	177	5-447007	188
5242	117	538-4-1/8	240	5-408	187	5-414	187	5-447010	188
5246	114	5385	112	540-800	83	5-41411	81	5-447012	188
5252-3	22	538-5/8	240	5-408007	187	5-41455	81	5-447020	188
5255	114	538-7/8	240	540-805	83	5-416	186	5-447030	188
525-MT1	180	5-401	186	540-806	83	5-417	186	5-448007	189
525-PT1	180	5-401005	187	540-807	83	5-417005	188	5-449005	188
525-TORCH	180	540-1005L	84	540-808	83	5-417007	188	5-449007	188
5-300020	186	5-401007	187	540-811B	83	5-417010	188	5-449030	188
5-300030	186	5-401010	187	5-409	187	5-417012	188	5-450007	189
5-300050	186	5-401020	187	5-409005	188	5-417020	188	5-450015	189
5-300060	186	5-401025	187	5-409007	188	5-417025	188	5-450030	189
530-30752	184	5-401030	187	5-409010	188	5-417030	188	545-420	164
530-30753	184	5-402007	187	540-AK100	87	5-418	186	545-422	164
530-30755	184	540-2110C	79	540-BH1L	84	542-00966	162	545-424	164
530-30756	184	540-2114	84	540-BH1M	84	542-00968	162	545-426	164
530-30757	184	540-2144	84	540-CARABINER	175	542-25015	162	545-430	164
530-30818	184	540-2200	84	540-DB6	87	5-42272	80	545-440	164
530-30821	184	540-25G	169	540-DISP	79	542-76220	162	545-442	164
530-30834	184	540-278BM0024	173	540-FCTMC5	174	5-429005	188	545-460	164
530-30850	184	540-278HX0002	173	540-FCTMN1	174	5-429007	188	5-474007	190
530-30863	184	5-404	186	540-FCTMS1	174	5-429010	188	548-001	179
530-30876	184	540-400	171	540-FCTMS2	174	5-429012	188	548-003	180
530-30884	184	5-405	186	540-GUN	223	5-429015	188	548-005	180
530-30885	184	540-500	171	540-HU1L	84	5-429020	188	548-007	180
530-30890	184	540-506	169	540-HU1M	84	5-429030	188	548-009	180
530-30891	184	540-508	169	540-LG1M	84	5-435005	189	5-500	84
530-30893	184	540-509	169	540-P127D	174	5-435007	189	5-520	190
530-31132	184	540-572	223	540-P127S	174	5-435010	189	5557-3	22
530-31133	184	540-573	223	540-R8CCRF	173	5-435012	189	5-61	174
5-32	184	5-406005	187	540-RB125W	173	5-435020	189	56-72	140
5-321020	186	5-406007	187	540-RB414M	173	5-435030	189	56-72220	140
5-33570	81	5-406010	187	540-RB418M	173	5-435074	189	585-F336	153
5-34790	81	5-406020	187	540-RB424M	173	5-435101	189	585-TG	153
535-BB1	133	5-406030	187	540-RB610HDM	173	5-435102	189	585-TG1	153
535-BB2	133	5-406101	187	540-RB614HDM	173	5-436005	189	585-TG2	153
535-BB3	133	5-406130	187	540-RB618HDM	173	5-436007	189	585-TG3	153
535-BB4	133	5-406131	187	540-RB624HDM	173	5-436010	189	585-TG4	153
535-BB5	133	540-648	140	540-RB636DW	173	5-436020	189	585-TG5	153
535-BB6	133	540-6510L	174	540-RB636W	173	5-436030	189	585-TG6	153
5380AX	112	540-6510R	174	540-RB656WS	173	5-436074	189	585-TG7	153
5381	112	540-6716B	174	540-RB810HDM	173	5-436101	189	585-TG8	153
538-1/2	240	540-6716L	174	540-RB814HDM	173	5-436102	189	585-TG9	153
538-1/4	240	540-6716R	174	540-RB956W	173	5-436131	189	590-708	140
538-1-1/8	240	540-6716S	174	540-T50M	169	5-437101	189	5-91054	80
538-1-3/8	240	540-6900L	174	540-T50MOC	169	5-437130	189	5-HW5850	223
538-1-5/8	240	540-6900R	174	5-41	174	5-437131	189	5-IG5850	223
5382	112	5-407	186	5-410	187	5-437210	189	5-MSH1/4MC	171
538-2-1/8	240	5-407005	187	5-410005	188	5-437251	189	5-MSH5/16MC	171
538-2-5/8	240	5-407007	187	5-410007	188	5-437339	189	5-SCR101	88
5383	112	5-407015	187	5-410010	188	5-438101	189	5-SCR101-12DP	88
538-3/4	240	5-407020	187	5-41041	81	5-438130	189	5-SCR101-12DPBULK88	
538-3/8	240	5-407025	187	5-41043	81	5-438131	189	5-SCR101-2	88
538-3-1/8	240	5-407030	187	5-411	187	5-439131	188	5-SCR101-2BULK	88
538-3-5/8	240	5-407131	187	5-412	187	5-447005	188	5-SCR101-2DP	88

PART NUMBER INDEX cont'd

5-SCR101-2DPBULK..... 88	60206 99	6-12-4NM 134	620-14-2 137	620-600 148
5-SCR101BULK..... 88	6021 111	6-12-4NM4SWP 134	620-18-10 154	620-601 148
5-SCR101DP..... 88	60210 98	6-12-4NMP 134	620-18-12 154	620-602 148
5-SCR101DPBULK.... 88	60210CX 98	6-12-4NMR 134	620-18-2 154	620-603 148
5-SCR102DP..... 88	60210LX..... 98	6-12-4NMSWP 134	620-18-2P 154	620-604 148
5-SCR102DPBULK.... 88	60215 99	6-12-4P 134	620-18-3 154	620-605 148
5-SCR103-4 88	60219 96	6-12-4R 134	620-18-3P 154	620-606 148
5-SCR103-4BULK.... 88	60220 96	61252 99	620-18-4 154	620-608 145
5-SCR103-4DP 88	60220LX 96	61252NX 99	620-18-4P 154	620-6081 145
5-SCR103-4DPBULK. 88	60247 99	61255 99	620-18-5 154	620-6082 145
5-SCR61-2DP 88	60251 96	61255LX 99	620-18-5P 154	620-6083 145
5-SCR61-2DPBULK... 88	60251CX 96	61256LX 99	620-18-6 154	620-6-2 137
5-SCR63-8 88	60252CX 99	6-12-6 134	620-18-6P 154	620-700 148
5-SCR63-8BULK..... 88	60253LX 99	6-12-6NM 134	620-18-7 154	620-701 148
5-SCR71-2 88	60254 99	6-12-6NM4SWP 134	620-18-8 154	620-702 148
5-SCR71-2BULK..... 88	60254CX 99	6-12-6NMP 134	620-18-8P 154	620-703 148
5-SCR81 88	60254LX 99	6-12-6NMR 134	620-18-9 154	620-704 148
5-SCR81-12 88	60256 99	6-12-6NMSWP 134	6201MX 101	620-705 148
5-SCR81-12-100 88	60256CX 99	6-12-6P 134	620-200 149	6208 98
5-SCR81-12BULK.... 88	60259HX 97	6-12-6R 134	620-201 149	620-8-2 137
5-SCR81-12DP 88	60263BCX..... 107	61275CX 99	620-20-10 154	6208LX 98
5-SCR81-12DPBULK. 88	60263BLX 107	6-12-8NM4SWP 134	620-20134 149	6209 98
5-SCR81-12W 88	60263CX 107	6-12-8NMP 134	620-202 149	6209LX 98
5-SCR81-12WTBUL.. 88	60264BCX..... 107	6-12-8NMSWP 134	620-20-2 154	6210 98
5-SCR81-2 88	60264CX 107	6-12-8P 134	620-20-3 154	6211 98
5-SCR81-25M..... 88	60265BLX 107	6182 119	620-20-4 154	6211CX 98
5-SCR81-2BULK..... 88	60265LX 107	6183 119	620-20-5 154	6212 98
5-SCR81-2DP 88	60331B 115	6-1838L..... 74	620-20-6 154	6212CX 98
5-SCR81-2DPBULK... 88	60331BE..... 115	6-1838S 74	620-20-7 154	6213 96
5-SCR81BULK..... 88	60331R 115	6184 119	620-20-8 154	6213CX 96
5-SCR81DP 88	60331W 115	6-1846L..... 74	6-202-1 86	6214 96
5-SCR81DPBULK..... 88	6067-3 22	6-1846S 74	6-202-2 86	6214CX 96
5-SCR82 88	6-1 74	6185 119	620-252 149	6215 99
5-SCR82-100 88	6101 113	6186 119	620-253 149	6216 99
5-SCR82BULK 88	6102 113	6187 119	620-254 149	6216CX 99
5-SCR82DP 88	61028 228	6192 119	620-255 149	6216LX 99
5-SCR82DPBULK..... 88	6109 110	6193 119	620-274W 149	6217 98
5-SCR82W 88	6113 112	6194 119	6202MX 101	6217CX 98
5-SCR83-4 88	6115 112	6195X..... 119	620-300 148	6217LX 98
5-SCR83-4BULK..... 88	6-1200 31	6-2 74	620-301 148	6218 96
5-SCR83-4DP 88	61202 99	62000AX..... 107	620-303 148	6218CX 96
5-SCR83-4DPBULK... 88	61205 99	6200AX 101	620-304 148	6218LX 96
5-SCR-AK..... 87	61209 99	6200BSX..... 99	620-306 148	6219 96
5-SCRMS..... 87	61211 99	6200BSX..... 99	6203MX 101	6219LX 96
6000 113	61214 99	6200BSX..... 101	620-400 148	6220 96
6001 113	61215 99	6200BX 101	620-401 148	6220CX 96
6002 113	61221CX 96	6200CX 101	620-403 148	6221CX 96
6003 113	61221LX 96	6200DX 101	620-404 148	6222 98
6004 113	61223LX 96	6200HX 97	620-405 148	6222LX 98
6005 113	61233LX 97	6200HX 101	620-406 148	6223 98
6006 113	61234LX 96	6200MSX 101	620-408 148	62231 100
6007 113	61235LX 96	6200MX 101	620-409 148	62231XX..... 100
6011 112	61237 99	6200X 101	620-411 148	62232 100
60205 99	6-12-4 134	620-10-2 137	620-500 148	62232XX..... 100
60205CX 99	61245 99	620-12-2 137	620-502 148	6223LX 98

PART NUMBER INDEX cont'd

6224	96	625-1301W	148	625-IS5	137	626-4S	144	6292CX	120
6224CX	96	625-16-6	150	625-S13	149	6265BCX	107	6293	120
6226	99	625-16-690	150	625-S14	149	6265BLX	107	6293CX	120
6226CX	99	625-183	137	625-S15	149	626-5S	144	6294	120
6227	99	6251CX	96	625-S16	149	6266BLX	107	6294CX	120
6227LX	99	6251LX	96	625-S17	149	626-6S	144	6295X	120
6228	99	6252	99	625-S18	149	6267MX	107	6296	120
6228LX	99	625-2132B	149	625-S19	149	6268BL	107	6296CX	120
6229	96	625-2132V	149	625-S20	149	6268BMX	107	6298	120
6229LX	96	625-2132W	149	625-S21	149	6269	107	6298LX	120
6230	98	625-2134B	149	626-10S	144	6269CX	107	6-3	74
623-000	155	625-2134V	149	626-10T	144	6269LX	107	6-3030L	74
623-0007	155	625-2134W	149	626-15	144	6269MX	107	6-3050	31
623-001	155	625-2139W	149	626-15S	144	626-AT0003	145	6-3050L	74
623-002	155	625-270W	148	626-15T	144	626-AT0005	145	6-3050S	74
623-003	155	6252LX	99	6261BCX	107	626-HASR10	144	6-3060L	74
623-004	155	625-304	136	6261CX	107	626-HASR15	144	6-3060L-100	74
623-005	155	625-305	136	626-20	144	626-HASR20	144	6-3060S	74
623-006	155	6253CX	99	626-20S	144	626-HASR25	144	63070	119
623-008	155	6253LX	99	626-20T	144	626-HASR30	144	63076B	119
623-012	156	6254CX	99	626-23133	145	6270	97	63077B	119
623-013	156	6255	99	626-23233	145	6270LX	97	63079B	119
623-014	156	6255CX	99	626-23333	145	6272	99	6310X	113
6230CX	98	6255LX	99	626-25	144	6-2739L	74	6311	113
6231	98	6257	99	626-25S	144	6273LX	97	6312	113
6231CX	98	6257NX	99	626-25T	144	6274	99	6-320	178
6231LX	98	6258	97	626-26311	145	6-2748L	74	6321	113
6232	98	625-800	136	6-2626L	74	6-2748L-100	74	6-321	178
6232CX	98	625-801	136	6262BCX	107	6-2748S	74	6322	113
6232LX	98	625-810	136	6262BLX	107	6274LX	99	6-3263L	74
6233	96	625-811	136	6262BMX	107	6276	99	6-3263S	74
6233CX	96	6258CX	97	6262CX	107	6-2763L	74	6-330	76
6233LX	96	6259	97	6262LX	107	6-2763S	74	6330-4	116
6234	96	6259CX	97	6262MX	107	6276LX	99	6330-6	116
6234LX	96	625-AF10	31	626-30	144	6277	97	6331	116
6235	96	625-AF12	31	626-30S	144	6277NX	97	6332B	115
6235CX	96	625-AF14	31	626-30T	144	6281	96	6332G	115
6235LX	96	625-AF6	31	626-38071	145	6281LX	96	6332R	115
6236LX	99	625-AF8	31	626-38073	145	6282	96	6332W	115
6237	99	625-B1	150	626-38632	145	6282LX	96	6333B	115
6237LX	99	625-CR15W	148	626-38636	145	6283	97	6333G	115
6238	99	625-CR20W	148	6263BCX	107	6283LX	97	6333R	115
6238	99	625-CS120W	148	6263BDX	107	6285	97	6333W	115
6238LX	99	625-GD100	149	6263BLX	107	6285LX	97	6334B	115
6239	99	625-GD15H	149	6263BNX	107	6286	97	6334G	115
6239LX	99	625-GD20H	149	6263CX	107	6287	98	6334R	115
623-MIX	155	625-GD30H	149	6263DX	107	6287NX	98	6334W	115
6241	98	625-GD40H	149	6263LX	107	6287XX	98	6335B	115
6242	98	625-GD50H	149	6263NX	107	6288	97	6335G	115
6-2424L	74	625-GD60H	149	626-3S	144	6288LX	97	6335R	115
6242LX	98	625-GS15H	149	6264BCX	107	6289	97	6335W	115
6244	98	625-GS20H	149	6264BLX	107	6289LX	97	6336	116
6244LX	98	625-GS30H	149	6264BMX	107	6291	120	6337	116
6251	96	625-GS40H	149	6264CX	107	6291CX	120	6338	116
625-1225	150	625-GS50H	149	6264LX	107	6292	120	6339	116

PART NUMBER INDEX cont'd

6339XL.....	116	640-FD2S.....	36	660-005.....	173	6900AX.....	111	6-T118.....	180
6340.....	116	640-FD3B.....	36	6601.....	110	6-9011.....	31	6-T1191.....	179
6341.....	116	640-FD3S.....	36	6602.....	110	6943CX.....	111	6-T1191BG.....	179
6342.....	116	640-FSK2.....	36	6603.....	110	6945CX.....	111	6-T133.....	179
6343.....	116	640-FSK3.....	36	6622.....	110	6946CX.....	111	6-T135.....	179
6-34-3NM.....	134	640-UL25.....	36	6623.....	110	6953CX.....	111	6-T147.....	164
6-34-4.....	134	640-UL3.....	36	6641.....	110	6955CX.....	111	6-T152.....	179
6-34-4NM.....	134	6411.....	110	6642.....	110	6956CX.....	111	6-T21.....	167
6-34-4NMR.....	134	641-14.....	220	6643.....	110	6-9718.....	76	6-T396.....	172
6-34-4R.....	134	6412.....	110	6644.....	110	6-CT700F.....	176	6-T482.....	180
6-34-6.....	134	6413.....	110	6645.....	110	6-DAMP221.....	169	6-T482A.....	180
6-3460.....	150	6414.....	110	6685.....	110	6-DCFM8906.....	168	6-T582.....	172
6-34-6NM.....	134	6415.....	110	6700AX.....	110	6-DMM20UL.....	169	6-T744.....	173
6-34-6R.....	134	6416.....	110	6701.....	110	6-DMM45.....	170	6-T84101.....	173
6-34-8.....	134	6-5.....	74	6702.....	110	6-DT8803.....	177	6-T86014.....	168
6-34-8NM.....	134	650-001.....	32	6703.....	110	6-DT898P.....	178	6-TL100.....	176
6360B.....	115	650-002.....	32	6704.....	110	6-FT80H.....	178	6-TL360W.....	176
6360R.....	115	650-003.....	32	6704-2X.....	110	6-FT80R.....	178	701-001.....	182
6360W.....	115	650-004.....	32	6706.....	110	6-GPK035.....	168	701-002.....	182
6361B.....	116	650-005.....	32	6706-2X.....	110	6-HAB-BG.....	26	701-003.....	182
6361R.....	116	650-006.....	32	6-7090.....	31	6-HDT303K.....	177	701-004.....	182
6361W.....	116	650-008.....	33	6722.....	110	6-HG15.....	168	701-005.....	182
6362B.....	116	650-010.....	33	6722-2X.....	110	6-HK2748.....	74	701-006.....	182
6362R.....	116	650-011.....	32	6724.....	110	6-HK2748-1.....	74	701-007.....	182
6362W.....	116	650-012.....	32	6724-2X.....	110	6-HK2748-SAM.....	248	701-008.....	182
6-3636L.....	74	650-013.....	32	6730.....	110	6-HK2766.....	74	701-009.....	182
6363B.....	116	650-014.....	33	6731.....	110	6-HK2766-1.....	74	701-010.....	182
6363R.....	116	650-015.....	33	6732.....	110	6-HK3050.....	74	701-011.....	182
6363W.....	116	650-016.....	33	6733.....	110	6-HK3050-1.....	74	701-012.....	182
6364B.....	116	650-017.....	33	6-733.....	76	6-HK3050HD.....	74	701-013.....	182
6364R.....	116	650-020.....	33	6-734.....	76	6-HK3060.....	74	701-014.....	182
6364W.....	116	650-021.....	32	6-735.....	76	6-HK3060-1.....	74	701-015.....	182
6365B.....	116	650-023.....	32	6-736.....	76	6-HK3060HD.....	74	701-017.....	182
6365R.....	116	650-031.....	32	675-P521U.....	153	6-HK3070HD.....	74	701-018.....	183
6-3660L.....	74	650-036.....	33	675-P621U.....	153	6-HK3364FUR.....	74	701-019.....	183
6-3660S.....	74	650-038.....	32	675-P721UT.....	153	6-HK3378FUR.....	74	701-020.....	183
6370.....	119	650-074.....	32	675-P722U.....	153	6-IRT203.....	177	701-023.....	183
6371.....	119	6500A.....	109	675-PSD010BF.....	153	6-IRT670.....	177	701-024.....	183
6383-325.....	116	6501.....	109	675-PSD111.....	153	6-M2748.....	74	701-025.....	183
6383-35.....	116	650-100.....	31	675-PSDH121.....	153	6-M2763.....	74	701-026.....	183
6384-325.....	116	6501CX.....	109	675-PSM30SA.....	153	6-M3030.....	74	701-028.....	183
6384-35.....	116	6502.....	109	675-PSM40SA.....	153	6-M3030L-SAM.....	248	701-029.....	183
6401.....	110	650-200.....	31	675-PSP722E.....	153	6-M3030-SAM.....	248	701-030.....	183
640-122.....	136	6503.....	109	6800HX.....	111	6-M3050.....	74	701-031.....	183
640-122.....	136	650-300.....	31	6845.....	111	6-M3060.....	74	701-032.....	183
640-142.....	136	6503CX.....	109	6845DX.....	111	6-M3263.....	74	701-033.....	183
640-142.....	136	6505.....	109	6853.....	111	6-OT550.....	178	701-034.....	183
6402.....	110	6505LX.....	109	6855.....	111	6-PT300M.....	178	701-035.....	183
6403.....	110	6-5070.....	31	6858.....	111	6-PTH8708.....	178	701-036.....	183
6404.....	110	6515.....	112	6859.....	111	6-R50A.....	31	701-037.....	183
640-845.....	137	6526.....	109	6865.....	111	6-REF401.....	172	701-038.....	183
640-AF2.....	36	6528.....	109	6866.....	111	6-RLD202.....	169	701-039.....	183
640-AF25.....	36	660-002.....	173	6868.....	111	6-RLD382P.....	169	701-040.....	183
640-AF3.....	36	660-003.....	173	6876.....	111	6-SAM990DW.....	177	701-041.....	182
640-FD2B.....	36	660-004.....	173	6878.....	111	6-ST600LED.....	176	701-042.....	182

PART NUMBER INDEX cont'd

701-043	182	7-1234	245	741-002	82	7-78	75	7-ECC50730	165
701-046	183	7-1238	245	7-4101	86	7-78P	75	7-ECC50735	165
701-047	183	7-1258	245	7-4200	86	7-806	79	7-I6V-B2	166
701-053	182	7-1278	245	7-4300	86	7-80632	85	7-ILJ2AA-B	166
701-055	183	7-12P	75	7-4400	86	7-80633	85	7-IN2	166
7033	109	7-14	75	7-4500	86	7-918	79	7-IN2K	166
7034	109	7142	102	750-10100	136	7-944	79	7-ISL2D-B	166
7036X	109	7142LX	102	750-114100	136	799-001	83	7-LK3A001	167
7066X	109	7146	102	750-12100	136	799-002	83	7-LM2A001	167
708-850	140	7-14P	75	750-12100BOX	136	799-003	83	7-LUX2AA3W-B	166
7-10	75	7-200	86	750-15100	136	799-004	83	7-LWSA301	167
7-100	86	7233RLX	102	750-2050	136	799-005	83	7-LWSA401	167
710-001	34	7234RLX	102	750-30F-3PH	135	799-006	83	7-M2A016	167
710-002	34	7235RLX	102	750-34100	136	799-008	83	7-M2A026	167
710-003	34	7236RLX	102	750-38100	136	799-009	83	7-M2A036	167
710-004	34	72-88220	140	750-401	191	799-010	83	7-M3A016	167
710-005	34	72-88330	140	750-402	191	799-011	83	7-R2AA-B	166
7-100W	165	7-301K	166	750-500	136	799-012	83	7-R2D	166
710-100	34	7302	102	750-600	136	799-013	83	7-R3D	166
710-101	34	7303	102	750-60F-3PH	135	799-020	83	7-S2C016	167
710-102	34	7311L	102	750-60NF-3PH	135	799-021	83	7-S2D016	167
710-103	34	7-316	75	750-MLT50	136	799-022	83	7-S3D016	167
710-182G	34	7316L	102	750-MLT75	136	799-024	83	7-S4C016	167
710-185G	34	7316X	102	750-MLT9050	136	799-025	83	7-S4D016	167
7101CX	103	7317L	102	750-MLT9075	136	799-040	83	7-SE4W3C	166
7101HCX	103	7317X	102	750-NMLT100	136	799-041	83	7-SPHW3AAA-BX	166
7102CX	103	7321X	102	750-NMLT150	136	7-AD010000	165	7-TLC10625	165
7102HCX	103	7-34	75	750-NMLT4550	136	7-AL9V	79	7-TLC10630	165
7103CX	103	7-341-18	245	750-NMLT4575	136	7-AL9V-8	79	800-008	86
7105LX	103	7-3412	245	750-NMLT50	136	7-ALAA	79	800-009	86
7106	103	7-341-58	245	750-NMLT75	136	7-ALAA-24	79	8200M	113
7106CX	103	7-342-18	245	750-NMLT90100	136	7-ALAAA	79	8201	114
7-1078	245	7-342-58	245	750-NMLT90150	136	7-ALAAA-18	79	8201C	114
710-A16100	33	7-3434	245	750-NMLT9050	136	7-ALC	79	8202	114
710-A1650	33	7-3438	245	750-NMLT9075	136	7-ALC-12	79	8203	114
710-A1710	33	7-3458	245	750-P6ONF	135	7-ALD	79	8203C	114
7-10KOTN30	144	7-3478	245	750-RC841	136	7-ALD-12	79	8207	114
7-10KOTN35	144	7-34P	75	750-RC842	136	7-AM2A056	167	8207	114
7-10KOTN40	144	7-38	75	750-SLTC50	137	7-CRNR15	144	8220M	113
7-10KOTN45	144	7-381-18	245	750-SLTC75	137	7-CRNR20	144	8233	113
7-10KOTN50	144	7-3812	245	750-SLTC9050	137	7-CRNR25	144	8282LX	120
7-10KOTN60	144	7-381-38	245	750-SLTC9075	137	7-CRNR30	144	8284	120
7-10P	75	7-381-58	245	7-58	75	7-CRNR35	144	8284CX-B	120
710-P100	34	7-382-18	245	7-5811	156	7-CRNR40	144	8286	120
7111HCX	103	7-382-58	245	7-5811-B	156	7-CRNR45	144	8286CX-B	120
7111X	103	7-383-18	245	7-58P	75	7-CRNR50	144	829-995	140
711CX	103	7-3834	245	7-60	26	7-CRNR60	144	88-108	140
7-12	75	7-3838	245	7-64	26	7-CVMINITUBE	75	88-108220	140
7-121-18	245	7-3858	245	7-6VGP	79	7-ECC12100	165	88-108330	140
7-1212	245	7-3878	245	7-6VHD	79	7-ECC1225	165	8-FWH16	88
7-121-38	245	7-38P	75	7-6VHDM	79	7-ECC1250	165	8-WH16	88
7-121-58	245	7-4000	86	770-15	78	7-ECC16100	165	900-3	41
7-122-18	245	7-4001	86	7-711	156	7-ECC1625	165	900-4	41
7-122-58	245	7-4100	86	7-711-B	156	7-ECC1650	165	900-5	41
7-123-18	245	741-001	82	7-75W	165	7-ECC50725	165	900-6	41

PART NUMBER INDEX cont'd

91-2032	43	AFR1520-1	35	B-210.....	163	B-710.....	163	BPF-23.....	45
91-3042	43	AFR1620-1	35	B-213.....	163	B-713.....	163	BPF-24.....	45
92-3232	43	AFR1625-1	35	B-216.....	163	B-716.....	163	BPF-25.....	45
92-4242	43	AFR1824-1	35	B-219.....	163	B-719.....	163	BPF-26.....	45
A60306K.....	133	AFR1825-1	35	B-222.....	163	B-722.....	163	BPF-27.....	45
ACB-30.....	27	AFR2020-1	35	B-228.....	163	B-728.....	163	BPF-28.....	45
ACB-36.....	27	AFR2024-1	35	B-233.....	163	B-733.....	163	BPF-29.....	45
ACB-42.....	27	AFR2025-1	35	B-24H	190	B-802.....	163	BPF-30.....	45
ACB-48.....	27	AFR2030-1	35	B-26.....	163	B-807.....	163	BPF-31.....	45
ACID-ELIM	229	AFR2525-1	35	B-27.....	161	B-810.....	163	BPF-32.....	45
ACK4.....	176	AFR-CUSTOM-1	35	B-28H	190	B-813.....	163	BPF-33.....	45
ACP-10.....	78	AFR-CUSTOM-2	35	B-302.....	163	B-816.....	163	BPF-34.....	45
ACP24242.....	24	AG-25	86	B-304.....	163	B-819.....	163	BPN-1	44
ACP24243.....	24	ALK150-01	227	B-307.....	163	B-8H	190	BPN-10	44
ACP24362.....	24	ALK150-05	227	B-310.....	163	B-924.....	162	BPN-11	44
ACP30302.....	24	ALK200-01	227	B-313.....	163	B-925.....	162	BPN-12	44
ACP30303.....	24	ALK300-01	227	B-316.....	163	B-926.....	162	BPN-13	44
ACP32322.....	24	ALK300-05	227	B-319.....	163	B-927.....	162	BPN-14	44
ACP32323.....	24	AP-DD	74	B-322.....	163	B-928.....	162	BPN-15	44
ACP32442.....	24	AP-DK.....	74	B-328.....	163	B-929.....	162	BPN-16	44
ACP36362.....	24	AT-1700	150	B-32H	190	B-930.....	162	BPN-17	44
ACP36363.....	24	ATK-1	227	B-333.....	163	B-931.....	162	BPN-18	44
ACP36483.....	24	ATK-1P.....	227	B-36H	190	B-932.....	162	BPN-19	44
ACP38422.....	24	ATK-4	227	B-4.....	161	B-934.....	162	BPN-2	44
ACR-1.....	26	AW-712.....	161	B-407.....	163	B-935.....	162	BPN-20	44
ACT-6	170	AW-712-10.....	161	B-422.....	163	B-996.....	162	BPN-21	44
ADB-1	145	AW-712-8.....	161	B-428.....	163	B-998.....	162	BPN-22	44
ADB-2	145	AW-8.....	161	B-433.....	163	BE-24.....	163	BPN-23	44
ADM-1.....	145	AW-9.....	161	B-4H	190	BE-36.....	163	BPN-24	44
ADM-2.....	145	AW-96.....	161	B-501.....	161	BE-48.....	163	BPN-25	44
AER-8.....	26	AW-96-10.....	161	B-502.....	161	BH-1	163	BPN-26	44
AER-8BL	26	AW-96-8.....	161	B-503.....	161	BNT-1	224	BPN-27	44
AFB1212-1	35	AWL-5	161	B-504.....	161	BNT-32	224	BPN-28	44
AFB1220-1	35	AWL-9	161	B-505.....	161	BPF-01	44	BPN-29	44
AFB1224-1	35	AWZ-2500.....	161	B-602.....	163	BPF-02	44	BPN-3	44
AFB1420-1	35	AWZ-3000.....	161	B-604.....	163	BPF-03	44	BPN-30	44
AFB1424-1	35	B-1.....	161	B-607.....	163	BPF-04	44	BPN-31	44
AFB1425-1	35	B-10.....	163	B-610.....	163	BPF-05	44	BPN-32	44
AFB1520-1	35	B-10H	190	B6-12-4	134	BPF-06	44	BPN-33	44
AFB1624-1	35	B-124.....	162	B6-12-4NM	134	BPF-07	44	BPN-34	44
AFB1625-1	35	B-125.....	162	B6-12-6	134	BPF-08	44	BPN-35	44
AFB1818-1	35	B-126.....	162	B6-12-6NM	134	BPF-09	44	BPN-37	44
AFB2024-1	35	B-127.....	162	B-613.....	163	BPF-10	44	BPN-38	44
AFB2025-1	35	B-128.....	162	B-616.....	163	BPF-11	44	BPN-39	44
AFB2030-1	35	B-129.....	162	B-619.....	163	BPF-12	44	BPN-4	44
AFB2424-1	35	B-12H	190	B-622.....	163	BPF-13	45	BPN-40	44
AFB2525-1	35	B-130.....	162	B-628.....	163	BPF-14	45	BPN-41	44
AFB-CUSTOM-1	35	B-131.....	162	B-633.....	163	BPF-15	45	BPN-42	44
AFB-CUSTOM-2	35	B-132.....	162	B6-34-4NM	134	BPF-16	45	BPN-43	44
AFR1220-1	35	B-16H	190	B6-34-6	134	BPF-17	45	BPN-44	44
AFR1224-1	35	B-2.....	161	B6-34-6NM	134	BPF-18	45	BPN-45	44
AFR1420-1	35	B-202.....	163	B-6H	190	BPF-19	45	BPN-46	44
AFR1424-1	35	B-204.....	163	B-702.....	163	BPF-20	45	BPN-47	44
AFR1425-1	35	B-207.....	163	B-704.....	163	BPF-21	45	BPN-48	44
AFR1430-1	35	B-20H	190	B-707.....	163	BPF-22	45	BPN-49	44

PART NUMBER INDEX cont'd

BPN-5	44	C165-0025	233	C242-0150	233	C410-0223	234	C460-0413	235
BPN-50	44	C165-0032	234	C242-0215	233	C410-0224	234	C460-0414	235
BPN-51	44	C165-0050	233	C242-0295	233	C410-0305	234	C460-0415	235
BPN-52	44	C165-0058	234	C242-0390	233	C410-0306	234	C460-0416	235
BPN-53	44	C165-0090	233	C243	156	C410-0398	234	C460-0417	235
BPN-54	44	C165-0093	234	C245	156	C410-0400	234	C460-0418	235
BPN-6	44	C165-0094	234	C247	156	C410-0401	234	C460-0429	235
BPN-7	44	C165-0100	233	C2-5	160	C410-1498	234	C460-0430	235
BPN-8	44	C165-0107	234	C254-0002	233	C460-0002	235	C460-0431	235
BPN-9	44	C165-0149	234	C254-0050	233	C460-0025	235	C460-0432	235
BPN-A1	44	C165-0150	233	C254-0090	233	C460-0050	235	C460-0433	235
BPN-A12	44	C165-0159	234	C254-0100	233	C460-0058	235	C460-0444	235
BPN-A34	44	C165-0215	233	C254-0150	233	C460-0090	235	C460-0447	235
BS-16	223	C165-0222	234	C254-0215	233	C460-0100	235	C460-0457	235
BS-25	74	C165-0223	234	C254-0390	233	C460-0107	235	C460-0470	235
BS-32	223	C165-0224	234	C2-5S	160	C460-0117	235	C5	160
BS-64	223	C165-0295	233	C272-0002	232	C460-0118	235	C512	156
C10	160	C165-0304	234	C272-0025	232	C460-0150	235	C512L	156
C101-0050	232	C165-0305	234	C272-0050	232	C460-0159	235	C533-0050	235
C101-0100	232	C165-0306	234	C272-0090	232	C460-0160	235	C533-0150	235
C101-0150	232	C165-0390	233	C272-0100	232	C460-0181	235	C533-0215	235
C101-0222	232	C165-0398	234	C272-0150	232	C460-0182	235	C533-0295	235
C101-0295	232	C165-0399	234	C272-0215	232	C460-0215	235	C533-0390	235
C105-0050	232	C165-0400	234	C272-0295	232	C460-0222	235	C657-0100	234
C105-0057	232	C165-0401	234	C290-0002	233	C460-0223	235	C947-0025	235
C105-0100	232	C165-0402	234	C290-0025	233	C460-0235	235	C947-0050	235
C105-0107	232	C165-1498	234	C290-0050	233	C460-0236	235	C947-0090	235
C105-0150	232	C170-0003	235	C290-0090	233	C460-0237	235	C947-0100	235
C105-0159	232	C172-0050	235	C290-0100	233	C460-0245	235	C947-0150	235
C105-0215	232	C172-0090	235	C290-0150	233	C460-0247	235	C947-0215	235
C105-0295	232	C172-0100	235	C290-0215	233	C460-0248	235	C947-0295	235
C105-0390	232	C172-0150	235	C290-0295	233	C460-0256	235	C947-0390	235
C114-0050	232	C172-0215	235	C290-0390	233	C460-0295	235	CA-252C	160
C114-0100	232	C20	160	C295-0002	233	C460-0303	235	CAS-2712	85
C114-0150	232	C20-D	160	C295-0025	233	C460-0304	235	CB-03	74
C114-0215	232	C222	156	C295-0050	233	C460-0305	235	CB-2	72
C114-0295	232	C222C	156	C295-0090	233	C460-0315	235	CC-1	71
C114-0390	232	C223	156	C295-0100	233	C460-0317	235	CC33	151
C115-0050	232	C223C	156	C295-0150	233	C460-0318	235	CC33-18	151
C115-0100	232	C235-0002	232	C295-0215	233	C460-0319	235	CC33-24	151
C115-0150	232	C235-0025	232	C295-0295	233	C460-0329	235	CD-9000-B	42
C115-0215	232	C235-0050	232	C295-0390	233	C460-0330	235	CD-9775-C	42
C115-0295	232	C235-0090	232	C312	156	C460-0331	235	CG-AER	219
C115-0390	232	C235-0100	232	C312L	156	C460-0332	235	CGB-AER	219
C1-2-6	160	C235-0150	232	C410-0007	234	C460-0339	235	CH-100	147
C142-0058	234	C235-0215	232	C410-0032	234	C460-0340	235	CH-100-3	147
C154-0002	234	C235-0295	232	C410-0058	234	C460-0341	235	CH-101	147
C154-0050	234	C241	156	C410-0059	234	C460-0342	235	CH-101-2	147
C154-0090	234	C242-0001	233	C410-0093	234	C460-0343	235	CH-101-3	147
C154-0100	234	C242-0002	233	C410-0107	234	C460-0390	235	CH-102	147
C154-0215	234	C242-0015	233	C410-0149	234	C460-0398	235	CH-102-2	147
C154-0295	234	C242-0025	233	C410-0159	234	C460-0399	235	CH-103	147
C165-0001	233	C242-0050	233	C410-0160	234	C460-0400	235	CH-103-2	147
C165-0002	233	C242-0090	233	C410-0161	234	C460-0401	235	CH-104	147
C165-0007	234	C242-0100	233	C410-0222	234	C460-0402	235	CH-104-3	147

PART NUMBER INDEX cont'd

CH-105..... 147	CT-475M 160	D61220250 243	D90-360 143	DE1-4B 238
CH-135..... 147	CT800..... 176	D61220350 243	D90-362 143	DE15 109
CH-135-2 147	CVENTCAP2..... 41	D61220500 243	D90-364 143	DE1-6B 238
CH-196..... 147	CVENTCAP3..... 41	D61230250 243	D90-370 143	DE1-6C 238
CH-196-2 147	CVENT-2AB 41	D61230350 243	D90-372 143	DE1-6D 238
CH-196-3 147	CVENT-2 41	D61230500 243	D90-374 143	DE1-8D 238
CH-197 147	CVENT-2CA 41	D61280250 243	D90-380 143	DE1-8E 238
CH-202-3 147	CVENT-3 41	D61280350 243	D90-382 143	DE23 109
CH-230 147	CVENT-3CA 41	D61280500 243	D90-384 143	DE24 109
CH-230-3 147	CVMINI 70	D61420250 243	DA2V02 142	DE33 109
CH-230-6 147	CV-PTRAP 72	D61420350 243	DA2V06 142	DEP052 85
CH-280 147	CV-RTRAP 72	D61420500 243	DA2V09 142	DEP8001 85
CK-141 74	CV-TUBE 72	D61430500 243	DA2V14 142	DEP8002 85
CLL-1 228	CW-15 74	D61480250 243	DA3V02 142	DF-75..... 74
CLL-4 228	CW-30 160	D61480350 243	DA3V06 142	DMB-1 133
CO-1 82	D10 142	D61480500 243	DA3V09 142	DMB-2 133
COOLWELD-32 219	D11 142	D61820250 243	DAD032 241	DMB-3 133
CP-16 70	D20-3132-18 42	D61820350 243	DAD032S 241	DN1-10 239
CP-16-230 70	D20-3132-24 42	D61820500 243	DAD052 241	DN1-12 239
CP-22 70	D20-3132-36 42	D61880250 243	DAD052S 241	DN1-14 239
CP-22-230 70	D20-3132-48 42	D61880350 243	DAD053S 241	DN1-3 239
CP-22-230T 70	D30-3131-24 42	D61880500 243	DAD082 241	DN1-4 239
CP-22LP 70	D30-3131-36 42	D61A-10 238	DAD082S 241	DN1-6 239
CP-22LP-230 70	D30-3131-48 42	D61A-4 238	DAD083S 241	DN5-4 239
CP-22T 70	D30-3132-18 42	D61A-8 238	DAD084S 241	DN5-6 239
CP-CV 70	D30-3132-24 42	D62A-1010 238	DAD163 241	DNS4-10 239
CP-CVCF 70	D30-3132-36 42	D62A-44 238	DAD163S 241	DNS4-12 239
CPN1 156	D30-3132-48 42	D62A-66 238	DAD164S 241	DNS4-14 239
CPN1C 156	D40620250B3B6 .. 243	D62A-88 238	DAD303 241	DNS4-4 239
CPN2 156	D40620350B3B6 .. 243	D64A-1010 238	DAD303S 241	DNS4-6 239
CPN2C 156	D40620500B3B6 .. 243	D64A-44 238	DAD304S 241	DNS4-8 239
CPN3 156	D40680250B3B6 .. 243	D64A-66 238	DAD305 241	DP-1 160
CPN3C 156	D40680350B3B6 .. 243	D64A-88 238	DAD305S 241	DP2-10 239
CRO70 175	D40680500B3B6 .. 243	D68A-4B 238	DBF083 242	DP2-4 239
CRC-1 82	D40820250B3B6 .. 243	D68A-6B 238	DBF083S 242	DP252120 141
CRC-13 82	D40820350B3B6 .. 243	D68A-6C 238	DBF084 242	DP25224 141
CRC-1KB 81	D40820500B3B6 .. 243	D68A-6D 238	DBF084S 242	DP252240 141
CRC-2 82	D40880250B3B6 .. 243	D68A-8D 238	DBF163 242	DP2-6 239
CRC-3 82	D40880350B3B6 .. 243	D69A-4A 238	DBF163S 242	DP2-8 239
CRC-4-140 79	D40880500B3B6 .. 243	D69A-4B 238	DBF164S 242	DP301120 141
CRC-4CF 79	D41020250B3B6 .. 243	D69A-6B 238	DBF165S 242	DP30124 141
CRC-4NU 80	D41020350B3B6 .. 243	D69A-6C 238	DC-1428 80	DP301240 141
CRC-5 82	D41020500B3B6 .. 243	D69A-6D 238	DC30-3132-18 42	DP302120 141
CRC-6 82	D41080250B3B6 .. 243	D69A-8D 238	DC30-3132-24 42	DP30224 141
CRC-7-140 80	D41080350B3B6 .. 243	D-90113 143	DC30-3132-36 42	DP302240 141
CRC-7PS 80	D41080500B3B6 .. 243	D-90118 143	DC30-3132-48 42	DP303120 141
CRC-7X 80	D60A-10 238	D90-290Q 143	DC-9128 80	DP30324 141
CRC-7Z 80	D60A-4 238	D90-291Q 143	DD11 142	DP303240 141
CRC-8 81	D60A-8 238	D90-292Q 143	DDS-30 135	DP304120 141
CRC-9 82	D61020250B3B6 .. 243	D90-293Q 143	DDS-60 135	DP30424 141
CRC-CF2 82	D61020350B3B6 .. 243	D90-294Q 143	DDS-60U 135	DP304240 141
CS-1 71	D61020500B3B6 .. 243	D90-295Q 143	DE1-10D 238	DP304277 141
CS1200 71	D61080250B3B6 .. 243	D-90340 143	DE1-12E 238	DP402120 141
CS-2 71	D61080350B3B6 .. 243	D-90341 143	DE13 109	DP40224 141
CS-3 71	D61080500B3B6 .. 243	D-90342 143	DE14 109	DP402240 141

PART NUMBER INDEX cont'd

DP403120..... 141	DTK210..... 72	EC40324..... 141	ED877..... 118	EP1838-3..... 25
DP40324..... 141	DTP-3..... 146	EC403240..... 141	ED9726..... 118	EP2424-2..... 25
DP403240..... 141	DTT-10..... 81	EC-56..... 170	ED-AT3..... 115	EP2424-3..... 25
DP404120..... 141	DTT-24..... 81	EC-810..... 170	ED-AT5..... 115	EP2436-2..... 25
DP40424..... 141	DU1-10D..... 239	ECO-COIL..... 218	ED-CR15..... 115	EP3030-2..... 25
DP404240..... 141	DU1-10E..... 239	ECO-COIL-32..... 218	ED-CR20..... 115	EP3030-3..... 25
DP404277..... 141	DU1-12D..... 239	ECO-COIL-5..... 218	ED-CR25..... 115	EP3232-2..... 25
DP503120..... 141	DU1-4A..... 239	ECO-COIL-55..... 218	ED-CR30..... 115	EP3232-3..... 25
DP50324..... 141	DU1-4B..... 239	ED1232..... 118	ED-CR35..... 115	EP3244-2..... 25
DP503240..... 141	DU1-6B..... 239	ED1238..... 118	ED-CR40..... 115	EP3244-3..... 25
DP603120..... 141	DU1-6C..... 239	ED1240-2..... 118	ED-CR45..... 115	EP3636-2..... 25
DP60324..... 141	DU1-6D..... 239	ED1262-2..... 118	ED-CR50..... 115	EP3636-3..... 25
DP603240..... 141	DU1-6E..... 239	ED1262-2I..... 118	ED-CR60..... 115	EP3648-3..... 25
DP753120..... 141	DU1-8B..... 239	ED1301..... 118	EDS-60U..... 135	EP3842-2..... 25
DP75324..... 141	DU1-8D..... 239	ED1301-I..... 118	EG..... 221	EP3842-3..... 25
DP753240..... 141	DU1-8E..... 239	ED1703..... 116	EG-5..... 221	EP4040-3..... 25
DP903120..... 141	DU2-10..... 239	ED1709..... 116	EG-55..... 221	ET130C1..... 150
DP90324..... 141	DU2-12..... 239	ED1711..... 117	EH-1..... 170	ET22..... 150
DP903240..... 141	DU2-14..... 239	ED179..... 116	EL1838-3..... 21	ET33..... 150
DPR063..... 143	DU2-4..... 239	ED1876..... 118	EL2424-2..... 21	ET35G..... 150
DPR064..... 143	DU2-6..... 239	ED1876-I..... 118	EL2424-3..... 21	ET35N..... 150
DPR065..... 143	DU2-8..... 239	ED1877..... 118	EL2430-2..... 21	ET35R..... 150
DPR066..... 143	DU3-10D..... 240	ED252..... 117	EL2430-3..... 21	ET35W..... 150
DPR067..... 143	DU3-10E..... 240	ED270..... 118	EL2436-2..... 21	ET44..... 150
DPR068..... 143	DU3-6C..... 240	ED270-I..... 118	EL2436-3..... 21	ET75..... 73
DPR069..... 143	DU3-6D..... 240	ED273..... 108	EL2626-2..... 21	ET75-KIT..... 73
DPSG-2..... 242	DU3-8D..... 240	ED273CX..... 108	EL3030-2..... 21	FA-01..... 74
DPSG-2MF..... 242	DUCT-FRESH-16..... 224	ED277..... 118	EL3030-3..... 21	FA-02..... 74
DPSG-2S..... 242	DUCT-FRESH-32..... 224	ED277-I..... 118	EL3036-2..... 21	FA-03..... 74
DPSG-3..... 242	DUCT-FRESH-48..... 224	ED2867..... 117	EL3040-2..... 21	FAK-10..... 84
DPSG-3MF..... 242	DUCT-FRESH-8..... 224	ED2887..... 117	EL3040-3..... 21	FAK-25..... 84
DPSG-3S..... 242	DUS4-4..... 240	ED320..... 119	EL3232-2..... 21	FB-1..... 26
DPSG-4..... 242	DUS4-6..... 240	ED406..... 108	EL3232-3..... 21	FC-73..... 40
DPSG-4MF..... 242	DUS4-8..... 240	ED419..... 117	EL3238-2..... 21	FC-74..... 40
DPSG-5..... 242	DX-3..... 241	ED4409..... 117	EL3238-3..... 21	FC-82..... 40
DPSG-5MF..... 242	DX-4..... 241	ED447..... 118	EL3244-2..... 21	FC-87..... 41
D-SCALE..... 227	DXA-5..... 241	ED4509..... 117	EL3244-3..... 21	FF-1000-S..... 201
DSL13-5SVHH..... 241	E-10..... 170	ED453..... 118	EL3434-2..... 21	FF-250-S..... 201
DSL13-6SVHH..... 241	E-5..... 170	ED454..... 118	EL3636-2..... 21	FF-250-UNI..... 201
DSL13-7SVHH..... 241	E-6..... 170	ED455..... 118	EL3636-3..... 21	FF-400-S..... 201
DSL13-9SVHH..... 241	E-8..... 170	ED468..... 118	EL3640-2..... 21	FF-600-S..... 201
DSL13-11SVHH..... 241	EB-10..... 170	ED4867..... 117	EL3640-3..... 21	FH-1..... 145
DSP-1..... 146	EB-6..... 170	ED494..... 118	EL3648-2..... 21	FLOW-PLUS-10..... 225
DSS-SLD306SV..... 241	EB-8..... 170	ED5225..... 118	EL3648-3..... 21	FLOW-PLUS-125..... 225
DSS-SLD307SV..... 241	EC-1..... 31	ED600..... 120	EL3842-2..... 21	FLOW-PLUS-200..... 225
DST-5..... 140	EC302120..... 141	ED601..... 120	EL3842-3..... 21	FLOW-PLUS-25..... 225
DST-6..... 140	EC30224..... 141	ED602..... 120	EL3870-3..... 21	FLOW-PLUS-6..... 225
DT2-10..... 239	EC302240..... 141	ED603..... 120	EL4040-3..... 21	FMO450..... 33
DT2-4..... 239	EC303120..... 141	ED610..... 120	EL4558-3..... 21	FRESH-COIL..... 219
DT2-6..... 239	EC30324..... 141	ED611..... 120	EL4848-3..... 21	FRL12..... 243
DT2-8..... 239	EC303240..... 141	ED612..... 120	EL4872-3..... 21	FRL14..... 243
DTK113..... 72	EC402120..... 141	ED613..... 120	EL5252-3..... 21	FRL38..... 243
DTK113B..... 72	EC40224..... 141	ED620..... 120	EL5658-3..... 21	FRL58..... 243
DTK205..... 72	EC402240..... 141	ED621..... 120	EM480..... 119	FTL3..... 176
DTK207..... 72	EC403120..... 141	ED710..... 120	EM484..... 119	FTL3D..... 176

PART NUMBER INDEX cont'd

FULO425..... 33	HC-04..... 41	HP3232-8..... 25	IGN-402..... 40	LIT-FLY-UV..... 248
FULO625..... 33	HC-04-2..... 41	HP3636-8..... 25	IGN-403..... 40	LIT-FLY-WS..... 248
GA-06..... 160	HC-05..... 41	HPR-12..... 26	IGN-409..... 40	LS-1..... 229
GA-30..... 160	HC-06..... 41	HPR-3..... 26	IQP-120..... 70	LS-2..... 229
GAU225-PURGE..... 160	HC-06-2..... 41	HPR-3-2P..... 26	IQP-120T..... 70	M-1..... 170
GC275..... 150	HC-07..... 41	HPR-3-2PG..... 26	IQP-KUBE..... 70	M-1R..... 170
GC277..... 150	HC-08-2..... 41	HPR-3NM..... 26	IQP-KUBE-SHROUD... 70	M-2..... 170
GG-1..... 72	HC-09..... 41	HPR-6..... 26	IRT657..... 177	M-2R..... 170
GG-1A..... 72	HC-1..... 23	HPR-6-2P..... 26	ISO-18..... 28	M-3..... 170
GG-1BOR..... 72	HC-10-2..... 41	HPR-6-2PG..... 26	ISO-2..... 28	M-3G..... 170
GG-1H..... 72	HC-1-100..... 23	HPR-EXT..... 26	ISO-4..... 28	M-3R..... 170
GG-1NHL..... 72	HC5410..... 112	HS012..... 151	JB8265..... 85	M-4..... 170
GG-1TF..... 72	HC5410X..... 112	HS03..... 151	LIT-CAT-CD..... 248	M-4R..... 170
GGC-12..... 72	HC5416..... 112	HS04..... 151	LIT-CAT-HVAC..... 248	M-5..... 170
GGC-6..... 72	HC5416X..... 112	HS06..... 151	LIT-CAT-NEW..... 248	M-5G..... 170
GN-23H..... 87	HC5420..... 112	HS08..... 151	LIT-FLY-3D..... 248	M-5R..... 170
GP1-4OBL..... 87	HC5420X..... 112	HS-144..... 175	LIT-FLY-3D-S..... 248	MAG-1..... 176
GT-750..... 160	HC5424..... 112	HS16..... 151	LIT-FLY-3PHASE..... 248	MB21..... 151
GV04..... 151	HC5436..... 112	HS-168HD..... 175	LIT-FLY-AVPAD..... 248	MB22..... 151
GV05..... 151	HC5436X..... 112	HS-192..... 175	LIT-FLY-BPPOOL..... 248	MBK-6..... 72
GV06..... 151	HC6202..... 112	HS24..... 151	LIT-FLY-CDLC..... 248	MG-1..... 167
GV07..... 151	HC6203..... 112	HS-30..... 175	LIT-FLY-CLAD..... 248	MG-ORING..... 167
GV08..... 151	HCO-128..... 80	HS-30-2..... 175	LIT-FLY-CLRVUE..... 248	MG-RGB..... 167
GV10..... 151	HCO-15..... 80	HS32..... 151	LIT-FLY-COND..... 248	MG-RGR..... 167
GV12..... 151	HCO-7..... 80	HS-60..... 175	LIT-FLY-CS1200..... 248	MHP-4..... 171
GV14..... 151	HCP-15..... 80	HS-60-2..... 175	LIT-FLY-CVKUBE..... 248	MICN109..... 42
GV16..... 151	HCP-7..... 80	HSA1..... 151	LIT-FLY-CVKUBE-S... 248	MKT-BANNER..... 249
GVA1..... 151	HDR-101..... 152	HSA2..... 151	LIT-FLY-CVMINI..... 248	MKT-MERCH-USACAPS... 249
GVA2..... 151	HDR-102..... 152	HSK1..... 140	LIT-FLY-CVMINI-S.... 248	 249
H1840-4..... 23	HDR-201..... 152	HSK5..... 140	LIT-FLY-DISC..... 248	MKT-POP-CDLC..... 249
H2424-4..... 23	HDR-202..... 152	HT1840-4..... 23	LIT-FLY-DST10..... 248	MKT-POP-CHEM..... 249
H2436-4..... 23	HDR-211..... 152	HT2424-4..... 23	LIT-FLY-DTP3..... 248	MKT-POP-CLRGOND 249
H3030-4..... 23	HDR-212..... 152	HT2436-4..... 23	LIT-FLY-DTP3ES..... 248	MKT-POP-CLRKIT..... 249
H3060-4..... 23	HDR-221..... 152	HT3030-4..... 23	LIT-FLY-ELITE..... 248	MKT-POP-CLRSHELF 249
H3232-4..... 23	HDR-222..... 152	HT3232-4..... 23	LIT-FLY-ET..... 248	MKT-POP-CLRSTAND 249
H3345-4..... 23	HEK-100..... 152	HT3345-4..... 23	LIT-FLY-FLOW..... 248	MKT-POP-CP22..... 249
H3434-4..... 23	HEK-200..... 152	HT3636-4..... 23	LIT-FLY-FPIC..... 248	MKT-POP-CVTUBE... 249
H3636-4..... 23	HEK-400..... 152	HT3648-4..... 23	LIT-FLY-GG..... 248	MKT-POP-DEV16... 249
H3642-4..... 23	HEK-500..... 152	HT3842-4..... 23	LIT-FLY-HEAT..... 248	MKT-POP-DEVBACKS 249
H3648-4..... 23	HFL-4257..... 152	HT3852-4..... 23	LIT-FLY-HEF..... 248	MKT-POP-DEVBACKSSLAT..... 249
H3652-4..... 23	HFL-4300..... 152	HT4040-4..... 23	LIT-FLY-HPAD..... 248	MKT-POP-DEVCOMBO 249
H3654-4..... 23	HFL-4333..... 152	HT4242-4..... 23	LIT-FLY-HRP..... 248	MKT-POP-DEVELEC. 249
H3672-4..... 23	HFL-5257..... 152	HT4558-4..... 23	LIT-FLY-HSI..... 248	MKT-POP-DEVEZC.. 249
H3842-4..... 23	HFL-5258..... 152	HVENT-2..... 41	LIT-FLY-LS..... 248	MKT-POP-DTBACKS. 249
H3852-4..... 23	HFL-5300..... 152	HVENT-2CA..... 41	LIT-FLY-MDP..... 248	MKT-POP-DTBACKSSLAT. 249
H3865-4..... 23	HFL-5301..... 152	HVENT-3..... 41	LIT-FLY-MOTORS..... 248	 249
H3872-4..... 23	HFL-5333..... 152	HVENT-3CA..... 41	LIT-FLY-MSPLIT..... 248	MKT-POP-DUCT..... 249
H4040-4..... 23	HMD1844-4..... 23	IC-1..... 72	LIT-FLY-PF..... 248	MKT-POP-DUCTSAM 248
H4242-4..... 23	HMD2436-4..... 23	IC-1R..... 72	LIT-FLY-PF-S..... 248	MKT-POP-ET..... 249
H4558-4..... 23	HMD3030-4..... 23	IGN-001..... 40	LIT-FLY-PUMP..... 248	MKT-POP-HSI..... 249
H5557-4..... 23	HMD3636-4..... 23	IGN-1F..... 40	LIT-FLY-SCAP..... 248	MKT-POP-LS..... 249
HC-01..... 41	HMD3648-4..... 23	IGN-1R..... 40	LIT-FLY-SPRAYER..... 248	MKT-POP-PF..... 249
HC-02..... 41	HMD3842-4..... 23	IGN-2..... 40	LIT-FLY-SPRAYER-S.. 248	MKT-POP-WS..... 249
HC-02-2..... 41	HMD4040-4..... 23	IGN-2-6P..... 40	LIT-FLY-UC..... 248	MKT-POP-WSDEMO 248
HC-03..... 41	HMR-130..... 152	IGN-401..... 40	LIT-FLY-UCSTRAP..... 248	

PART NUMBER INDEX cont'd

MKT-POSTER-CLRVUE...249	PG-50.....221	PI353.....106	POE68-01.....227	PWB-8.....185
MKT-POSTER-HPAD...249	PG-50-5.....221	PI360.....104	POE68-32.....227	PWH-16.....185
MKT-POSTER-MSPLIT...249	PG-50-55.....221	PI361.....104	PP-16.....185	PWH-4.....185
MKT-SAM-ELEC.....248	PG-BG.....221	PI361-3/4.....104	PP-32.....185	PWH-8.....185
MKT-SAM-HSI.....248	PG-BG-5.....221	PI362.....104	PP-4.....185	PWU-16.....185
ML-100.....167	PG-BG-55.....221	PI363.....104	PP-8.....185	PWU-4.....185
MP-12.....28	PG-PLUS.....221	PI364.....104	PPC-16.....185	PWU-8.....185
MP-12C.....28	PG-PLUS-5.....221	PI365.....104	PPC-32.....185	Q0200TR.....135
MP-12E.....28	PG-PLUS-55.....221	PI366.....104	PPC-4.....185	QAV-2.....191
MP-18.....28	PI203.....108	PI367.....104	PPC-8.....185	QN-S3.....74
MP-18C.....28	PI206.....108	PI368.....105	PRO-BLUE.....218	QT-1.....237
MP-18E.....28	PI221.....120	PI370.....105	PRO-BLUE-32.....218	QT-100.....237
MP-2.....28	PI222.....120	PI371.....105	PRO-BLUE-5.....218	QT-100G.....237
MP-2C.....28	PI226.....121	PI374.....104	PRO-BLUE-55.....218	QT-100N.....237
MP-2E.....28	PI227.....121	PI375.....104	PRO-BROWN.....218	QT-2.....237
MP-3.....28	PI228.....121	PI377.....105	PRO-BROWN-32.....218	QTH-1.....237
MP-3C.....28	PI232.....105	PI378.....105	PRO-BROWN-5.....218	QTH-2.....237
MP-3E.....28	PI232CX.....105	PI379.....105	PRO-BROWN-55.....218	QTM-1.....237
MP-4.....28	PI237.....121	PI381.....118	PRO-BUBBLE-32.....224	QTM-2.....237
MP-4C.....28	PI301.....108	PI382.....105	PRO-GREEN.....218	QTM-3.....237
MP-4E.....28	PI303.....108	PI383.....104	PRO-GREEN-32.....218	R-1.....172
MP-6.....28	PI304.....108	PI384.....105	PRO-GREEN-5.....218	RC-1.....242
MP-6C.....28	PI305.....108	PI385.....105	PRO-GREEN-55.....218	RLF-8.....224
MP-6E.....28	PI305LX.....108	PI385-34.....105	PRO-KLEEN.....219	RM-10.....87
MP-8.....28	PI306.....108	PI386.....105	PRO-KLEEN-5.....219	RM-1G.....87
MP-8C.....28	PI306CX.....108	PI387.....104	PRO-KLEEN-55.....219	RS-15.....175
MSA-44.....236	PI307.....108	PI389.....105	PRO-RED+.....219	RS-20.....175
MSA-45.....236	PI307CX.....108	PI389-GFI.....105	PRO-RED+32.....219	RS-31.....175
MSA-4545.....236	PI309.....108	PI390.....104	PRO-RED+5.....219	RS-41.....175
N20-SD.....160	PI310.....108	PI391.....104	PRO-RED+55.....219	RS-9.....175
PA10.....151	PI310LX.....108	PI393.....104	PRO-THAW.....229	RSC-GRN-02.....245
PA18.....151	PI311.....106	PI394.....104	PRO-THAW-1.....229	RSC-GRN-10.....245
PA25.....151	PI312.....106	PI411.....106	PROTREAT-151.....225	RSC-GRN-50.....245
PA25AP.....151	PI315.....106	PI412.....106	PROTREAT-152.....225	RSC-RED-02.....245
PANPATCH.....220	PI316.....108	PI416.....106	PROTREAT-161.....226	RSC-RED-10.....245
PANPATCH-32.....220	PI317.....108	PI419.....106	PROTREAT-200.....226	RSC-RED-50.....245
PANPATCH-BAG.....220	PI318.....106	PI426.....106	PROTREAT-217.....226	RSC-TOOL.....245
PC-600-B.....36	PI319.....106	PI431.....106	PROTREAT-350.....225	RS-TS10.....175
PC-600-S.....36	PI319CX.....106	PI435.....106	PRO-YELLOW.....219	S-3.....170
PC-609-B.....36	PI320.....106	PI458.....106	PRO-YELLOW-32.....219	SANI-CND.....220
PC-609-S.....36	PI321.....106	PI459.....106	PRO-YELLOW-5.....219	SANI-CND-32.....220
PC-622-B.....36	PI322.....106	PI908.....108	PRO-YELLOW-55.....219	SANI-CND-5.....220
PC-622-S.....36	PI326.....121	PI908CX.....108	PS-01.....225	SANI-CND-55.....220
PC-857.....36	PI327.....121	PI909LX.....108	PS-03.....225	SC-1.....84
PE-104.....190	PI328.....121	PI912.....108	PS-07.....225	SC-10.....78
PF-08.....222	PI330.....108	PI912LX.....108	PS-075.....225	SC-1WP.....84
PF-16.....222	PI331.....108	PI913.....108	PS-1.....223	SC-25.....78
PF-ADAPTER.....222	PI332.....108	PI914.....108	PS-20.....225	SCM-10.....78
PF-DEMO.....248	PI335.....112	PI929.....121	PS-40.....225	SCM-117-16.....229
PF-IGUN.....222	PI337-3.....121	PK-2.....179	PW-16.....185	SCM-25.....78
PF-IHOSE.....222	PI340.....106	PK-2B.....179	PW-32.....185	SCM-5.....78
PF-KIT.....222	PI341.....106	POE100-01.....227	PW-4.....185	SH-06.....87
PG-100.....221	PI350.....106	POE100-32.....227	PW-8.....185	SH-12.....87
PG-100-5.....221	PI351.....106	POE32-01.....227	PWB-16.....185	SOS-1.....71
PG-100-55.....221	PI352.....106	POE32-32.....227	PWB-4.....185	ST-10.....81

PART NUMBER INDEX cont'd

ST-24..... 81	TRIPLE-D..... 218	UC2626-3..... 20	VAX-5..... 236	W105..... 154
ST-4..... 81	TRIPLE-D-32..... 218	UC2628-2..... 20	VAX-6..... 236	W105-100..... 154
ST75..... 73	TRIPLE-D-5..... 218	UC2636-3CA..... 21	VAX-8..... 236	W105-50..... 155
SUPERKOOL..... 224	TRIPLE-D-55..... 218	UC2838-3..... 20	VC-4..... 236	W121..... 154
SUPERKOOL-16..... 224	TRIPLE-D-AER..... 218	UC3030-2..... 20	VC-4R..... 236	W121-100..... 154
T-1..... 165	TRIPLE-D-FC..... 218	UC3030-3..... 20	VCC-4..... 236	W121-50..... 155
T-10..... 165	TRIPLE-D-GRAN..... 218	UC3030-3CA..... 21	VCC-4B..... 236	W122..... 154
T-100..... 165	TRIPLE-D-RTU..... 218	UC3036-2..... 20	VCR-1..... 237	W122-100..... 154
T-101..... 165	TRIPLE-D-RTU-FC..... 218	UC3036-3..... 20	VCRT-1..... 237	W122-50..... 155
T-11..... 165	TS-1..... 150	UC3036-3CA..... 21	VCRT-1R..... 237	W123..... 154
T-12..... 165	TS-3..... 150	UC3040-2..... 20	VCRT-1RK..... 237	W123-100..... 154
T-13..... 165	TS-4..... 150	UC3040-3..... 20	VCRT-1S..... 237	W123-50..... 155
T-14..... 165	TS-5..... 150	UC3040-3CA..... 21	VE-2..... 236	W124..... 154
T-15..... 165	TT-120..... 171	UC3048-3..... 20	VLC-10..... 237	W124-100..... 154
T-16..... 165	TT-24..... 171	UC3132-3L..... 21	VLC-12..... 237	W124-50..... 155
T-17..... 165	TT-240..... 171	UC3143-2..... 20	VLC-18..... 237	W125..... 154
T-18..... 165	U3353-3..... 20	UC3232-2..... 20	VLC-25..... 237	W125-100..... 154
T-20..... 165	U3650-3..... 20	UC3232-3..... 20	VLC-4..... 237	W125-50..... 155
T-200..... 166	U3654-3..... 20	UC3232-3CA..... 21	VLC-5..... 237	W141..... 154
T-21..... 165	U3660-3..... 20	UC3234-2..... 20	VLC-6..... 237	W141-100..... 154
T2401..... 142	U3678-3..... 20	UC3237-3..... 20	VLC-8..... 237	W141-50..... 155
T2403..... 142	U3865-3..... 20	UC3434-2..... 20	VP68-01..... 228	W142..... 154
T2404..... 142	U3870-3..... 20	UC3434-3..... 20	VP68-05..... 228	W142-100..... 154
T-300..... 166	U4054-3..... 20	UC3445-2..... 20	VP68-32..... 228	W142-50..... 155
T3401..... 142	U4550-3..... 20	UC3445-3..... 20	VS-4..... 236	W143..... 154
T3403..... 142	U4558-3..... 20	UC3445-3CA..... 21	VST-4..... 236	W143-100..... 154
T3501..... 142	U4848-3..... 20	UC3539-3L..... 21	VST-44..... 236	W143-50..... 155
T-400..... 166	U4854-3..... 20	UC3636-2..... 20	VT-24..... 236	W144..... 154
T-408..... 166	U4866-3..... 20	UC3636-3..... 20	VT-4..... 236	W144-100..... 154
T-409..... 166	U5053-3..... 20	UC3636-3CA..... 21	VTR-24..... 236	W144-50..... 155
T-411..... 166	U5056-3..... 20	UC3640-2..... 20	VTS-10..... 236	W145..... 154
T-412..... 166	U5075-3..... 20	UC3642-3..... 20	VTS-12..... 236	W145-100..... 154
T-417..... 166	U5079-3..... 20	UC3642-3CA..... 21	VTS-14..... 236	W145-50..... 155
T-418..... 166	U5252-3..... 20	UC3648-2..... 20	VTS-18..... 236	W801..... 154
T5401..... 142	U5260-3..... 20	UC3648-3..... 20	VTS-3-10..... 236	W801-100..... 154
T6752..... 142	U5557-3..... 20	UC3648-3CA..... 21	VTS-3-12..... 236	W801-50..... 155
T6753..... 142	U6067-3..... 20	UC3842-2..... 20	VTS-3-14..... 236	W802..... 154
T7752..... 142	UA-1..... 71	UC3842-3..... 20	VTS-3-18..... 236	W802-100..... 154
T-8..... 165	UC1636-2..... 20	UC4040-2..... 20	VTS-46..... 236	W802-50..... 155
T-9..... 165	UC1636-3..... 20	UC4040-3..... 20	VTS-56..... 236	W803..... 154
TC-007..... 171	UC1838-3..... 20	UC4040-3CA..... 21	VTS-68..... 236	W803-100..... 154
TC-25..... 74	UC1838-3CA..... 21	UC4042-3..... 20	VTS-810..... 236	W803-50..... 155
TD-1..... 177	UC2424-2..... 20	UC4044-3L..... 21	VVC-1..... 236	W804..... 154
TD-2..... 177	UC2424-3..... 20	UC4347-3..... 20	W101..... 154	W804-100..... 154
TG-05..... 176	UC2424-3CA..... 21	UV-1..... 32	W101-100..... 154	W804-50..... 155
TG-10..... 74	UC2430-2..... 20	UV-BULB..... 32	W101-50..... 155	W805..... 154
TG-30..... 176	UC2430-3..... 20	VA-3-346..... 236	W102..... 154	W805-100..... 154
TG-30-1..... 176	UC2436-2..... 20	VA-34..... 236	W102-100..... 154	W805-50..... 155
TG-30-12..... 176	UC2436-3..... 20	VA-46..... 236	W102-50..... 155	WC02..... 157
TG-87A..... 74	UC2436-3CA..... 21	VA-68..... 236	W103..... 154	WC03..... 157
TI1401..... 142	UC2442-3..... 20	VAU-24..... 236	W103-100..... 154	WC04..... 157
TI1404..... 142	UC2448-2..... 20	VAU-45..... 236	W103-50..... 155	WC05..... 157
TLC-3-10..... 151	UC2448-3..... 20	VAX-2..... 236	W104..... 154	WC06..... 157
TLC-3-12..... 151	UC2448-3CA..... 21	VAX-3..... 236	W104-100..... 154	WC07..... 157
TLC-3-8..... 151	UC2626-2..... 20	VAX-4..... 236	W104-50..... 155	WC08..... 157

PART NUMBER INDEX *cont'd*

WC09	157	WP1214-50	243	X2430211	24
WC10	157	WP1234-50	243	X2436211	24
WC12	157	WP1234-82	243	X2436311	24
WC14	157	WP1238-164	243	X3030211	24
WC16	157	WP1238-50	243	X3030311	24
WCA1	157	WP1258-164	243	X3232211	24
WG840204	132	WP1258-50	243	X3232311	24
WG840204HT	132	WP1278-50	243	X3244211	24
WG840205	132	WP1278-82	243	X3636211	24
WG840205HT	132	WS-1	71	X3636311	24
WG840463	133	WT04	157	X3830211	24
WG840464	133	WT04C	157	X3836211	24
WG840465	133	WT05	157	X3842211	24
WG840466	133	WT05C	157	X3848311	24
WG840467	133	WT07	157	X5055301	24
WG840468	133	WT07C	157		
WG840469	133	WT11	157		
WG840583	132	WT11C	157		
WG840584	132	WT15	157		
WG840585	132	WT15C	157		
WG840586	132	WTA1	157		
WG840587	132	WTB05	157		
WG840588	132	WTB05C	157		
WG840589	132	WTB07	157		
WG840590	132	WTB07C	157		
WG840595	132	WTB07M	157		
WG840596	132	WTB11	157		
WG840727	132	WTB11CR	157		
WG840728	132	WTB11D	157		
WG840728HT	132	WTB11M	157		
WG840729	132	WTB15	157		
WG840729HT	132	WTB15C	157		
WG840730	132	WTBA1	157		
WG840730HT	132	WTM05	157		
WG840731	132	WTM05C	157		
WG840731HT	132	WTM07	157		
WG840736HT	132	WTM07C	157		
WG840737HT	132	WTM1	157		
WG840738HT	132	WTM11	157		
WG840739HT	132	WTM11C	157		
WHT20	155	WTM14	157		
WHTB10-20	155	WTM14C	157		
WHTB10-50	155	WTM1C	157		
WHTB12-20	155	WTM2	157		
WHTB12-50	155	WTM2C	157		
WHTB14-50	155	WTMB05	157		
WHTR14-50	155	WTMB05C	157		
WHTW14-50	155	WTMB07	157		
WM1002	121	WTMB07C	157		
WM1003	121	WTMB11	157		
WM1009	121	WTMB11C	157		
WM1014	121	WTMB14	157		
WP1212-164	243	WTMB14C	157		
WP1212-50	243	X2424211	24		
WP1214-164	243	X2424311	24		

PADS

AIR MOVEMENT

HEATING PRODUCTS

CONDENSATE MANAGEMENT

GENERAL INDUSTRIAL

DEVCO

ELECTRICAL

TOOLS

PLUMBING

DUCTLESS SYSTEMS

MAINTENANCE CHEMICALS

INLINE COMPONENTS



ABOUT DIVERSITECH

DiversiTech is North America's largest manufacturer of air conditioning condenser pads and a leading supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVACR) industry.

Headquartered in Atlanta, Georgia, DiversiTech manufactures a suite of products, which includes a wide range of mechanical, electrical, chemical, and structural parts for HVACR and electrical systems, and swimming pool installations. The company maintains manufacturing and distribution facilities in key U.S. locations, Europe, and in the Far East. DiversiTech has enjoyed a continued history of successful growth and has acquired industry-recognized brand names including Rehvac, Devco® Enterprises, Wagner® Manufacturing, The Black Pad®, Hef-T-Pad™ and Specialty Chemical.



DOWNLOAD <http://media.diversitech.com/doc/DOC32509.pdf>

CORRECTIONS/COMMENTS feedback@diversitech.com

LIT-CAT-HVAC
6650 Sugarloaf Parkway
Duluth, GA 30097
678.542.3600
800.995.2222
678.542.3700 Fax
www.diversitech.com
©2015 DiversiTech Corporation



Model No.
WG84072B
WAGNER
A Division of DiversiTech
MOTORS



1/4HP SE