

Series Two™, "TC"

Staged Models (Two Heating Modules) with Thermostatic Control

Specifications

Tankless Electric Water Heater

Applications

- Single or multi-fixture
- Commercial/Industrial
- Adjustable temperature setting with $\pm 1^{\circ}\text{F}$ temperature stability
- Solar backup with FS option

Features

- Turns on in stages based on hot water demand
- On demand hot water
- Continuous hot water. No storage capacity to run out
- Reduces installation cost and material. No T&P relief valve needed (check local codes) or venting
- Easy installation with integral $3/4"$ NPT fittings
- Cut energy waste. Flow switch activates heater only on demand (no standby heat loss)
- Two glass-fiber reinforced heater bodies and nichrome elements – a unique, patented flow path ensures optimum heat transfer and extended element life
- Warranty, five (5) years limited on leaks, one (1) year parts
- Field serviceable replaceable cartridge element
- Unit mounts on wall
- High temperature limit switch

Optional Features

- Factory set ambient to 180°F (FS)
- Multi laves 0.3 turn on. Staged up to 4 laves 105°F - 110°F temp setting (ML)
- Sanitation 180°F (S)
- N4, N4X (304SS) enclosures

Product Specifications

Dimensions:	10.25" x 10.75" x 4.5"
Weight:	10.5 lb
Cover:	Enameled steel
Color:	White
Element:	Dual replacement cartridge inserts Thermostatic control ($\pm 1^{\circ}\text{F}$) accuracy at steady state
Fittings:	$3/4"$ NPT fittings at bottom of unit
Min. Operating Pressure:	40 PSI
Max. Operating Pressure:	150 PSI
UL listed file number:	E86887

U.S. Patent #'s: 4,762,980 and 4,960,976

Special Design Service

Inquiries for units for unique applications are welcome.
Call our Technical Service department at **1 800 543 6163**.



NO LEAD

*The wetted surface of this product contacted by water contains less than 0.25% lead and meets NSF/ANSI 372



Suggested Specification

Tankless water heater shall be an Eemax Series Two model number EX _____.

Heater shall have two heating modules. Element shall be replaceable cartridge insert. Unit shall have a replaceable filter in the inlet connector. Heater shall be fitted with $3/4"$ NPT water connections. Maximum operating pressure of 150 PSI. Hot water storage tanks prohibited. Unit shall be Eemax or approved equal.

NOTE: Refer to rating chart for product information.

Heater available with the following features:

FS	Factory set up to 180°F
ML	Multi laves 0.3 turn on. Staged up to 4 laves 110°F temp setting
S	Sanitation 180°F
N4	NEMA 4 steel cabinet with powder coat finish
N4X	NEMA 4 stainless steel, corrosion-resistant cabinet

NOTE: Unit should not be used in a recirculation application. Contact an EEMAX representative for alternative recommendations.

Series Two, "TC"


Staged Models (Two Heating Modules) with Thermostatic Control

Specifications


Tankless Electric Water Heater

Suffix Definitions

FS	Factory set up to 180°F
ML	Multi laves 0.3 turn on. Staged up to 4 laves 110°F temp setting
S	Sanitation 180°F

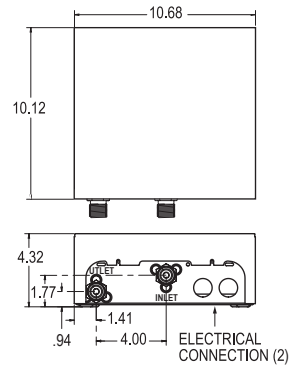

NEMA 4/4X

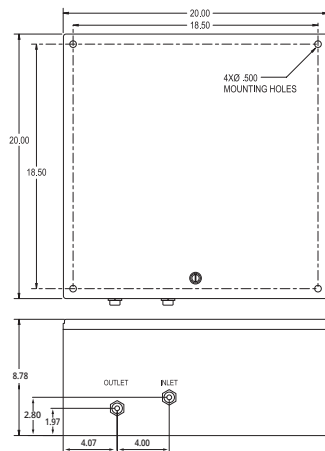

							TEMPERATURE RISE °F			
MODEL NUMBER	KW	TOTAL AMP DRAW	CIRCUITS REQUIRED X BREAKER SIZE	TURN ON (GPM)	RECOMMENDED WIRE SIZE (75° C/CU)	MAX FLOW GPM	1.5 GPM	2.0 GPM	2.5 GPM	3.0 GPM
VOLTS 208 Three Phase Delta										
EX144TC	15.0	64	(2x40)	0.7	10 AWG	3.0	68°	51°	41°	34°
EX144TC (derated 208V performance)	11.2	54	(2x30)	0.7	10 AWG	3.0	51°	38°	31°	25°
EX144TC S	15.0	64	(2x40)	0.7	10 AWG	3.0	68°	51°	41°	34°
EX144TC ML	15.0	64	(2x40)	0.3	10 AWG	3.0	68°	51°	41°	34°
EX144TC FS	15.0	64	(2x40)	0.7	10 AWG	3.0	68°	51°	41°	34°
EX190TC	19.0	80	(2x40)	0.7	8 AWG	3.0	87°	65°	52°	43°
EX190TC (derated 208V performance)	14.0	68	(2x40)	0.7	8 AWG	3.0	64°	48°	38°	32°
EX190TC S	19.0	80	(2x40)	0.7	8 AWG	3.0	87°	65°	52°	43°
EX190TC FS	19.0	80	(2x40)	0.7	8 AWG	3.0	87°	65°	52°	43°
EX190TC ML	19.0	80	(2x40)	0.3	8 AWG	3.0	87°	65°	52°	43°
EX023240TC	23.0	96	(2x50)	0.7	8 AWG	3.0	105°	79°	63°	52°
EX023240TC (derated 208V performance)	17.3	83	(2x50)	0.7	8 AWG	3.0	79°	59°	47°	39°
EX023240TC S	23.0	96	(2x50)	0.7	8 AWG	3.0	105°	79°	63°	52°
EX023240TC FS	23.0	96	(2x50)	0.7	8 AWG	3.0	105°	79°	63°	52°
EX023240TC ML	23.0	96	(2x50)	0.3	8 AWG	3.0	105°	79°	63°	52°
VOLTS 208 Single Phase										
EX1608TC	16.6	80	(2x40)	0.7	8 AWG	3.0	76°	57°	45°	38°
EX1608TC S	16.6	80	(2x40)	0.7	8 AWG	3.0	76°	57°	45°	38°
EX1608TC FS	16.6	80	(2x40)	0.7	8 AWG	3.0	76°	57°	45°	38°
EX1608TC ML	16.6	80	(2x40)	0.3	8 AWG	3.0	76°	57°	45°	38°
VOLTS 277										
EX160TC	16.0	58	(2x30)	0.7	10 AWG	3.0	73°	55°	44°	36°
EX160TC S	16.0	58	(2x30)	0.7	10 AWG	3.0	73°	55°	44°	36°
EX160TC FS	16.0	58	(2x30)	0.7	10 AWG	3.0	73°	55°	44°	36°
EX160TC ML	16.0	58	(2x30)	0.3	10 AWG	3.0	73°	55°	44°	36°
EX200TC	20.0	72	(2x40)	0.7	8 AWG	3.0	91°	68°	55°	46°
EX200TC S	20.0	72	(2x40)	0.7	8 AWG	3.0	91°	68°	55°	46°
EX200TC FS	20.0	72	(2x40)	0.7	8 AWG	3.0	91°	68°	55°	46°
EX200TC ML	20.0	72	(2x40)	0.3	8 AWG	3.0	91°	68°	55°	46°
CNL Models										
EX144TC CNL	15.0	64	(1x70)	0.7	6 AWG	3.0	68°	51°	41°	34°
EX144TC S CNL	15.0	64	(1x70)	0.7	6 AWG	3.0	68°	51°	41°	34°
EX144TC FS CNL	15.0	64	(1x70)	0.7	6 AWG	3.0	68°	51°	41°	34°
EX144TC ML CNL	15.0	64	(1x70)	0.3	6 AWG	3.0	68°	51°	41°	34°
EX190TC CNL	19.0	80	(1x80)	0.7	4 AWG	3.0	87°	65°	52°	43°
EX190TC S CNL	19.0	80	(1x80)	0.7	4 AWG	3.0	87°	65°	52°	43°
EX190TC FS CNL	19.0	80	(1x80)	0.7	4 AWG	3.0	87°	65°	52°	43°
EX190TC ML CNL	19.0	80	(1x80)	0.3	4 AWG	3.0	87°	65°	52°	43°
EX1608TC CNL	16.6	80	(1x80)	0.7	4 AWG	3.0	76°	57°	45°	38°
EX1608TC S CNL	16.6	80	(1x80)	0.7	4 AWG	3.0	76°	57°	45°	38°
EX1608TC FS CNL	16.6	80	(1x80)	0.7	4 AWG	3.0	76°	57°	45°	38°
EX1608TC ML CNL	16.6	80	(1x80)	0.3	4 AWG	3.0	76°	57°	45°	38°

* 240V units can be used on 208V single phase with 25% reduced temperature output. Please note per UL standards the rating plate and installation instructions will all be according to a 240V applied voltage. Check with local officials prior to derating the electrical infrastructure.

"C" indicates evaluation and compliance to either Underwriters Laboratories (UL) or Intertek (ETL) under CAN/CSA-C22.2 No. 64/No. 88. CNL SKUs are Canada specific.

NOTE: Unit should not be used in a recirculation application. Contact an EEMAX representative for alternative recommendations.