

JOB NAME:

QUANTITY:

ITEM NO.:

PRODUCT NAME:

**PRE-RINSE SPRING STYLE WALL MOUNT
WITH WALL BRACKET & ADD-ON FAUCET**

☐ SPECIAL CONFIGURATION

MODEL:

- ☐ 34355 WITH 6" SWING SPOUT
- ☐ 34363 WITH 8" SWING SPOUT
- ☐ 34371 WITH 10" SWING SPOUT
- ☐ 34398 WITH 12" SWING SPOUT
- ☐ 34401 WITH 14" SWING SPOUT
- ☐ 34428 WITH 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ☐ IN-LINE DUAL CHECK VALVE
- ☐ BRUSH
- ☐ VANDAL RESISTANT KIT
- ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
- ☐ OTHER _____

FEATURES:

MAIN CONTROL VALVE

- * WALL MOUNT
- * ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
- * INTERNAL SPRING LOADED CHECK VALVES
- * SWIVELLING SEAT DISKS
- * HOT SIDE STEM - RIGHT HAND CHECK
- * COLD SIDE STEM - LEFT HAND CHECK
- * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

ADD-ON CONTROL VALVE

- * STEM - RIGHT HAND SWIVEL
- * HOT INDEX BUTTON
- * SWIVELLING SEAT DISKS
- * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

HOSE

- * 36" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

SPRAY VALVE


- * SOLID BRASS SHOWER HEAD - NO "O" RINGS TO LEAK
- * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
- * FITS ALL BRANDS
- * 2.65 GPM AT 80 PSI
- * SHOWER SPRAY PATTERN

WALL BRACKET

- * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX. STATIC
- * PRESSURE 200 PSI MAX. STATIC
- * SHIPPING WEIGHT: 15.0 LBS

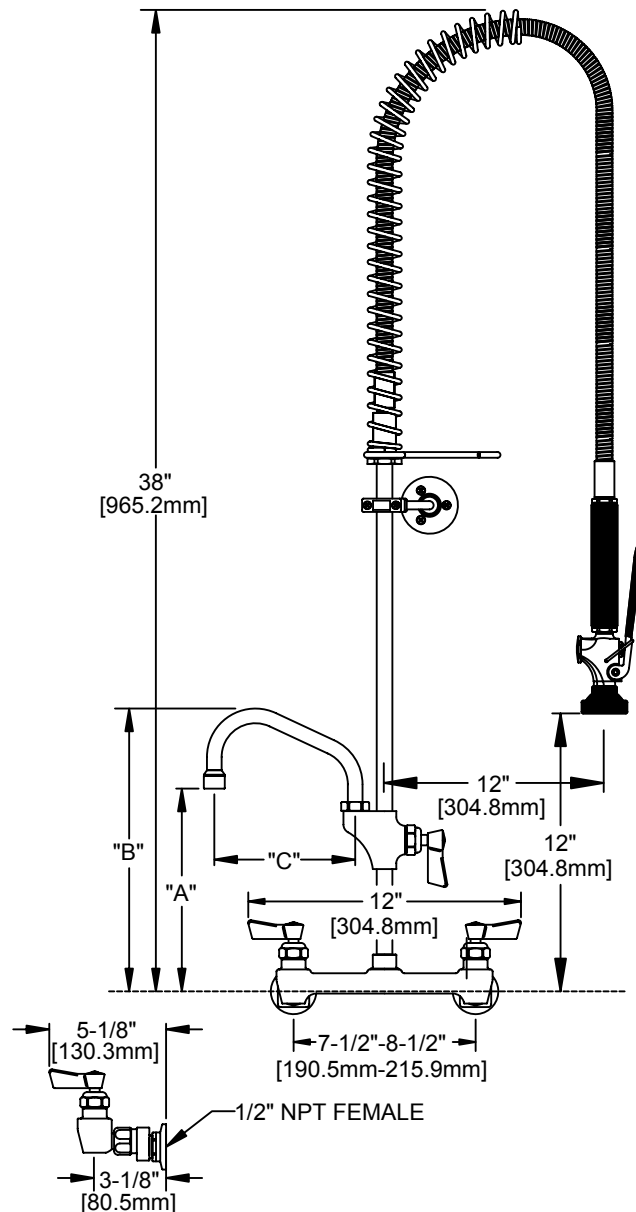

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
1/2" NPT MALE* 8" ± 1/2" [203.2 ± 12.7mm] *NIPPLES NOT INCLUDED	34355	8-3/4" [221.3mm]	12-3/8" [313.3mm]	6" [152.4mm]
	34363	9" [227.6mm]	12-7/8" [326.0mm]	8" [203.2mm]
	34371	9-5/8" [243.5mm]	13-3/8" [340.3mm]	10" [254.0mm]
	34398	10-1/4" [259.4mm]	13-7/8" [351.4mm]	12" [304.8mm]
	34401	10-5/8" [275.0mm]	14-3/4" [373.7mm]	14" [355.6mm]
	34428	11-1/2" [292.1mm]	15-3/8" [389.5mm]	16" [406.4mm]

ANSI/A112.18.1M