

INSTALLATION INSTRUCTIONS



Floor Mount Laundry Tubs

Models: FL1, FL7, P1, SF1F, FLTDII, PA11, TAT1

Thank you for selecting Fiat Products. To ensure this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Also be sure your installation conforms to local codes.

IMPORTANT: Unpack your new laundry tub and inspect carefully for damage. Exercise care during installation. Rough handling or dropped tools may chip or crack material.

OBSERVE LOCAL PLUMBING AND BUILDING CODES

NOTE: Pictures may not exactly define contour of components

INSTALLATION PLANNING


Study all job prints, specifications, and instructions. Check the level and quality of sub floor.

1 FAUCET INSTALLATION

1. Turn the laundry tub upside down and place it on a protected surface to prevent scratches or damage.
2. Measure the actual faucet dimensions to determine the correct hole sizes.
3. On the underside of the faucet ledge on the laundry tub, locate the designated drill points.
4. Carefully drill holes at the marked points based on the faucet measurements.
5. Install the faucet onto the tub, ensuring a secure fit.


2 LEG MOUNTING PROCEDURE

1. To mount legs to tub, turn unit upside down and lay on a protected surface.
2. Slip notched end of leg into corner of tub as shown in DETAIL A.
3. Drive the leg home by carefully striking with a wood block and hammer.
4. Apply one leveling bolt on each leg as shown in DETAIL B.
5. Adjust all four legs after standing tub upright until unit is level.

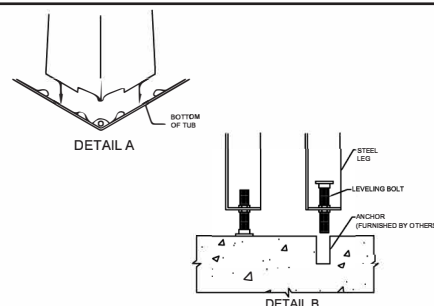


DRAIN ASSEMBLY & PACKING LISTS

IMPORTANT NOTICE: The Gasket/Washer supplied with the drain assembly should provide adequate water seal. If additional protection is desired, used ONLY Teflon Tape. Use of Plumbers Putty may adversely affect the structural integrity of the Drain Assembly and will void the warranty.

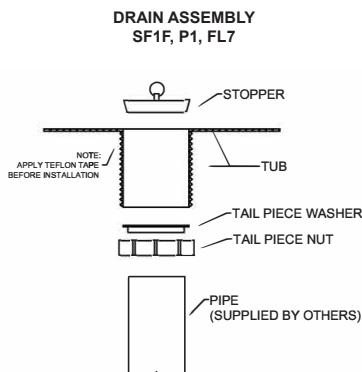


QTY	DESCRIPTION
1	Laundry Tub
4	Painted Steel Legs
4	Carriage Bolts
8	1/4" - 20 Hexnuts
1	Stopper
1	Tail Piece Washer
1	Tail Piece Nut
1	Installation Manual

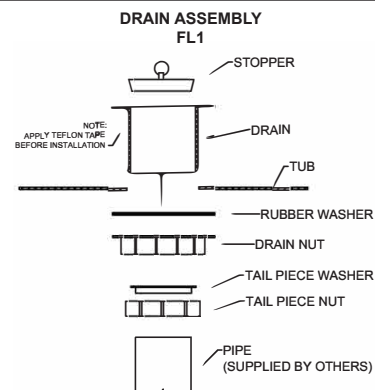


QTY	DESCRIPTION
1	Laundry Tub
4	Painted Steel Legs
4	Carriage Bolts
8	1/4" - 20 Hexnuts
1	Stopper
1	Tail Piece Washer
1	Tail Piece Nut
1	Drain
1	Rubber Washer
1	Drain Washer
1	Installation Manual

DRAIN ASSEMBLY FLTDII

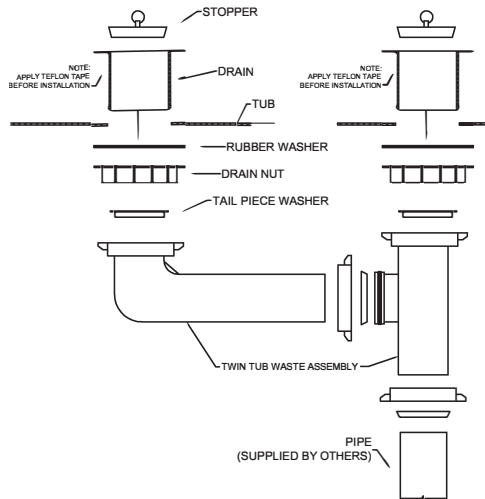

QTY	DESCRIPTION
1	Laundry Tub
4	Painted Steel Legs
4	Carriage Bolts
8	1/4" - 20 Hexnuts
2	Stoppers
2	Tail Piece Washers
2	Tail Piece Nuts
2	Drains
2	Rubber Washers
2	Drain Washers
1	Waste Pipe Assembly
1	Installation Manual

DRAIN ASSEMBLY TAT1, PA11

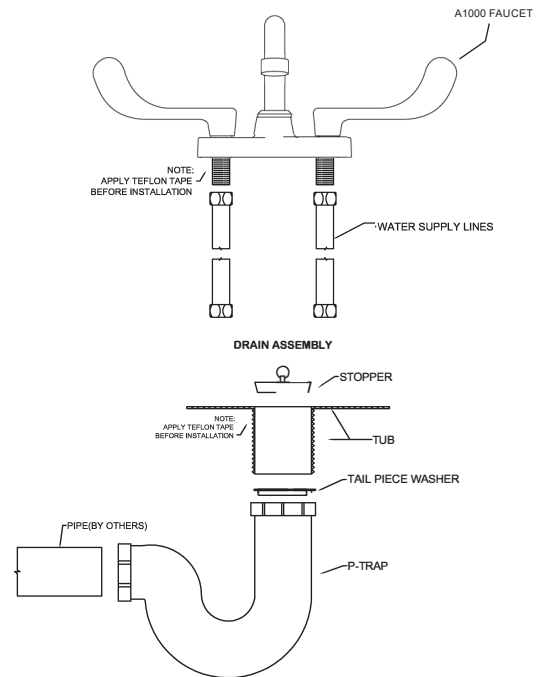

QTY	DESCRIPTION
1	Laundry Tub
4	Painted Steel Legs
4	Carriage Bolts
8	1/4" - 20 Hexnuts
1	Stopper
1	Tail Piece Washer
1	Tail Piece Nut
1	A1000 Faucet
2	Supply Lines
1	P-Trap Assembly
1	Installation Manual

OPTIONAL COMPONENTS



A2000 Overflow Tub

LAUNDRY TUB CARE AND CLEANING

This laundry tub has been specifically designed and engineered to exceed demanding strength and stress factors required for use. It is stain resistant, semi gloss finish. Like any fine finish, it requires reasonable care to maintain its beauty and luster.

Day-to-day cleaning: Wash with warm water, a soft cloth, and mild liquid detergent.

For stubborn stains: Use a Non-Abrasive, liquid detergent cleaner, applied using a soft cloth. More persistent stains, tar, or paint can be removed with naphtha or mineral spirits. Remove excess plaster by scraping with a sharpened soft wood stick. Avoid wire brushes, metal scrapers, or tools.

NEVER USE ABRASIVE SCOURING POWDERS, SOLVENT BASED CLEANSERS, OR SCOURING PADS AS THEY TEND TO DULL THE FINISH.