

SPECIFICATIONS





Features/Benefits

- For 3-Hole 10" Center Installation
- Combination 1/2" Copper Sweat, 1/2" NPT Threaded Connectors for All Ports
- Installs in Decks Up to 1 1/2" Thick
- Ceramic Disc Cartridge
- Includes Protective Cap

Standards & Certifications

ASME A112.18.1/CSA B125.1

Flow Rate

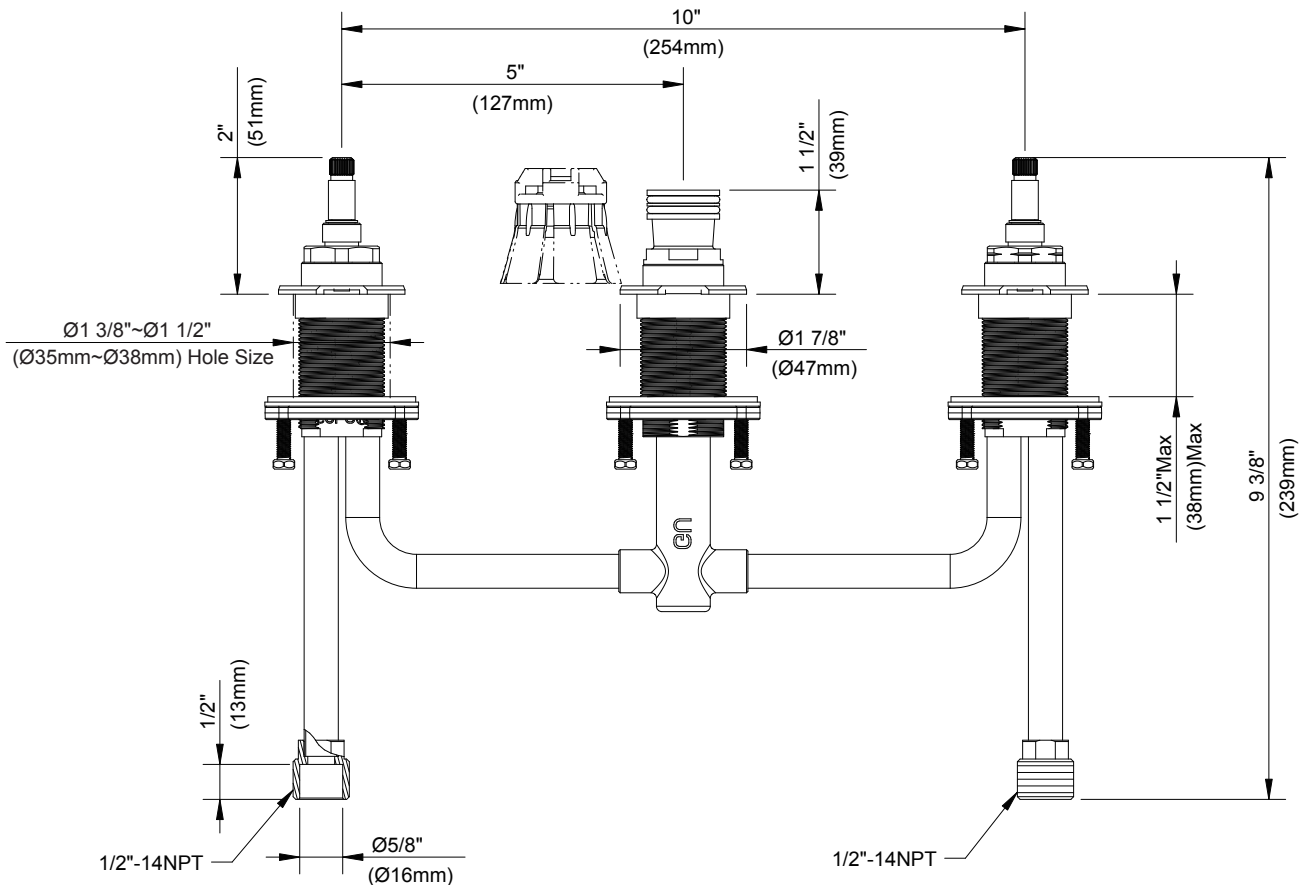

Submittal Information:

Name:

Location:

Contractor:

Contact #:

Valve brute fixe pour baignoire romaine

CARACTÉRISTIQUES

Caractéristiques et avantages



- Installation à 3 trous, entraxe de 10 po
- Raccords mixtes en cuivre soudés de 1/2 po et à filetage NPT de 1/2 po pour tous les conduits
- Montage d'une épaisseur maximale de 1 1/2 po
- Cartouche à disque céramique
- Capuchon de protection compris



Normes et certifications

ASME A112.18.1/CSA B125.1

Débit

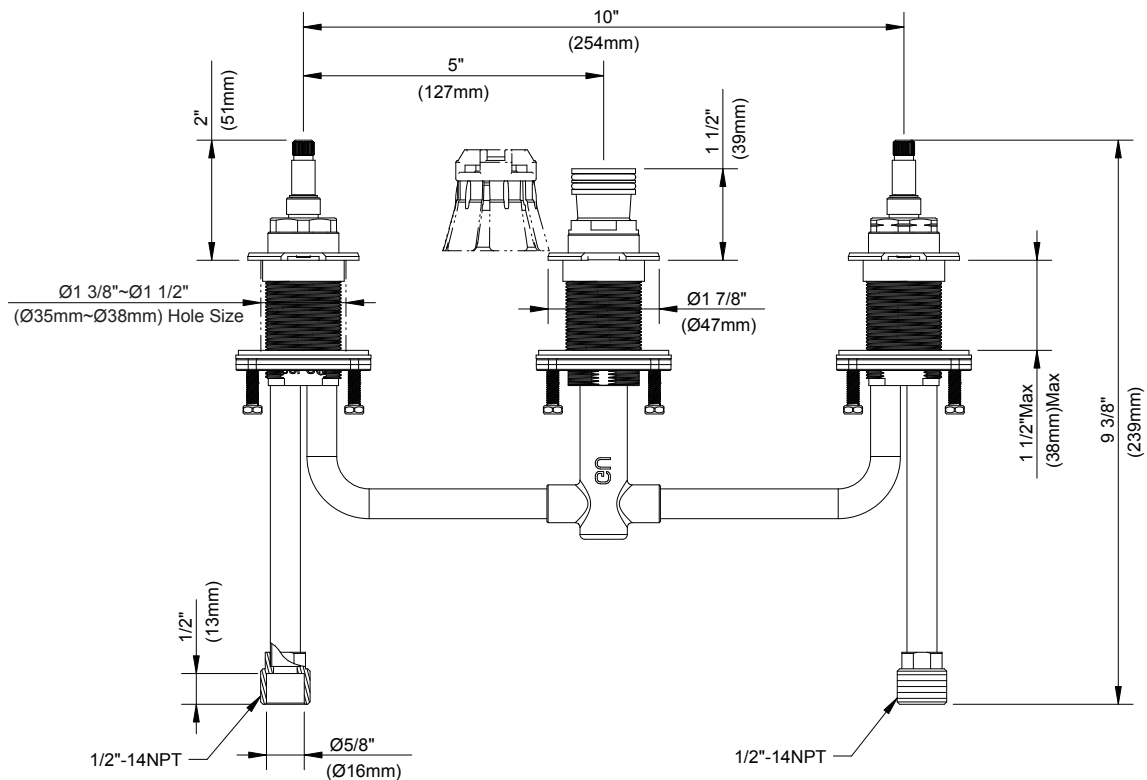

Renseignements pour la soumission :

Nom :

Emplacement : _____

Entrepreneur :

Numéro de téléphone : _____

Válvula de empalme fija para bañera romana

ESPECIFICACIONES

Características/Beneficios



- Para instalación en 3 orificios con centros de 10"
- Conectores para todos los puertos con combinación de cobre soldado de 1/2" y tapón roscado NPT de 1/2"
- Para instalar en mesadas de hasta 1 1/2" de grosor
- Cartucho de disco de cerámica
- Incluye tapa protectora



Estándares y certificación

ASME A112.18.1/CSA B125.1

Caudal

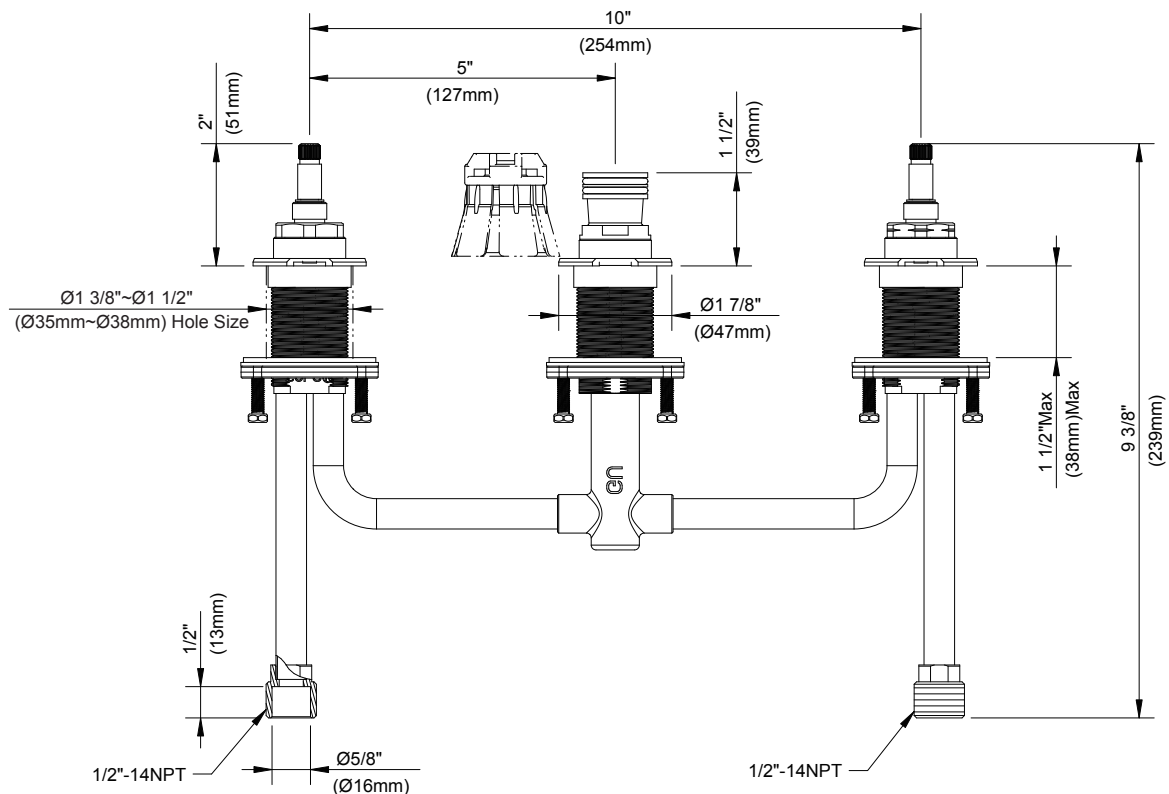

Información a presentar:

Nombre: _____

Ubicación: _____

Contratista:

N.º de contacto: _____