

Features:

GHE27740

- Vitreous China
- High Efficiency Urinal 0.5 gpf (1.9 Lpf) and 1.0 gpf (3.8 Lpf) when used with the appropriate flush valve.
- ADA compliant
- Elongated Rim (14" for finished wall)
- Washout Flush Action system
- Outlet 1-1/2" x 1-1/2" G0099255 Included
- 2" Outlet spud NPT
- Integral Strainer
- One-Piece Wall Hanger G0099161 Included
- Flushometer not included



Technical Information:

Configuration	Wall-mount
Water per flush	0.5 gpf (1.9 Lpf) 1.0 gpf (3.8 Lpf)
Height	18 1/2"
Width	13 3/8"
Depth	14"
Inlet	3/4"
Outlet	2"
Shipping Weight	33 lbs


Accessories: (To Be Purchased Separately)
N/A

Available Colors:

- White only
- Other: Refer to price Book for additional colors/finished

Warranty:

- Limited Lifetime on Vitreous China, refer to the website for more details.

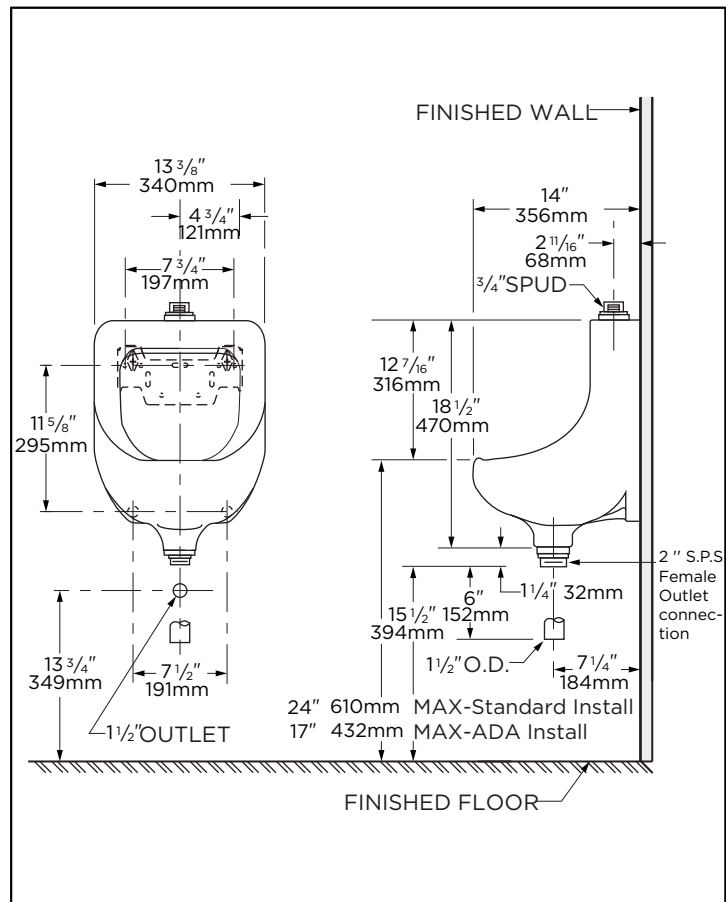

HIGH EFFICIENCY URINAL
HEU



NOTES: All dimensions are in inches and millimeter. Illustrations may not be drawn to scale.

Use flush valve MFR'S recommended rough-in. Recommended static water pressure for plumbing fixtures is 20-80 psi static per ASME standards A112.19.2 Appendix B.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2 PLUMBERS NOTE: Provide suitable reinforcement for all wall supports.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS EITHER A LOW CONSUMPTION URINAL WITH AN AVERAGE CONSUMPTION OF 1.0 gpf (3.8 Lpf) OR LESS, OR AS A HIGH EFFICIENCY URINAL WITH AN AVERAGE CONSUMPTION OF 0.5 gpf (1.9 Lpf). URINAL CONSUMPTION IS DETERMINED BY THE FLUSHOMETER VALVE.