


Position	Count	Description	Unit price
	-1	UP 43-75 BF  Product photo could vary from the actual product Product No.: 52722370 The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by: * Ceramic shaft and radial bearings. * Carbon axial bearing. * Stainless steel rotor can and bearing plate. * Corrosion-resistant impeller, Composite, PES. * Bronze pump housing. The motor is a 1-phase motor. No additional motor protection is required. Liquid: Liquid temperature range: 32 .. 230 °F Density: 62.4 lb/ft³ Technical: Approvals on nameplate: UL, CSA Materials: Pump housing: Bronze DIN W.-Nr. 2.1176.01 Impeller: Composite, PES Installation: Maximum ambient temperature: 104 °F Ambient max at 176°F liquid: 176 °F Maximum operating pressure: 145 psi Flange standard: USA Oval Type of connection: Bronze Flange Pipe connection: 2 - Bolt Flange Pressure stage: 10 Port-to-port length: 8 1/2 in Electrical data: Number of poles: 2	On request



Company name: -
Created by: -
Phone: -
Fax: -
Date: -

Position	Count	Description	Unit price
		Max. power input: 215 W Rated power - P2: 0.161 HP Main frequency: 60 Hz Rated voltage: 1 x 115 V Current in speed 3: 2.15 A Capacitor size - run: 10 µF/180 V Insulation class (IEC 85): F Others: Gross weight: 15 lb	

52722370 UP 43-75 BF 60 Hz

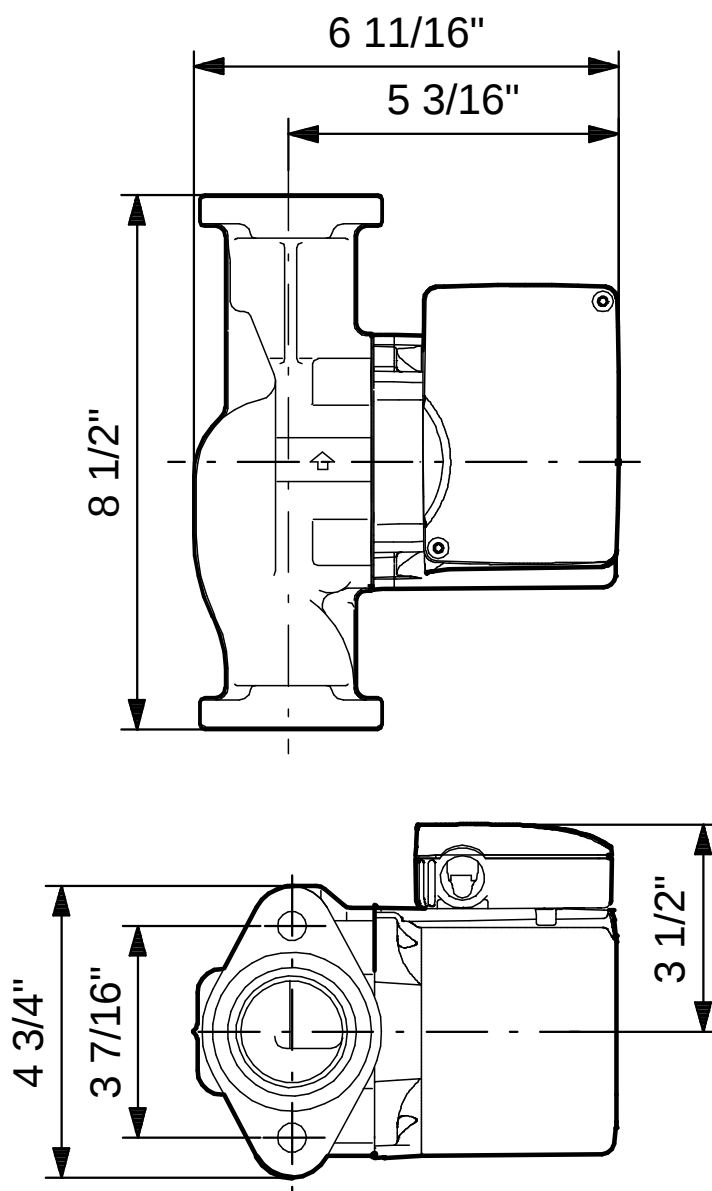

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.