


Position	Count	Description																																										
	1	 Product photo could vary from the actual product Product No.: 96160141 3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing. The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature. The motor is a one-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range. The motor is fitted with a replaceable cable plug. Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Maximum liquid temperature:</td><td>95 °F</td></tr><tr><td>Max liquid temperature at 0.15 m/sec:</td><td>95 °F</td></tr><tr><td>Liquid temp:</td><td>68 °F</td></tr><tr><td>Density:</td><td>62.29 lb/ft³</td></tr></table> Technical: <table><tr><td>Speed for pump data:</td><td>10700 rpm</td></tr><tr><td>Rated flow:</td><td>8.81 US gpm</td></tr><tr><td>Rated head:</td><td>233 ft</td></tr><tr><td>Approvals on nameplate:</td><td>UL, cUL</td></tr><tr><td>Approvals on motor nameplate:</td><td>CE,UL,CUL</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr></table> Materials: <table><tr><td>Pump:</td><td>Polyethylene / Stainless steel</td></tr><tr><td></td><td>DIN W.-Nr. 1.4301</td></tr><tr><td>Motor:</td><td>Stainless steel</td></tr><tr><td></td><td>DIN W.-Nr. 1.4301</td></tr><tr><td></td><td>AISI 304</td></tr></table> Installation: <table><tr><td>Pump outlet:</td><td>NPT 1 1/4</td></tr><tr><td>Minimum borehole diameter:</td><td>2.99 in</td></tr></table> Electrical data: <table><tr><td>Motor type:</td><td>MS3</td></tr><tr><td>Power input - P1:</td><td>1.65 kW</td></tr><tr><td>Rated power - P2:</td><td>1.542 HP</td></tr></table>	Pumped liquid:	Water	Maximum liquid temperature:	95 °F	Max liquid temperature at 0.15 m/sec:	95 °F	Liquid temp:	68 °F	Density:	62.29 lb/ft³	Speed for pump data:	10700 rpm	Rated flow:	8.81 US gpm	Rated head:	233 ft	Approvals on nameplate:	UL, cUL	Approvals on motor nameplate:	CE,UL,CUL	Curve tolerance:	ISO9906:2012 3B	Pump:	Polyethylene / Stainless steel		DIN W.-Nr. 1.4301	Motor:	Stainless steel		DIN W.-Nr. 1.4301		AISI 304	Pump outlet:	NPT 1 1/4	Minimum borehole diameter:	2.99 in	Motor type:	MS3	Power input - P1:	1.65 kW	Rated power - P2:	1.542 HP
Pumped liquid:	Water																																											
Maximum liquid temperature:	95 °F																																											
Max liquid temperature at 0.15 m/sec:	95 °F																																											
Liquid temp:	68 °F																																											
Density:	62.29 lb/ft³																																											
Speed for pump data:	10700 rpm																																											
Rated flow:	8.81 US gpm																																											
Rated head:	233 ft																																											
Approvals on nameplate:	UL, cUL																																											
Approvals on motor nameplate:	CE,UL,CUL																																											
Curve tolerance:	ISO9906:2012 3B																																											
Pump:	Polyethylene / Stainless steel																																											
	DIN W.-Nr. 1.4301																																											
Motor:	Stainless steel																																											
	DIN W.-Nr. 1.4301																																											
	AISI 304																																											
Pump outlet:	NPT 1 1/4																																											
Minimum borehole diameter:	2.99 in																																											
Motor type:	MS3																																											
Power input - P1:	1.65 kW																																											
Rated power - P2:	1.542 HP																																											



Company name:

Created by:


Phone:

Date:

1/7/2016

Position	Count	Description
		Main frequency: 60 Hz Rated voltage: 1 x 200-240 V Start. method: direct-on-line Service factor: 2,05 Rated current: 8.4 A Power factor: 1,00 Rated speed: 10700 rpm Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 4.922 ft

Description	Value
General information:	
Product name:	10 SQ07-200
Product No.:	96160141
EAN:	5700398694182
Price:	On request
Technical:	
Speed for pump data:	10700 rpm
Rated flow:	8.81 US gpm
Rated head:	233 ft
Approvals on nameplate:	UL, cUL
Approvals on motor nameplate:	CE,UL,CUL
Curve tolerance:	ISO9906:2012 3B
Pump Number:	96397371
Stages:	4
Model:	B
Valve:	pump with built-in non-return valve
Materials:	
Pump:	Polyethylene / Stainless steel
	DIN W.-Nr. 1.4301
Motor:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Installation:	
Pump outlet:	NPT 1 1/4
Minimum borehole diameter:	2.99 in
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	95 °F
Max liquid temperature at 0.15 m/sec:	95 °F
Liquid temp:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Motor type:	MS3
Power input - P1:	1.65 kW
Rated power - P2:	1.542 HP
Main frequency:	60 Hz
Rated voltage:	1 x 200-240 V
Start. method:	direct-on-line
Service factor:	2,05
Rated current:	8.4 A
Power factor:	1,00
Rated speed:	10700 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protection:	Y
Thermal protec:	internal
Length of cable:	4.922 ft
Motor Number:	96160536
Controls:	
CU 300/CU 301:	no communication possible

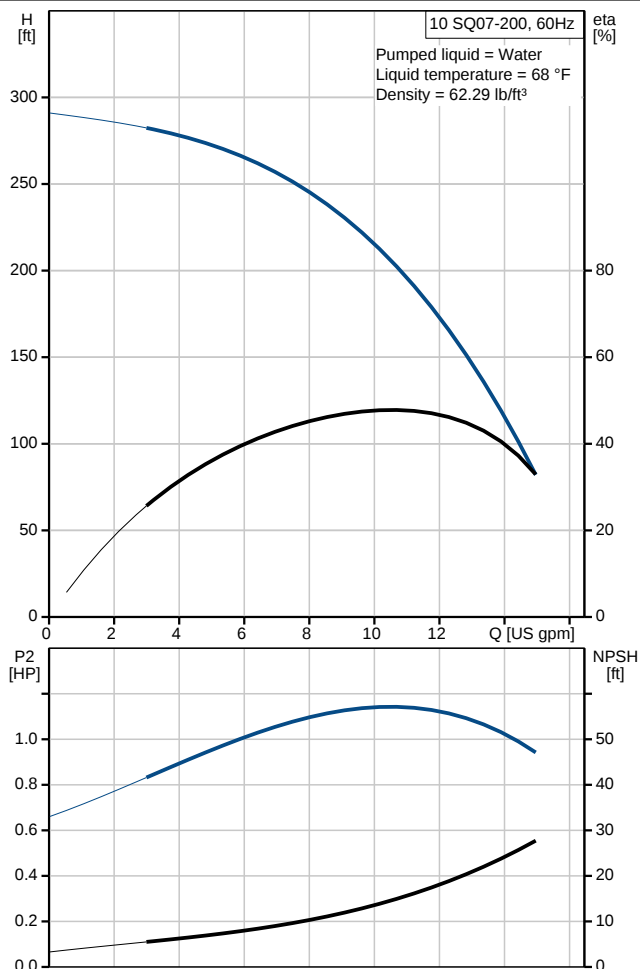



Company name:

Created by:

Phone:

Date: 1/7/2016

Description	Value
Others:	
Sales region:	Namreg