



## ADA Stainless Steel Freeze Resistant Bottle Filler and Drinking Fountain

# model 3611FR

## FEATURES & BENEFITS

### ADA COMPLIANCE

ADA-compliant bottle filling station and dual-height high-low drinking fountain required for wheel chair use, and for the standing person.

### FRONT APPROACH

Face all three water stations frontward and the overall footprint decreases, saving 33% of the hard scape required for access compliance. This also allows the fountain to be placed with its back to within 8 inches of a wall or a fence.

### BOTTLE FILLER

The ADA-compliant open design bottle filling station offers a 17" high bottle area, and open sides making this push button operated bottle filling station more accessible to users.

### FREEZE-RESISTANT VALVE

Fully-engineered system with the pneumatic-operated, freeze-resistant valve installed below frost line to drain water to non-freezing depth allowing fountain to function year round. Assembly can be lifted to surface and lowered back into casing for easy maintenance without disturbing the fountain.

### BUBBLER HEAD

Polished chrome-plated brass bubbler heads with integral 5/8" dia. threaded shank for vandal resistant strength, and top-down access for nozzle replacement or water line service, with .45 gpm flow rate.

### CONSTRUCTION

Heavy-duty stainless steel with silver powder-coated color finish, and stainless-steel drinking fountain bowl. Modular construction allows for easy replacement or rearrangement of drinking fountain bowls and bottle filler modules.

### DRAIN CLEAN-OUT

Polished chrome-plated push-button requires less than 5 lbs. (2.7 kg) of push force to activate.

## OPTIONS

Installation Aid: Model MTG.3600, mounting plate for 3600 series pedestals.

Standard-use version: Model 3611, ADA stainless steel bottle filler and drinking fountain.

For more information, visit [www.hawsc.com](http://www.hawsc.com) or call (888) 640-4297.



## SPECIFICATIONS

Model 3611FR outdoor, freeze-resistant ADA-compliant pedestal mounted bottle filler and drinking fountain shall include a heavy-duty stainless steel pedestal with matte silver powder-coating, fully engineered pneumatic valve assembly, polished chrome-plated brass vandal-resistant shielded bubbler head with integral 5/8" dia. threaded shank and top-down access to renewable nozzle, large-opening bottle filler with quick-fill 1 gpm flow rate, 100% lead-free waterways, polished chrome-plated vandal-resistant waste strainer with top-down clean-out access to the drain, vandal-resistant access plates, integral mounting feet, and 1-1/2" slip waste.


REQUIRES MODEL 6518.2FR PRICED SEPARATELY.

## APPLICATIONS


The 3611FR offers a solution for the changing needs of outdoor settings as well as outdoor wheelchair access, appealing to all users through accessibility and safety. This product is ideal in areas such as parks, schools, and other outdoor areas where hydration facilities are needed. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: Q ≤ 1.



NOTES:  
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. INSTALL A TRAP IN THE WASTE LINE AND A SCREWDRIVER STOP IN THE SUPPLY LINE IF REQUIRED.

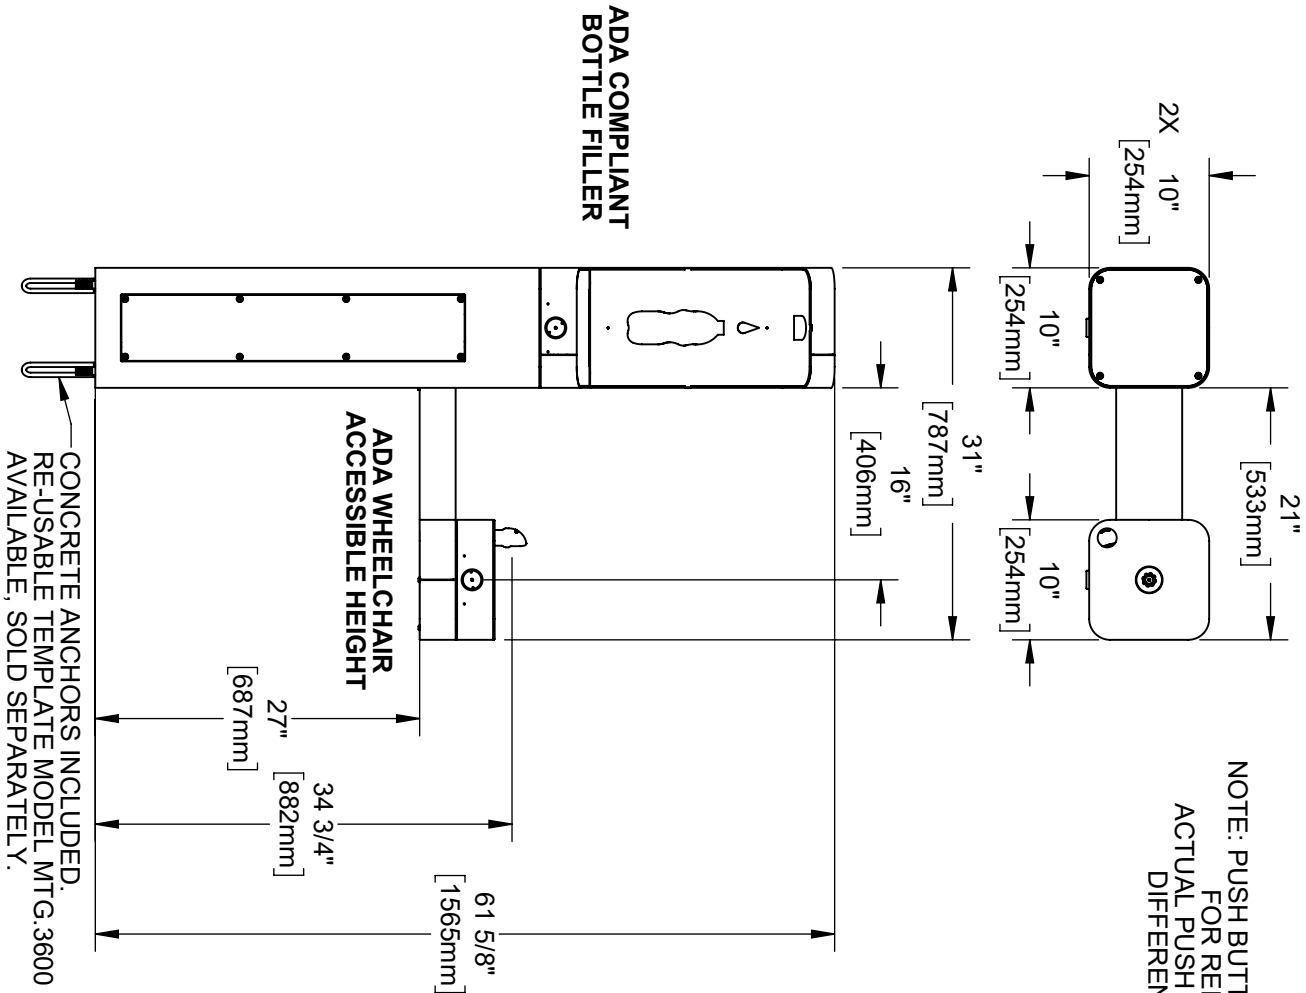

NOTE: PUSH BUTTONS SHOWN ARE FOR REF. ONLY, ACTUAL PUSH BUTTONS ARE DIFFERENT STYLE.

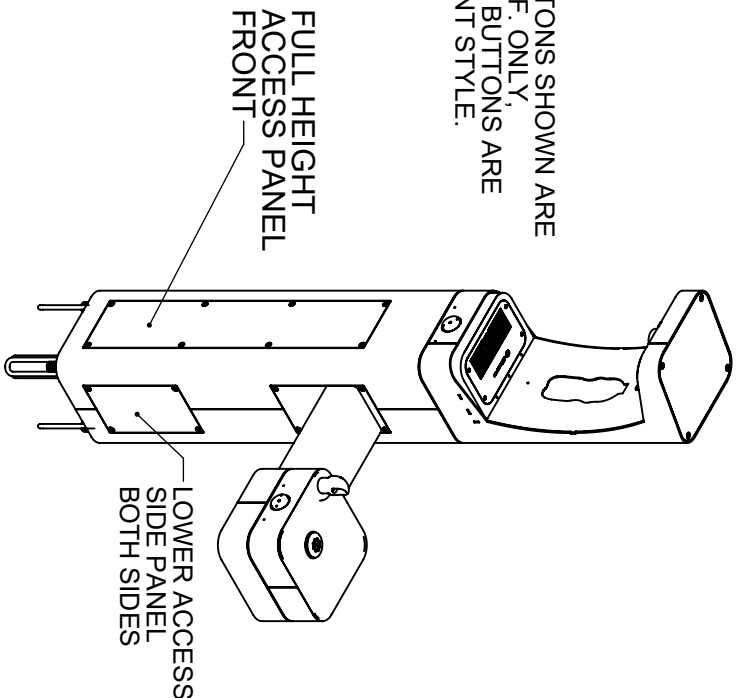

HAWS MODEL 3611FR IS FULLY COMPLIANT WITH THE FEDERAL 2010 AMERICANS WITH DISABILITIES ACT (ADA) ACCESSIBILITY REQUIREMENTS WHEN INSTALLED AS SHOWN HERE AND WHEN INSTALLED WITH PROPER CLEARANCES AND ACCESS. LOCATE THE PEDESTAL BASE WITH AT LEAST 8" OF CLEAR UNOBSTRUCTED HARDSCAPE BEHIND THE PEDESTAL. IT IS THE RESPONSIBILITY OF THE INSTALLER TO ADHERE TO LOCAL, STATE, AND FEDERAL CODES WHEN INSTALLING THIS UNIT. DISTANCE TO SURROUNDING OBJECTS, APPROACH SURFACES, ETC. SHOULD BE CONSIDERED.




1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM


|              |                  |                  |                            |
|--------------|------------------|------------------|----------------------------|
| ECN: 5652    | REV: ECU: BY: FV | MODEL(S): 3611FR | PART NUMBER: 0560001171 D  |
| DRAWING: 1   | DATE: 5/7/19     | CHRD: 1          | REVISION: 2                |
| APPROVED: FV | DATE: 09/16/21   | SCALE: 1/24      | DRAWING TYPE: INSTALLATION |
| SIZE: A      |                  | SHEET 1 OF 7     |                            |

**MODEL MTG.3600**

(OPTIONAL)  
TEMPLATE FOR  
SPACING ANCHORS  
DURING CONCRETE  
POUR




## INSTALLATION INSTRUCTIONS

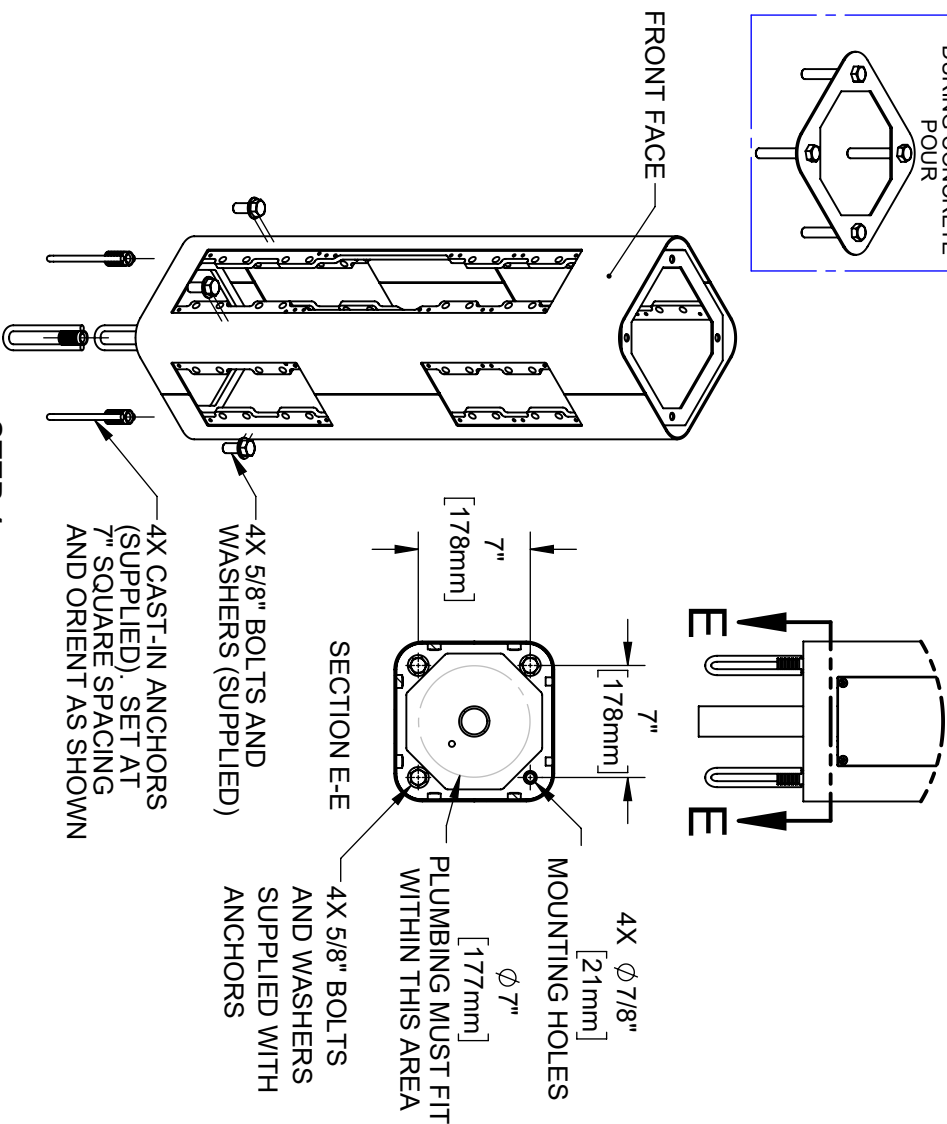

### STEP 1

MOUNT PEDESTAL TO CONCRETE SLAB IN DESIRED ORIENTATION. SLAB TO BE 30" MINIMUM SQUARE AND 6" MINIMUM THICK (BY OTHERS). PLUMBING CAST IN CONCRETE MUST FIT IN 7" DIAMETER AREA CENTERED UNDER PEDESTAL LOCATION. FOR 3611FR MODEL, SEE REQUIRED BURY VALVE (NOT SUPPLIED) INSTALLATION REQUIREMENTS ON SHEET 6.

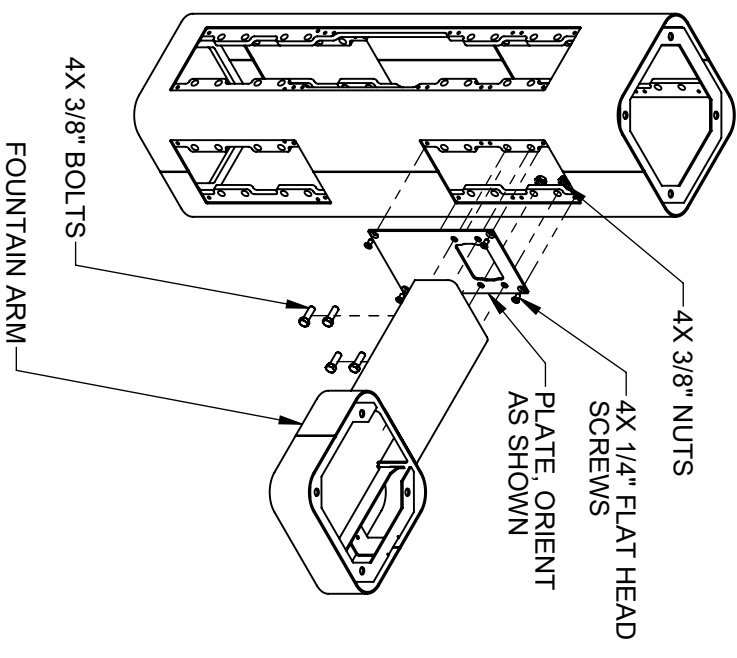

### STEP 2


REMOVE BOTTOM COVER PLATES FROM ARMS BY REMOVING 3 1/4" BUTTON HEAD SCREWS. INSTALL ONE FOUNTAIN ARM ON RIGHT SIDE AS SHOWN. USE 1/4" FLAT HEAD SCREWS (SUPPLIED) TO INSTALL PLATE. USE 3/8" BOLTS AND NUTS (SUPPLIED) AND TORQUE TO 18 FT-LBS TO INSTALL ARM.



1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

| ECN      | REV      | ECN   | BY   | MODEL(S)     | PART NUMBER  |
|----------|----------|-------|------|--------------|--------------|
| 5652     | 5/7/9    | FV    |      | 3611FR       | 0560001171.D |
| DRAWN    | DATE     | CHKD  |      |              | REVISION     |
| 5/7/9    | 5/7/9    | BLM   |      |              | 2            |
| APPROVED | DATE     | SCALE | 1/24 | DRAWING TYPE | INSTALLATION |
| FV       | 09/16/21 | SIZE  | A    | SHEET        | 2 OF 7       |

# INSTALLATION INSTRUCTIONS

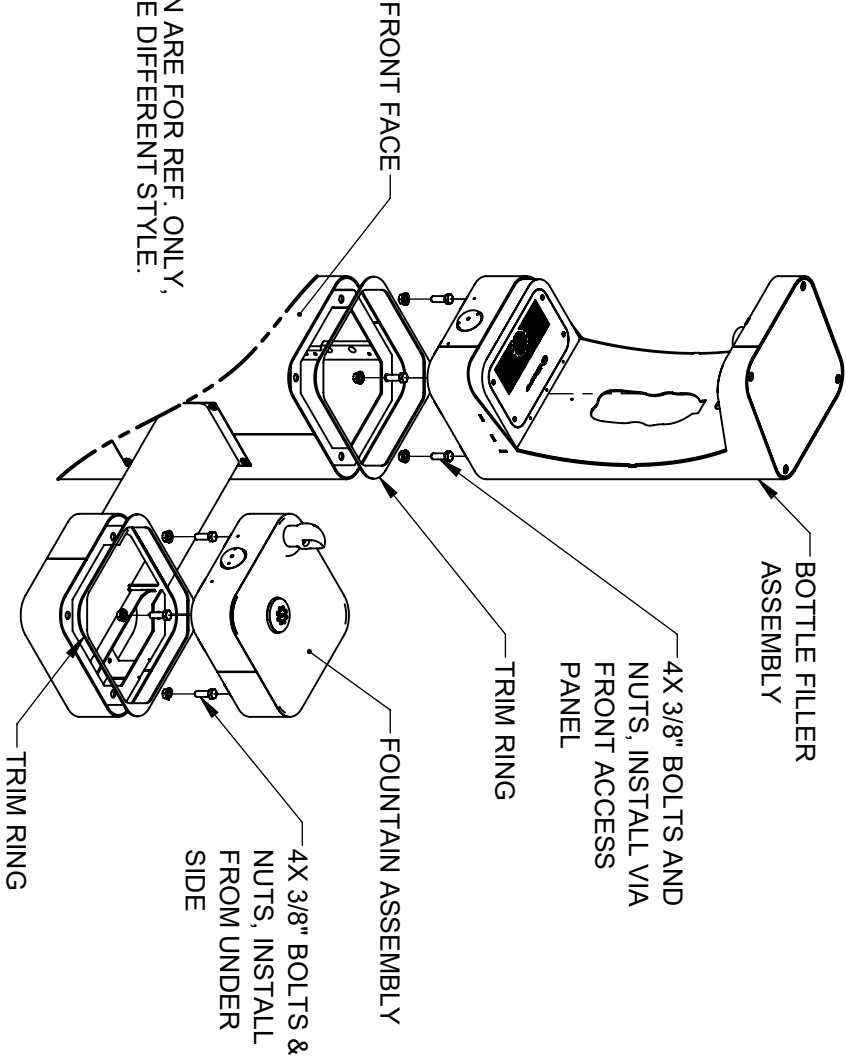

## STEP 3


PLACE SQUARE TRIM RING ON BOTTOM OF BOTTLE FILLER AND PLACE BOTTLE FILLER ON TOP OF PEDESTAL, FACING THE FRONT. USE 3/8" BOLTS AND NUTS VIA THE FRONT ACCESS PANEL TO SECURE BOTTLE FILLER TO PEDESTAL. PLACE TRIM RING AND INSTALL FOUNTAIN ON ARM AS SHOWN. CAREFULLY CENTER BOTTLE FILLER, FOUNTAIN, AND TRIM RINGS, THEN TORQUE BOLTS/NUTS TO 18 FT-LBS



1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

|          |          |       |      |              |              |
|----------|----------|-------|------|--------------|--------------|
| ECN      | REV/ECN  | BY    | FV   | MODEL(S)     | PART NUMBER  |
| 5652     | 5/7/9    | FV    |      | 3611FR       | 0560001171.D |
| DRAWING  | DATE     | CHKD  |      |              | REVISION     |
| 5652     | 5/7/9    | BM    |      |              | 2            |
| APPROVED | DATE     | SCALE | 1/24 | DRAWING TYPE | INSTALLATION |
| FV       | 09/16/21 |       |      | SIZE         | A            |
|          |          |       |      |              | SHEET 3 OF 7 |

# INSTALLATION INSTRUCTIONS

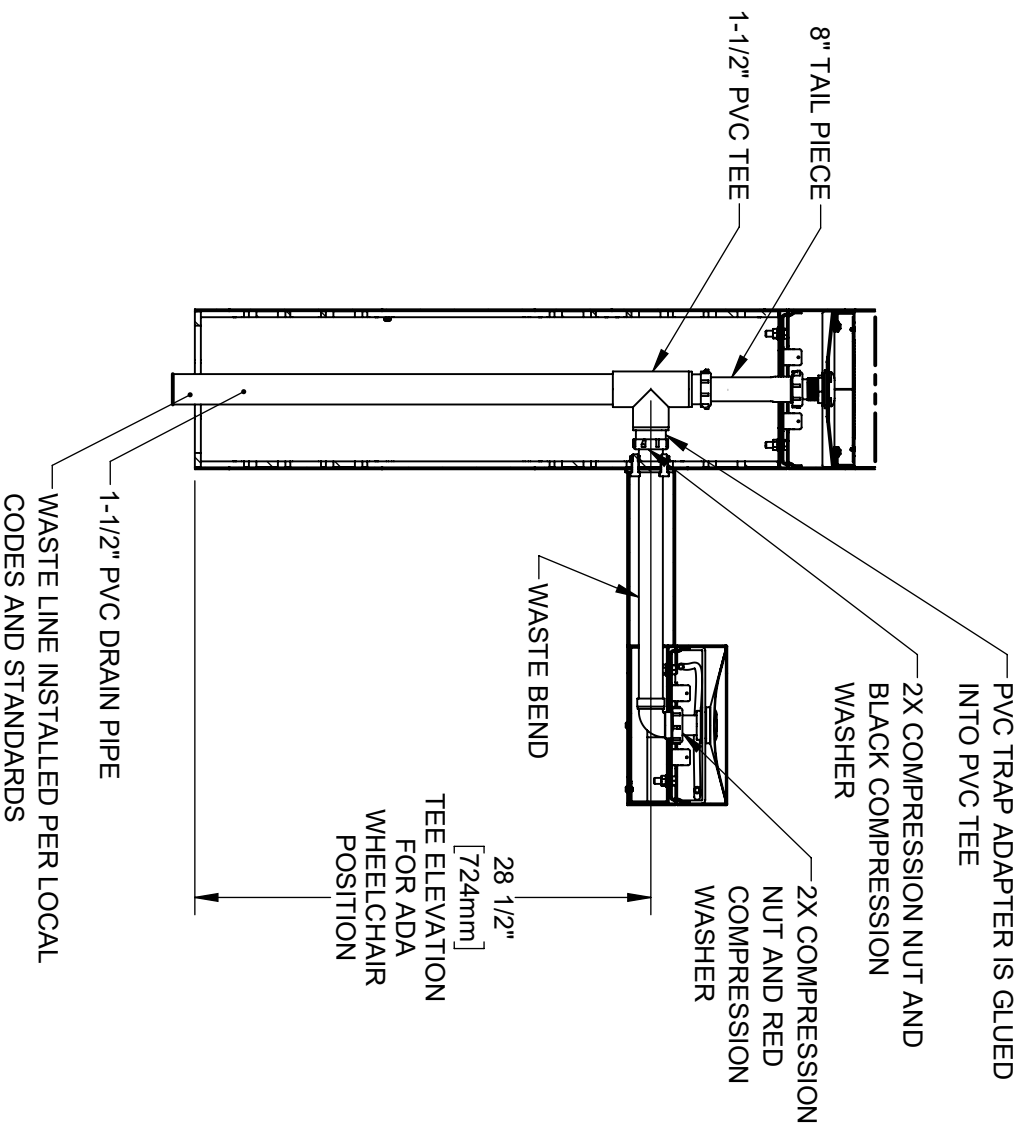

## STEP 4


INSTALL SUPPLIED DRAIN COMPONENTS AS SHOWN. RED COMPRESSION WASHERS ADAPT FROM 1-1/4" TO 1-1/2" AT EACH DRAIN TAIL PIECE. BLACK COMPRESSION WASHERS ARE USED IN TRAP ADAPTERS AT TEE. USE APPROPRIATE PVC CEMENT TO MAKE SOLVENT CEMENT CONNECTIONS. TRIM WASTE BEND AND/OR TAIL PIECE LENGTH IF REQUIRED. NOTE THAT EXTRA PARTS MAY BE INCLUDED TO FACILITATE OTHER CONFIGURATIONS OF THIS FOUNTAIN.



1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

|                |                |             |                            |         |              |
|----------------|----------------|-------------|----------------------------|---------|--------------|
| ECN: 5652      | REV/ECN: F.V.  | BY: F.V.    | MODEL(S)                   | 3611FR  | PART NUMBER  |
| DRAWN: 8/12/20 | DATE: 5/7/19   | CHKD: B.M.  |                            |         | 0560001171.D |
| APPROVED: F.V. | DATE: 09/16/21 | SCALE: 1/2" | DRAWING TYPE: INSTALLATION | SIZE: A | REVISION     |
|                |                |             |                            |         | 2            |

# INSTALLATION INSTRUCTIONS

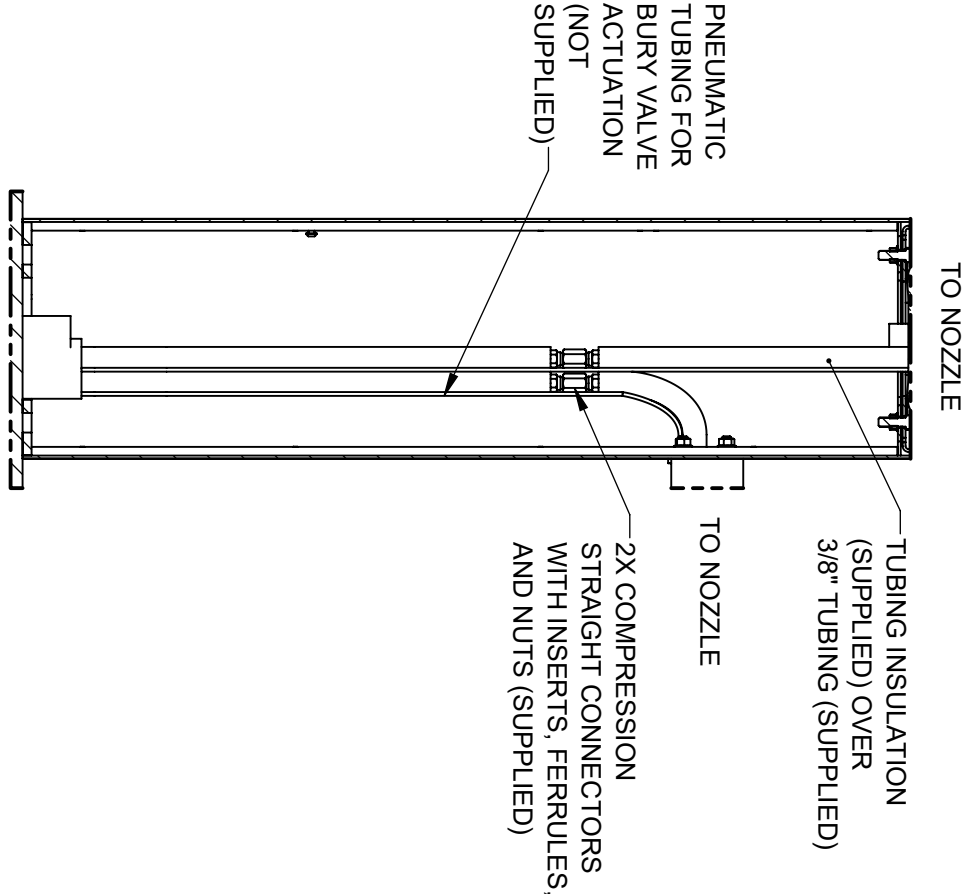

FROM BURY VALVES  
(NOT SUPPLIED)


## 3611FR SUPPLY PLUMBING\*

### STEP 5

COMPLETE WATER SUPPLY PLUMBING AS SHOWN. OPEN SUPPLY VALVE(S) AND TEST. REPLACE ARM BOTTOM PLATE AND PEDESTAL ACCESS PLATES. BURY VALVES (NOT SUPPLIED) ARE REQUIRED FOR 3611FR INSTALLATION. REFER TO BURY VALVE OPERATION AND MAINTENANCE MANUAL FOR ADDITIONAL INFORMATION.

\* SEE NEXT SHEET OF THIS DRAWING  
FOR MORE INFORMATION ON INSTALLING  
BURY VALVES WITH THIS MODEL.

|                                                                                     |                 |                                                                                                                                       |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
|  |                 | 1455 KLEPPE LANE<br>SPARKS, NEVADA 89431<br>(775) 359-4712 FAX (775) 359-7424<br>E-MAIL: HAWS@HAWS.CO.COM<br>WEBSITE: WWW.HAWS.CO.COM |                           |
| ECN: 5652                                                                           | REV/ECN: BY: FV | MODEL(S): 3611FR                                                                                                                      | PART NUMBER: 0560001171.D |
| DRAWN: 5/7/9                                                                        | DATE: 5/7/9     |                                                                                                                                       | REVISION: 2               |
| APPROVED: 09/16/21                                                                  | SCALE: 1/24     | DRAWING TYPE: INSTALLATION                                                                                                            | SHEET 5 OF 7              |

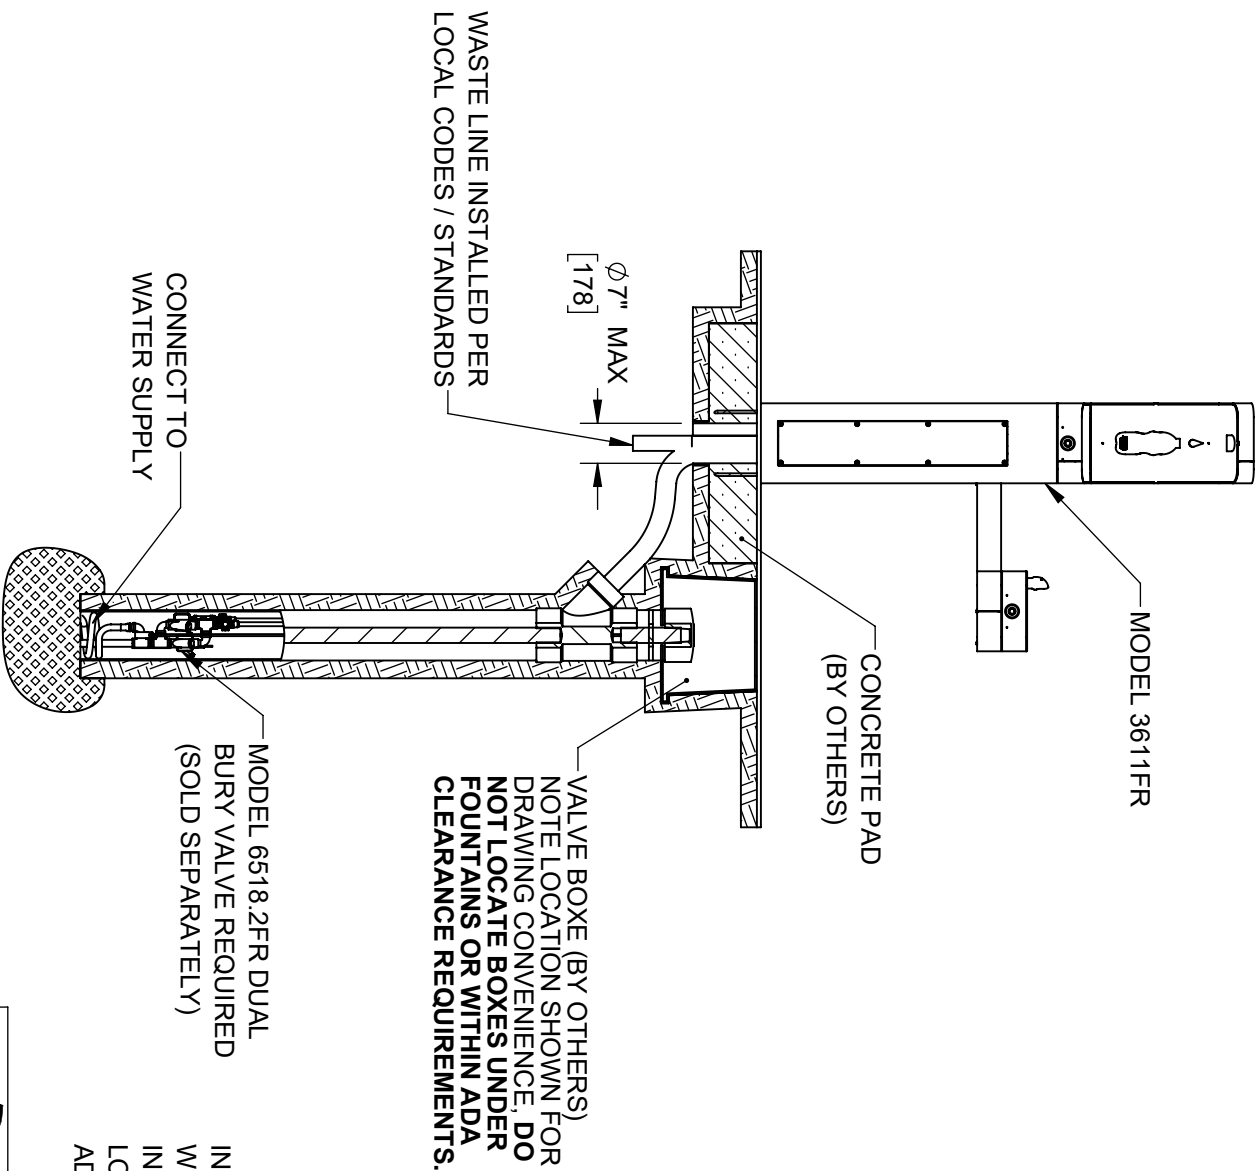

INSTALL BURY VALVES IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. INSTALLATION MUST COMPLY WITH LOCAL CODES / STANDARDS, INCLUDING ADA CODES IF APPLICABLE.

**3611FR GENERAL BURY  
VALVE LAYOUT  
(FOR REFERENCE ONLY)**




1456 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

|           |           |        |               |              |
|-----------|-----------|--------|---------------|--------------|
| ECN:      | REV. ECN: | BY:    | MODEL(S)      | PART NUMBER  |
| 5652      | 5719      | F.V.   | 3611FR        | 0560001171.D |
| DRAWN:    | DATE:     | CHKD:  |               | REVISION     |
| 8/1/20    | 8/1/20    | BLM    |               | 2            |
| APPROVED: | DATE:     | SCALE: | DRAWING TYPE: | INSTALLATION |
| F.V.      | 09/16/21  | 1/24   |               | SIZE: A      |
|           |           |        |               | SHEET 6 OF 7 |

NOTES ON OPTIONAL CONFIGURATIONS

HAWES 3600FR SERIES OUTDOOR FOUNTAINS ARE MODULAR AND CAN BE ASSEMBLED AND CONFIGURED MANY DIFFERENT WAYS. DISPLAYED HERE ARE A FEW EXAMPLES. CONFIGURATIONS OTHER THAN THAT SHOWN IN THE INSTALLATION INSTRUCTIONS FOR THE 3611FR MAY AFFECT COMPLIANCE WITH ADA REGULATIONS. IT IS THE RESPONSIBILITY OF THE INSTALLER TO UNDERSTAND LOCAL, STATE, AND FEDERAL REGULATIONS AS APPLICABLE IF INSTALLING THIS FOUNTAIN IN CONFIGURATIONS OTHER THAN THAT INDICATED ON SHEET 1 (PAGE 6 OF 12).


BOTTLE FILLER AND FOUNTAINS CAN BE INSTALLED TO FACE ANY DIRECTION

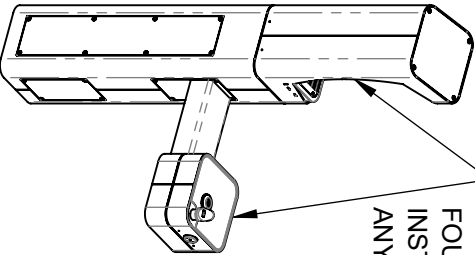

| ADA ARM HEIGHT POSITION OPTIONS |            |             |                         |                       |
|---------------------------------|------------|-------------|-------------------------|-----------------------|
|                                 | LEFT SIDE* | RIGHT SIDE* | ARM HEIGHT (LOWER EDGE) | BUBBLER NOZZLE HEIGHT |
| STANDING ADA                    | YES (STD)  | NO          | 31-7/8 [809 mm]         | 39-3/8 [999 mm]**     |
| WHEELCHAIR ADA                  | YES        | YES (STD)   | 27 [687 mm]             | 34-5/8 [878 mm]       |
| CHILD ADA                       | YES        | YES         | 22-1/4 [566 mm]         | 29-7/8 [757 mm]       |


\* RIGHT AND LEFT CAN BE REVERSED IF PEDESTAL IS ROTATED 180°.

\*\*NOZZLE HEIGHT IS 41-1/2" WHEN FOUNTAIN IS INSTALLED ON TOP OF PEDESTAL.

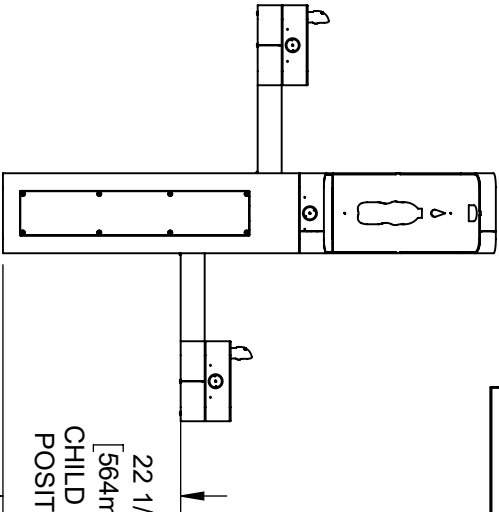

NOTE: PUSH BUTTONS SHOWN ARE FOR REF. ONLY, ACTUAL PUSH BUTTONS ARE DIFFERENT STYLE.

BOTTLE FILLER CAN BE INSTALLED ON ARMS

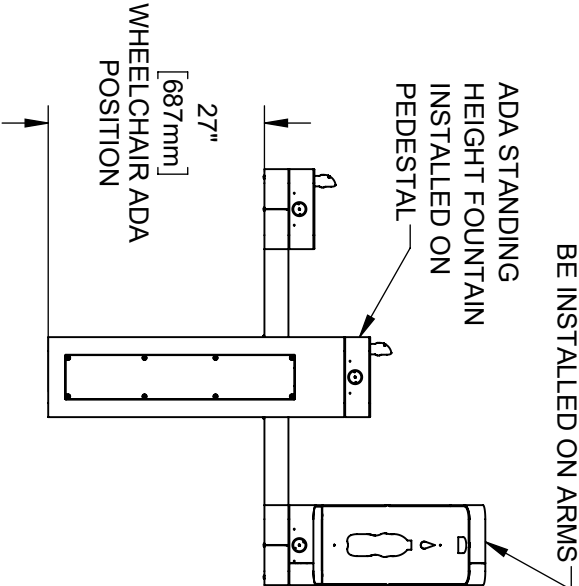

1456 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (775) 359-7424  
E-MAIL: HAWES@HAWESCO.COM  
WEBSITE: WWW.HAWESCO.COM

|              |                  |             |                            |                           |
|--------------|------------------|-------------|----------------------------|---------------------------|
| ECN: 5652    | REV/ECN: 5719    | BY: FV      | MODEL(S): 3611FR           | PART NUMBER: 0560001171.D |
| DRAWN: BDM   | DATE: 07/12/2019 | CHKD: BDM   |                            | REVISION: 2               |
| APPROVED: FV | DATE: 09/16/21   | SCALE: 1/2" | DRAWING TYPE: INSTALLATION | SHEET 7 OF 7              |