



model 3690

Bottle Filler Attachment

FEATURES & BENEFITS

STAINLESS STEEL VALVE

The push-button activated valve offers the only all stainless steel valve body that is machined out of solid bar stock, is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer, and with front access to the water stream height adjustment for easy maintenance without having to remove the valve. Operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

BOTTLE FILLER

The ADA-compliant open design bottle filling station offers a 17" high bottle area, and open sides making this push button operated bottle filling station more accessible to users

FOUNTAIN PUSH BUTTON

All chrome plated brass push button resists vandalism by allowing it to spin without unscrewing.



OPTIONS

- Replacement Nozzle for Modular Bottle Filler: The Haws VRKNOZ1 is a package of ten replacement nozzles for the Haws 3600 series bottle filler. Not for freeze resistant models.

For more information, visit www.hawscos.com or call (888) 640-4297.

SPECIFICATIONS

Model 3690 heavy-duty bottle filler shall include a patented push-button stainless steel valve assembly allowing for front access stream adjustment as well as cartridge and strainer access, large-opening bottle filler with quick-fill 1 gpm flow rate, heavy-duty 3/16" fabricated stainless steel with silver powder-coated finish, stainless steel drain plate, 100% lead-free waterways, polished chrome-plated vandal-resistant waste strainer, and vandal-resistant access plate. Designed to be used with the Haws 3600 series modular outdoor pedestals.



APPLICATIONS

The 3690 offers a solution for the changing needs of outdoor settings as well as outdoor wheelchair access, appealing to all users through accessibility and safety. When paired with a 3600 series pedestal, this is ideal in areas such as parks, schools, and other outdoor areas where hydration facilities are needed. Certified by CSA to NSF/ANSI 61, section 9 and NSF/ANSI 372; and was evaluated to be compliant to US and Canada Plumbing Codes including Uniform Plumbing Code (UPC), International Plumbing Code (IPC) and National Plumbing Code of Canada (NPC) by CSA. Complies with Prop 65.



NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. INSTALL A TRAP IN THE WASTE LINE AND A SCREWDRIVER STOP IN THE SUPPLY LINE IF REQUIRED.

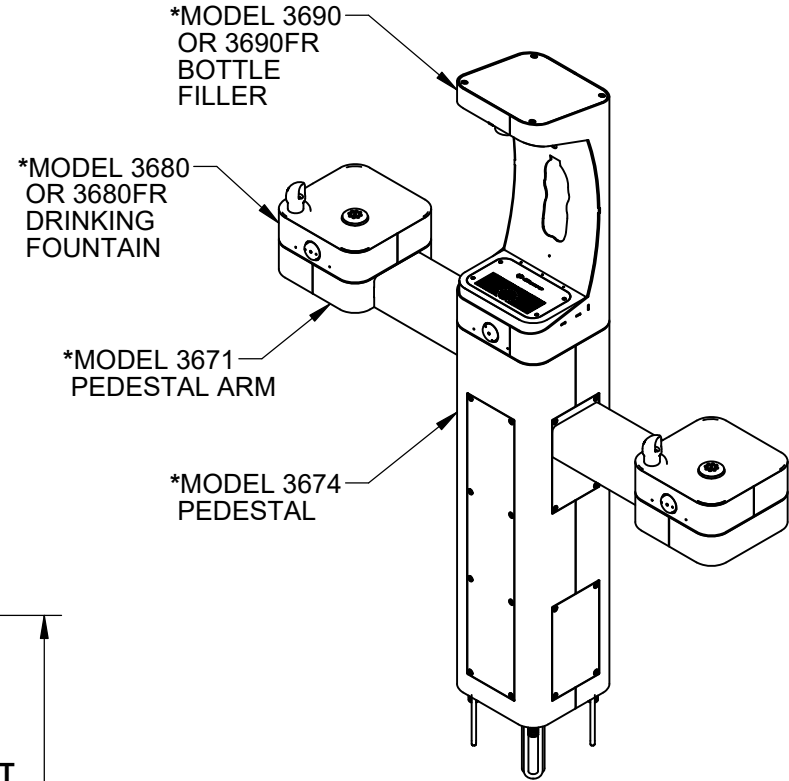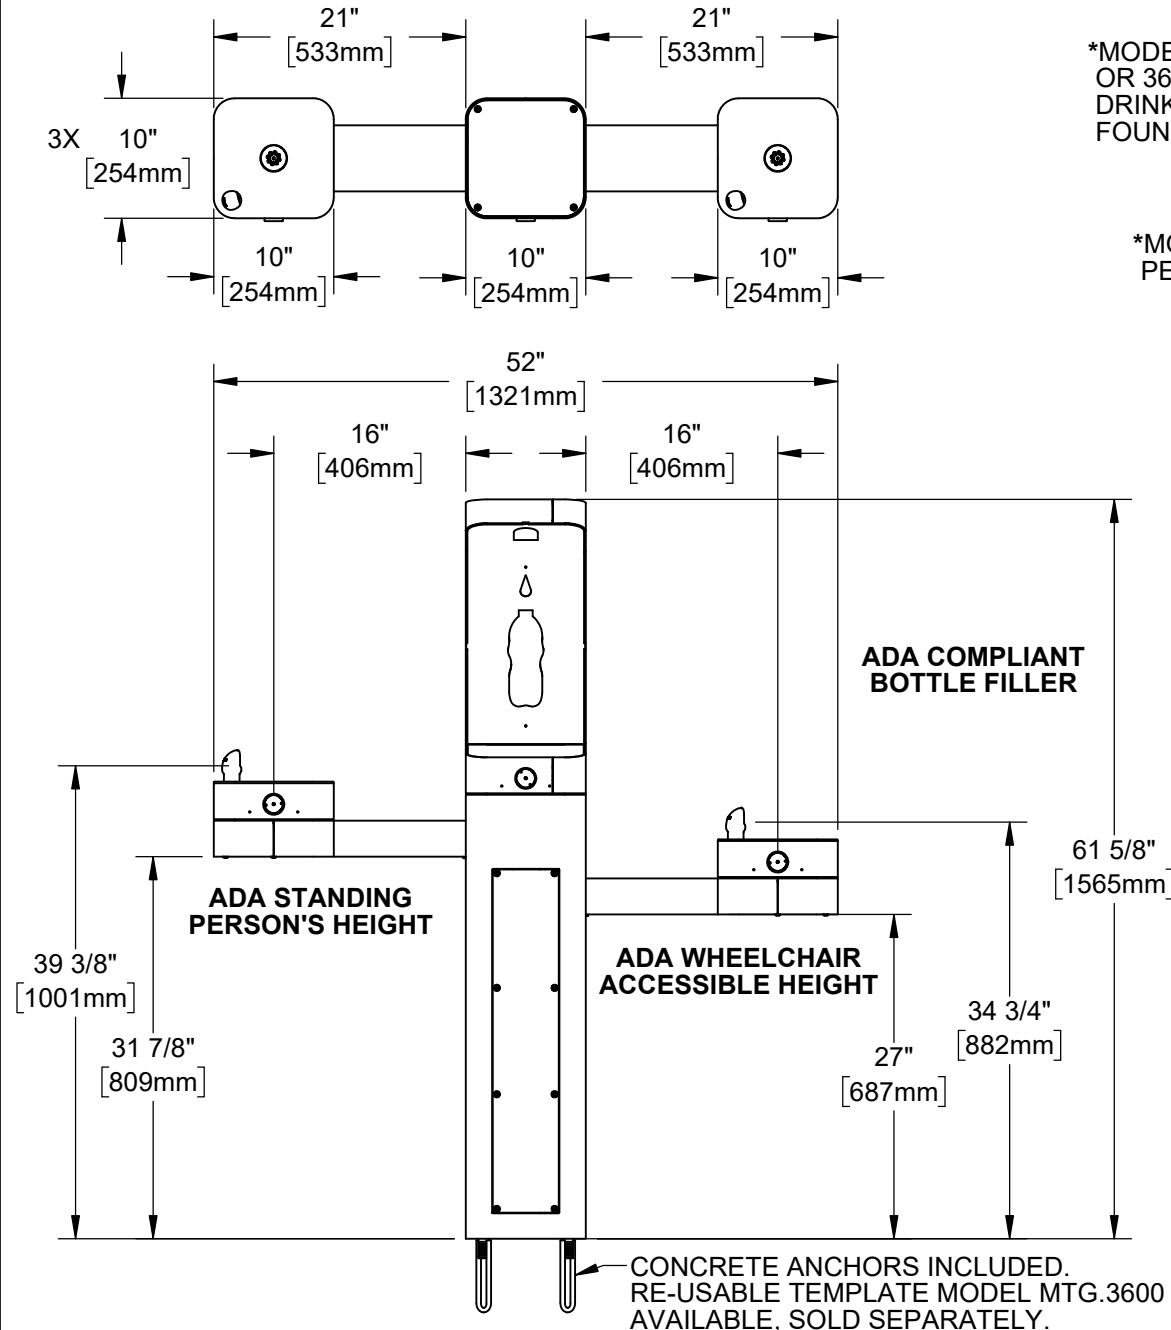

HAWS MODEL 36XX SERIES MODULAR OUTDOOR FOUNTAINS CAN BE FULLY COMPLIANT WITH THE FEDERAL 2010 AMERICANS WITH DISABILITIES ACT (ADA) ACCESSIBILITY REQUIREMENTS WHEN INSTALLED AS SHOWN HERE AND WHEN INSTALLED WITH PROPER CLEARANCES AND ACCESS. LOCATE THE PEDESTAL BASE WITH AT LEAST 8" OF CLEAR UNOBSTRUCTED HARDSCAPE BEHIND THE PEDESTAL. IT IS THE RESPONSIBILITY OF THE INSTALLER TO ADHERE TO LOCAL, STATE, AND FEDERAL CODES WHEN INSTALLING THIS UNIT. DISTANCE TO SURROUNDING OBJECTS, APPROACH SURFACES, ETC. SHOULD BE CONSIDERED.

***MODELS ARE SHOWN ASSEMBLED FOR REFERENCE ONLY. MUST BE PURCHASED SEPARATELY.**




1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S): 3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	PART NUMBER: 0580001176
DRAWN: DHP	DATE: 6/11/20	CHKD: FV		REVISION: 1
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	SHEET 1 OF 7


INSTALLATION INSTRUCTIONS

MODEL MTG.3600

(OPTIONAL)
TEMPLATE FOR
SPACING ANCHORS
DURING CONCRETE
POUR





MODEL 3674
PEDESTAL

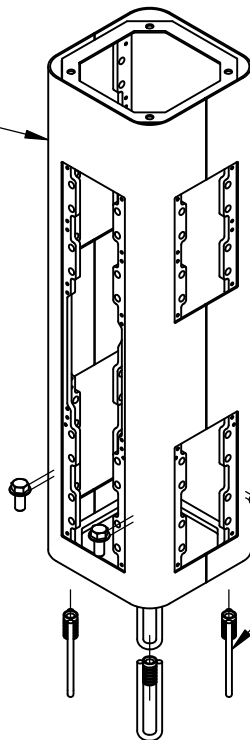

MODEL 3674

MOUNT PEDESTAL TO CONCRETE SLAB IN DESIRED ORIENTATION. SLAB TO BE 30" MINIMUM SQUARE AND 6" MINIMUM THICK (BY OTHERS). PLUMBING CAST IN CONCRETE MUST FIT IN 7" DIAMETER AREA CENTERED UNDER PEDESTAL LOCATION. FOR 36XXFR MODELS, SEE REQUIRED BURY VALVE (NOT SUPPLIED) INSTALLATION REQUIREMENTS ON SHEET 6.

NOTE: ALL PEDESTAL COVER PLATES INCLUDED.



SECTION E-E

4X $\phi 7/8"$
[21mm]
MOUNTING HOLES

$\phi 7"$
[177mm]
PLUMBING MUST FIT
WITHIN THIS AREA

4X 5/8" BOLTS AND
WASHERS (SUPPLIED)


4X CAST-IN ANCHORS
(SUPPLIED). SET AT
7" SQUARE SPACING
AND ORIENT AS SHOWN

4X 5/8" BOLTS
AND WASHERS
SUPPLIED WITH
ANCHORS

MODEL 3674
(REFERENCE)

*FOUNTAIN AT
ADA WHEELCHAIR
HEIGHT

*FOUNTAIN AT
ADA CHILD
HEIGHT

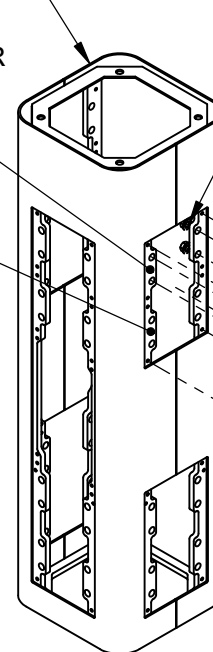

4X 3/8" BOLTS
(SUPPLIED)

MODEL 3671

4X 3/8" NUTS
SUPPLIED

4X 1/4" FLAT HEAD
SCREWS
(SUPPLIED)

PLATE, ORIENT
AS REQUIRED
FOR DESIRED
HEIGHT*
(SUPPLIED)

MODEL 3671 (SHOWN RIGHT SIDE)


REMOVE BOTTOM COVER PLATES FROM ARM BY REMOVING 3 1/4" BUTTON HEAD SCREWS. INSTALL PEDESTAL ARM ON EITHER SIDE. MOUNTING PLATE CAN BE ORIENTED AS REQUIRED FOR DESIRED FOUNTAIN OR BOTTLE FILLER HEIGHT. USE 1/4" FLAT HEAD SCREWS (SUPPLIED) TO INSTALL PLATE. USE 3/8" BOLTS AND NUTS (SUPPLIED) AND TORQUE TO 18 FT-LBS TO INSTALL ARM.



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM


ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S) 3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	PART NUMBER 0580001176
DRAWN: DHP	DATE: 6/11/20	CHKD: FV		REVISION 1
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	SIZE: A
				SHEET 2 OF 7

INSTALLATION INSTRUCTIONS

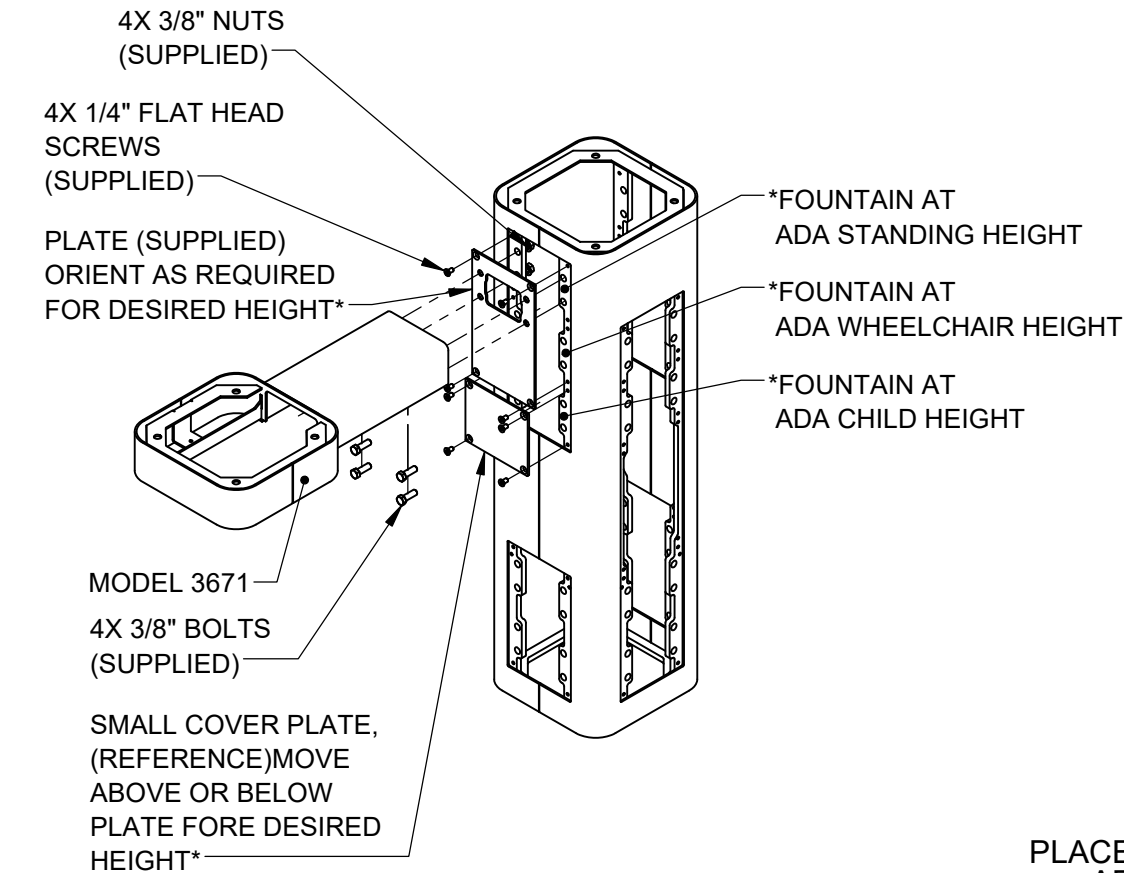

MODEL 3671 (SHOWN LEFT SIDE)

REMOVE BOTTOM COVER PLATES FROM ARM BY REMOVING 3 1/4" BUTTON HEAD SCREWS. INSTALL PEDESTAL ARM ON EITHER SIDE. MOUNTING PLATE CAN BE ORIENTED AS REQUIRED FOR DESIRED FOUNTAIN OR BOTTLE FILLER HEIGHT. USE 1/4" FLAT HEAD SCREWS (SUPPLIED) TO INSTALL PLATE. USE 3/8" BOLTS AND NUTS (SUPPLIED) AND TORQUE TO 18 FT-LBS TO INSTALL ARM.

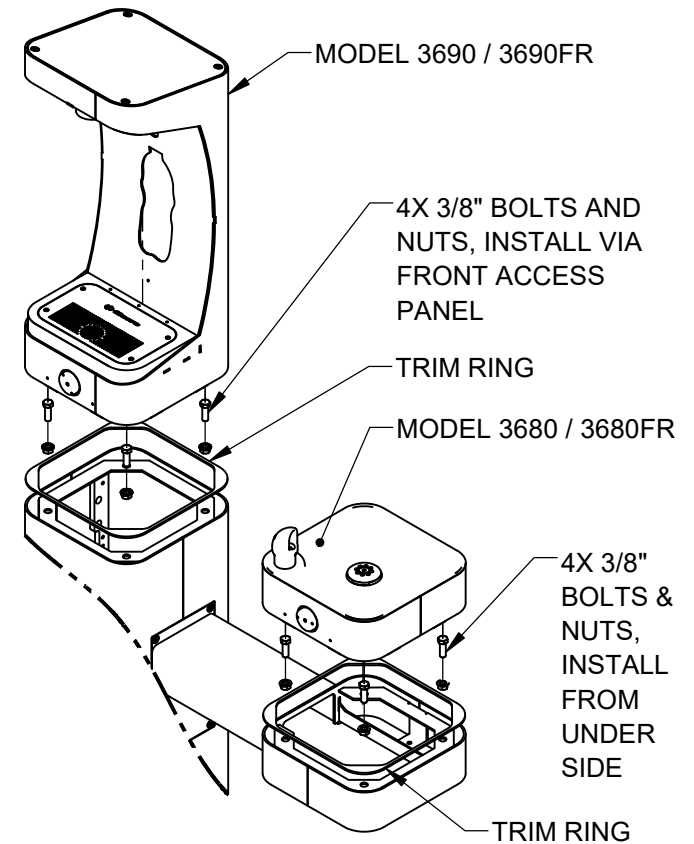

3680 / 3680FR / 3690 / 3690FR


PLACE SUPPLIED SQUARE TRIM RING ON PEDESTAL OR ARM. PLACE MODEL 3680/3680FR FOUNTAIN OR 3690/3690FR BOTTLE FILLER ON PEDESTAL OR ARM(S) ORIENTED AS DESIRED AND SECURE LOOSELY WITH SUPPLIED 3/8" BOLTS AND NUTS AS SHOWN. CAREFULLY CENTER TRIM RING AND MODEL AND TIGHTEN BOLTS/NUTS TO 18 FT-LBS. **NOTE: IT IS POSSIBLE TO ASSEMBLE THESE COMPONENTS SUCH THAT THE RESULT DOES NOT MEET ADA OR OTHER REQUIREMENTS. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO.**



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSO.COM
WEBSITE: WWW.HAWSO.COM

ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S)	PART NUMBER
DRAWN: DHP	DATE: 6/11/20	CHKD: FV	3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	0580001176
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	REVISION
			SIZE: A	1
				SHEET 3 OF 7

INSTALLATION INSTRUCTIONS

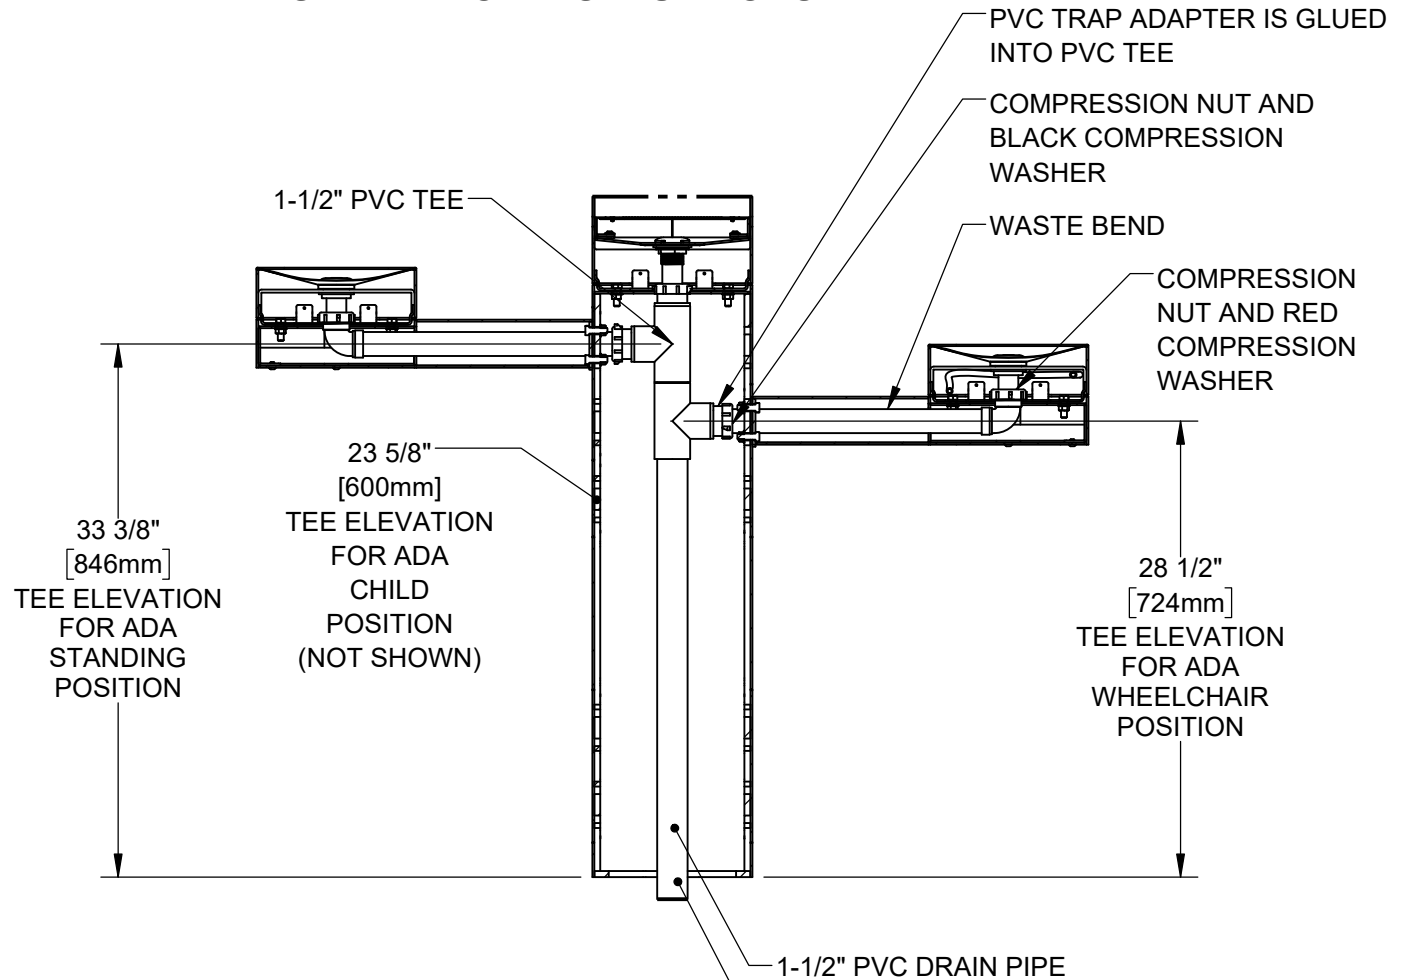

TYPICAL DRAIN INSTALLATION


INSTALL SUPPLIED DRAIN COMPONENTS AS SHOWN. RED COMPRESSION WASHERS ADAPT FROM 1-1/4" TO 1-1/2" AT EACH DRAIN TAIL PIECE. BLACK COMPRESSION WASHERS ARE USED IN TRAP ADAPTERS AT TEES. INCLUDED TRAP ADAPTERS MUST BE CEMENTED INTO PVC FITTINGS WHERE A WASTE BEND OR TAILPIECE ENTERS A 1-1/2" PVC FITTING (TEE OR COUPLER). CUT A SHORT SECTION OF THE DRAIN PIPE TO CONNECT THE TWO TEES IF REQUIRED. USE APPROPRIATE PVC CEMENT TO MAKE SOLVENT CEMENT CONNECTIONS. TRIM WASTE BEND AND/OR TAIL PIECE LENGTH IF REQUIRED. NOTE THAT EXTRA PARTS MAY BE INCLUDED TO FACILITATE DIFFERENT CONFIGURATIONS OF THIS FOUNTAIN.



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S)	PART NUMBER
DRAWN: DHP	DATE: 8/11/20	CHKD: FV	3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	0580001176
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	REVISION
			SIZE: A	1
				SHEET 4 OF 7


INSTALLATION INSTRUCTIONS

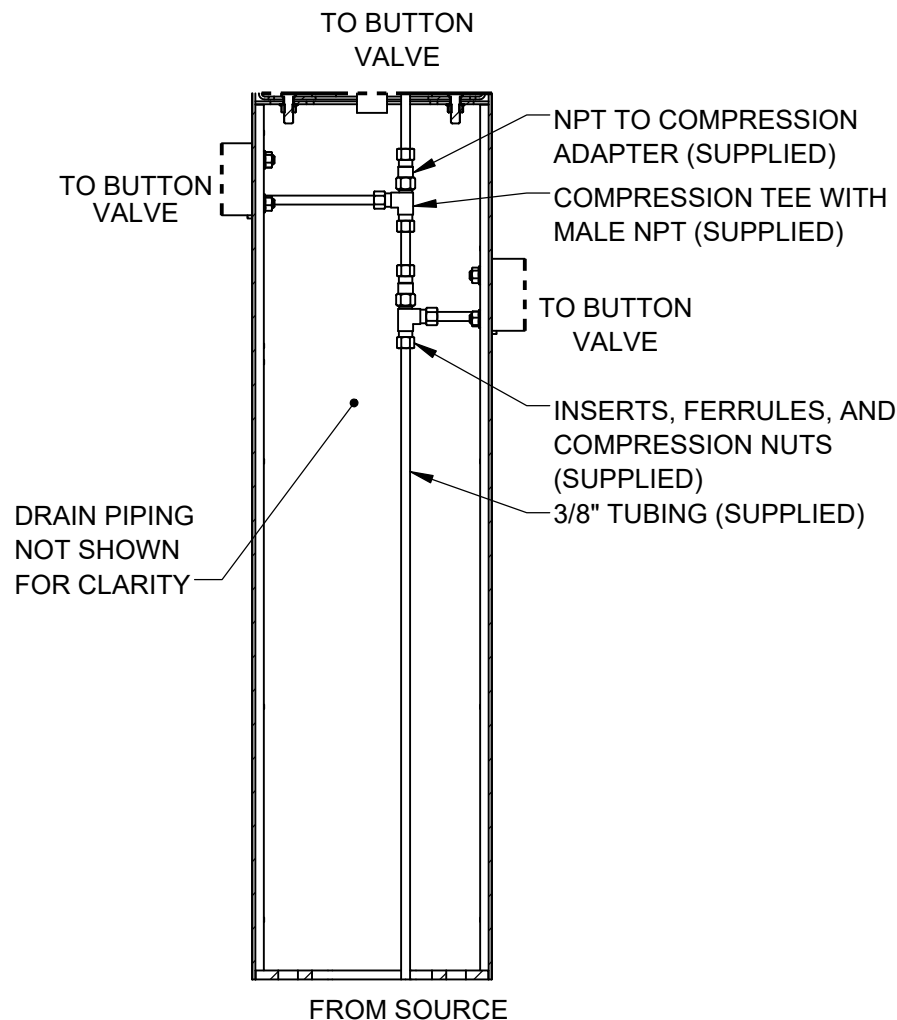

**36XX TYPICAL SUPPLY PLUMBING
NON FREEZE RESISTANT**

TYPICAL SUPPLY PLUMBING


COMPLETE WATER SUPPLY PLUMBING AS REQUIRED. OPEN SUPPLY VALVE(S) AND TEST. REPLACE ARM BOTTOM PLATES AND PEDESTAL ACCESS PLATES. BURY VALVES (NOT SUPPLIED) ARE REQUIRED FOR 36XXFR INSTALLATION. REFER TO BURY VALVE OPERATION AND MAINTENANCE MANUAL FOR ADDITIONAL INFORMATION.

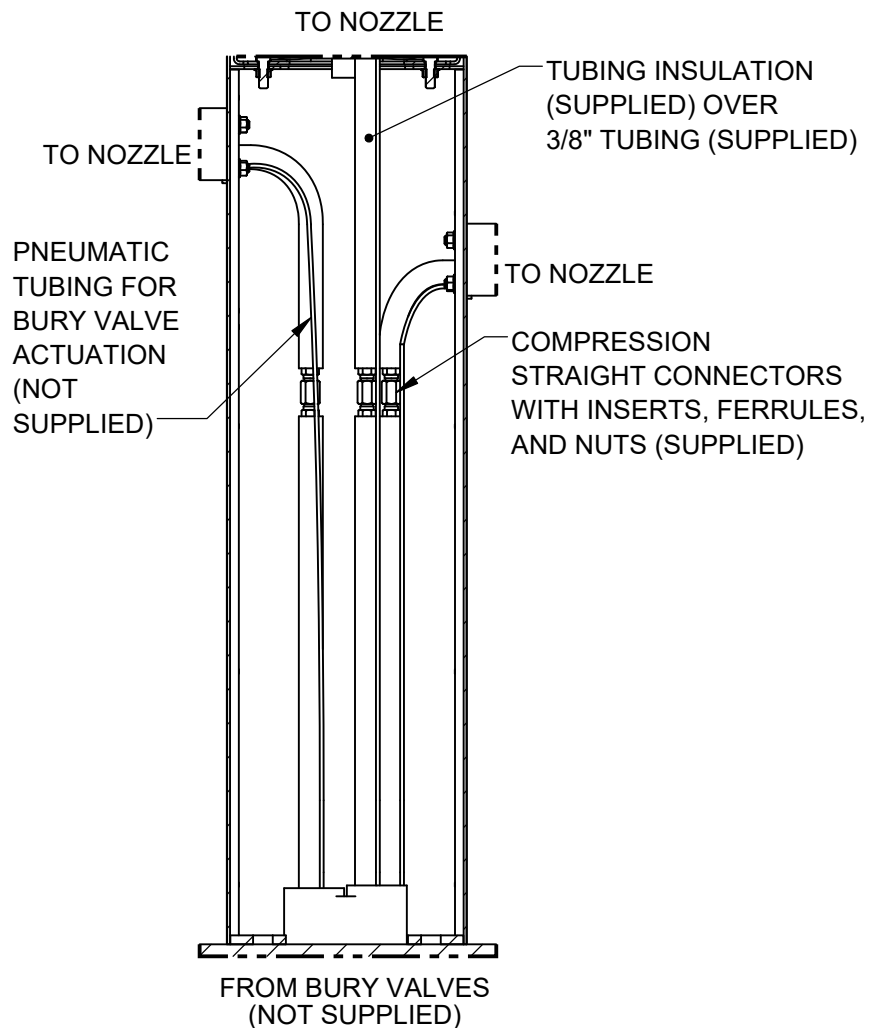

**36XXFR TYPICAL SUPPLY PLUMBING*
FREEZE RESISTANT**

* SEE NEXT SHEET OF THIS DRAWING FOR MORE INFORMATION ON INSTALLING BURY VALVES WITH THESE MODELS.

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSO.COM WEBSITE: WWW.HAWSO.COM	
		PART NUMBER 0580001176	
ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S) 3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR
DRAWN: DHP	DATE: 6/11/20	CHKD: FV	REVISION 1
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION
SIZE: A			SHEET 5 OF 7

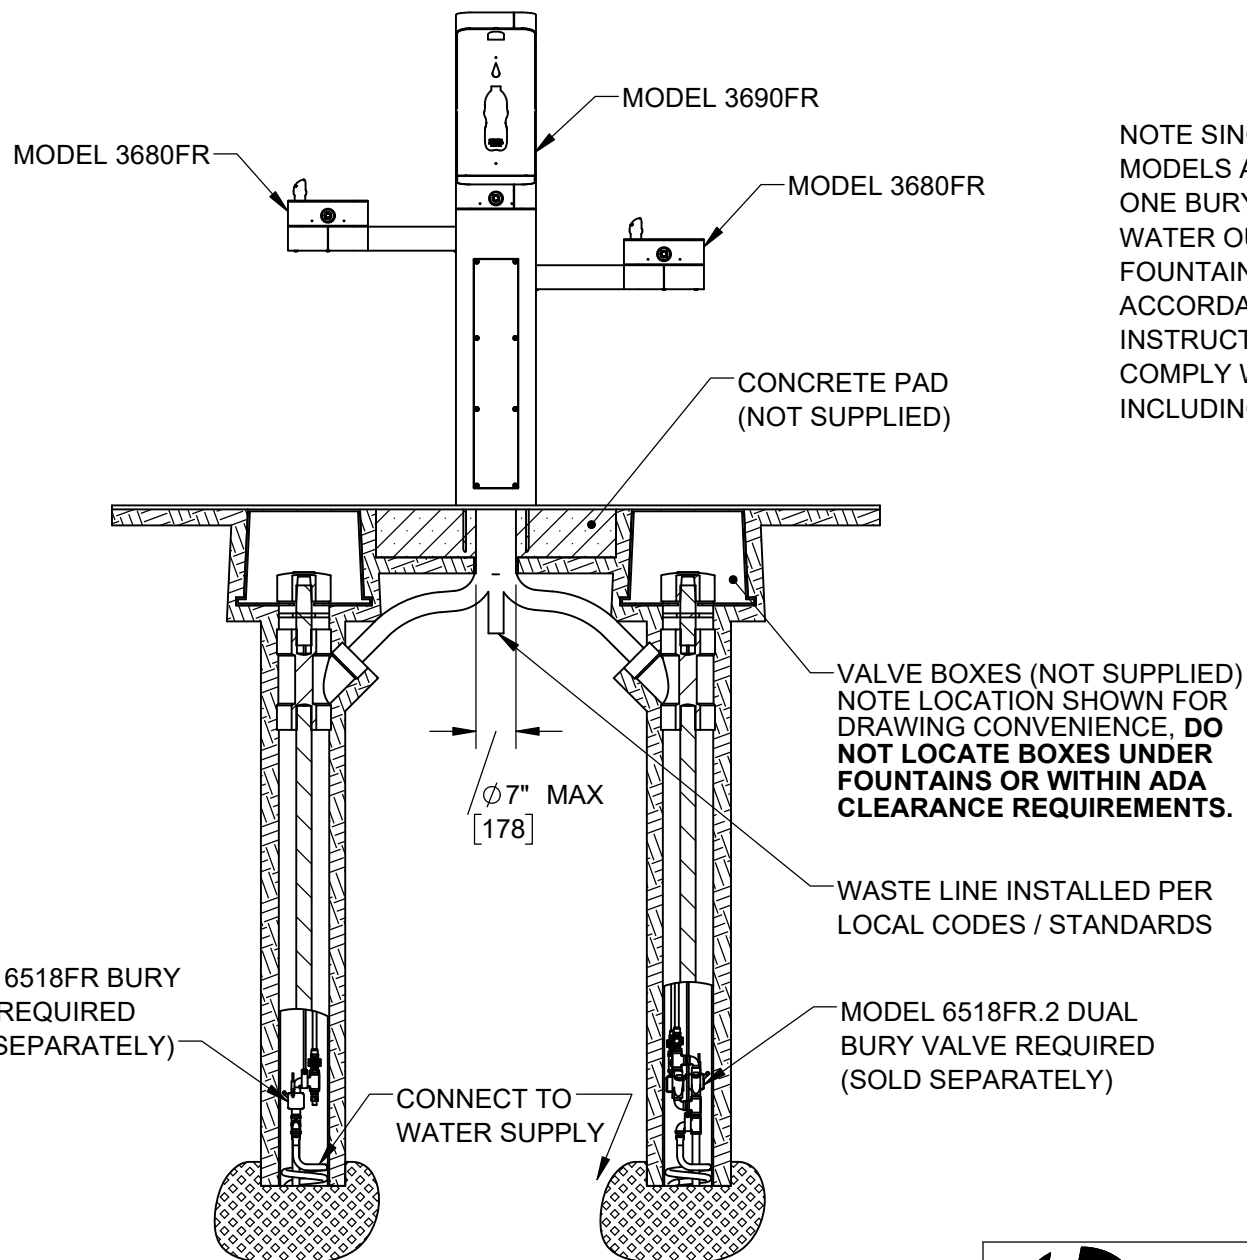

NOTE SINGLE OR DUAL BURY VALVE MODELS AVAILABLE (SOLD SEPARATELY). ONE BURY VALVE IS REQUIRED PER WATER OUTLET NOZZLE ON THE FOUNTAIN. INSTALL BURY VALVES IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. INSTALLATION MUST COMPLY WITH LOCAL CODES /STANDARDS, INCLUDING ADA CODES IF APPLICABLE.

VALVE BOXES (NOT SUPPLIED)
NOTE LOCATION SHOWN FOR
DRAWING CONVENIENCE, **DO
NOT LOCATE BOXES UNDER
FOUNTAINS OR WITHIN ADA
CLEARANCE REQUIREMENTS.**

WASTE LINE INSTALLED PER
LOCAL CODES / STANDARDS

MODEL 6518FR.2 DUAL
BURY VALVE REQUIRED
(SOLD SEPARATELY)

MODEL 6518FR BURY
VALVE REQUIRED
(SOLD SEPARATELY)

CONNECT TO
WATER SUPPLY

**36XXFR GENERAL BURY
VALVE LAYOUT
(FOR REFERENCE ONLY)**




1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S) 3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	PART NUMBER 0580001176
DRAWN: DHP	DATE: 8/11/20	CHKD: FV		REVISION 1
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	SIZE: A
				SHEET 6 OF 7

NOTES ON OPTIONAL CONFIGURATIONS


HAWS 3600 SERIES OUTDOOR FOUNTAINS ARE MODULAR AND CAN BE ASSEMBLED AND CONFIGURED MANY DIFFERENT WAYS. DISPLAYED HERE ARE A FEW EXAMPLES. IT IS POSSIBLE TO CONFIGURE COMPONENTS SUCH THAT THE RESULTING FOUNTAIN/BOTTLE FILLER DOES NOT COMPLY WITH ADA REGULATIONS. IT IS THE RESPONSIBILITY OF THE INSTALLER TO UNDERSTAND LOCAL, STATE, AND FEDERAL REGULATIONS AS APPLICABLE IF INSTALLING THIS FOUNTAIN IN CONFIGURATIONS OTHER THAN THAT INDICATED ON PAGE 1.

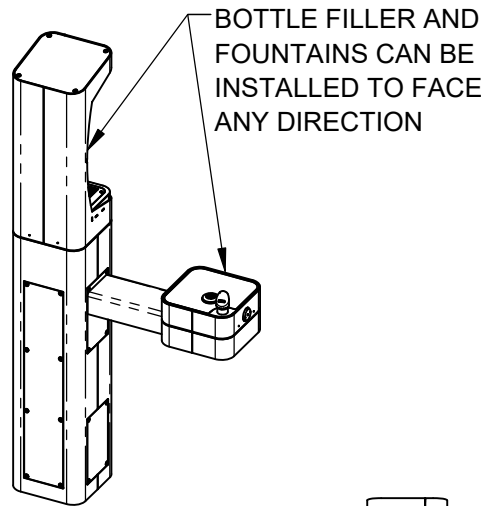

ADA ARM HEIGHT POSITION OPTIONS				
	LEFT SIDE*	RIGHT SIDE*	ARM HEIGHT (LOWER EDGE)	BUBBLER NOZZLE HEIGHT
STANDING ADA	YES (STD)	NO	31-7/8 [809 mm]	39-3/8 [999 mm]**
WHEELCHAIR ADA	YES	YES (STD)	27 [687 mm]	34-5/8 [878 mm]
CHILD ADA	YES	YES	22-1/4 [566 mm]	29-7/8 [757 mm]

* RIGHT AND LEFT CAN BE REVERSED IF PEDESTAL IS ROTATED 180°.


**NOZZLE HEIGHT IS 41-1/2" WHEN FOUNTAIN IS INSTALLED ON TOP OF PEDESTAL.

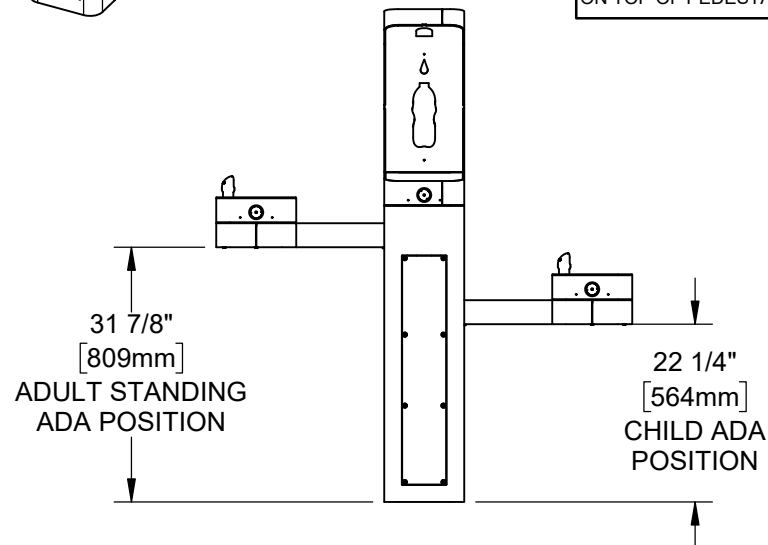

MODEL 3690/3690FR CAN BE INSTALLED ON MODEL 3671 ARMS

ADA STANDING HEIGHT MODEL 3680/3680FR FOUNTAIN INSTALLED ON MODEL 3674 PEDESTAL

27" [687mm] WHEELCHAIR ADA POSITION

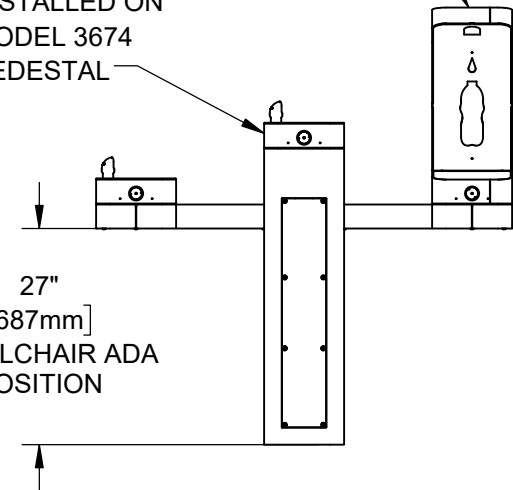

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5652	REV. ECN: 5652	BY: DP	MODEL(S) 3671 / 3674 / 3680 / 3680FR / 3690 / 3690FR	PART NUMBER 0580001176
DRAWN: DHP	DATE: 8/11/20	CHKD: FV		REVISION 1
APPROVED: FV	DATE: 03/18/21	SCALE: 1:24	DRAWING TYPE: INSTALLATION	SIZE: A SHEET 7 OF 7