





HM Register


- Extruded aluminum construction
- Single row of individually adjustable horizontal face bars
- Pivoted bars for easy positive setting
- Lever-operated, multi-shutter valve
- Bright White or Satin Anodized finish

Note: Screw hole location details on page 120



HM Available Sizes (in.)	
HT	WIDTH
4	6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36
5	X X X X X X X X X X X X X X X X
6	X X X X X X X X X X X X X X X X
8	X X X X X X X X X X X X X X X X
10	X X X X X X X X X X X X X X X X
12	X X X X X X X X X X X X X X X X
14	X X X X X X X X X X X X X X X X
16	X X X X X X X X X X X X X X X X
18	X X X X X X X X X X X X X X X X
20	X X X X X X X X X X X X X X X X
22	X X X X X X X X X X X X X X X X
24	X X X X X X X X X X X X X X X X
26	X X X X X X X X X X X X X X X X
28	X X X X X X X X X X X X X X X X
30	X X X X X X X X X X X X X X X X
32	X X X X X X X X X X X X X X X X
34	X X X X X X X X X X X X X X X X
36	X X X X X X X X X X X X X X X X


Other sizes available upon request

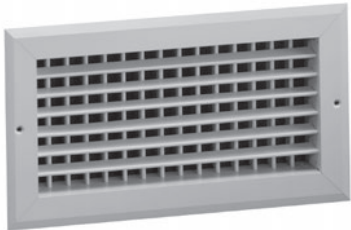

HV Register

- Extruded aluminum construction
- Horizontal front bars
- Vertical second bars
- Two rows of individually adjustable face bars for horizontal and vertical deflection
- Pivoted bars for easy positive setting
- Bright White or Satin Anodized finish

Note: Screw hole location details on page 120



HV Available Sizes (in.)	
HT	WIDTH
4	6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48
5	X X
6	X X
8	X X
10	X X
12	X X
14	X X
16	X X
18	X X
20	X X
22	X X
24	X X
26	X X
28	X X
30	X X
32	X X
34	X X
36	X X
38	X X
40	X X
42	X X
44	X X
46	X X
48	X X

Other sizes available upon request

Using the Engineering Data

For most of the models & sizes we've done the calculations for you.

CFM = volume of air flow in cubic feet per minute

421

Face Velocity		300	400	500	600	700	800
Pressure Loss		.006	.010	.016	.022	.031	.040
4x10	CFM	50	70	85	100	120	135
Ak	Spread	4.5	5.0	6.5	7.5	9.0	10.0
.170	Throw	4.0	6.0	8.0	10.0	11.0	12.5

Terminal velocity of 50 fpm

821-defl A

Face Velocity		400	500	600	700	800
Pressure Loss		.010	.016	.022	.031	.040
24 x 8	CFM	420	525	625	730	835
Ak	Throw	17.0	21.0	25.0	29.0	33.0
1.045						

Terminal velocity is 75 fpm

Face Velocity = speed of air at the face of diffuser in feet per minute (FPM)

Ak = net area in square feet. This is the lab measured area across the face when air is mechanically forced through the opening.

Free Area (if given) = daylight area (in²) of blade openings. Free area is typically only required on natural / gravity movement of air, non-mechanically forced, as in free area needed for combustion air requirements on heating equipment. Use the Ak value (*144 to get to in²) if the free area has not been calculated, but is needed for a given size/model grille requiring free area for combustion.

Equation of Airflow: CFM = Ak (ft²) x Face Velocity (fpm)

Example from 421 table above: 100 = .17 x 600 _ numbers are often rounded

Sizing a Supply

Determine the amount of CFM (air volume) needed for each supply outlet. This should be done by room heating and cooling load requirements from various design manuals (ACCA Man J, ASHRAE Fundamentals Hndbk) and then followed by the duct design and layout.

Face Velocity - H&C recommends sizing a supply outlet in the range of 500 to 800 fpm face velocity (700 being a common target). The upper end of this range will create better mixing of room air and longer throws, which is what the typical forced air system is intended to do. However, the Pressure resistance and Noise must be taken into consideration depending upon the application. In some instances, greater face velocity is allowed because the pressure and noise can be accommodated.

consider the associated pressure loss that deals with each relative model. An increase in face velocity creates more pressure resistance against the blower's delivery of air volume. The velocity ranges given previously will, in most cases, have minor effect on the blower's overall performance given the entire duct system losses that it will encounter.

Noise – an increase in face velocity will create more noise. The tables below show NC design guidelines and also face velocity ranges if NC values have not been tabulated.

Application	Recommended Face Velocities
Broadcasting Studios	<500 FPM
Residences	500 to 750 FPM
Apartments	500 to 750 FPM
Churches	500 to 750 FPM
Hotel Guestrooms	500 to 750 FPM
Legitimate Theaters	500 to 1000 FPM
Private Offices, acoustically treated	500 to 1000 FPM
Private Offices, not treated	1000 to 1250 FPM
Motion Picture Theaters	1000 to 1250 FPM
General Offices	1250 to 1500 FPM
Stores, upper floors	1500 FPM
Stores, main floors	1500 FPM
Industrial Buildings	1500 to 2000 FPM

	Communication Environment	Typical Occupancy
< NC 25	Extremely quiet environment; suppressed speech is quite audible; suitable for acute pickup of all sounds.	Broadcasting studios, concert halls, music rooms.
NC 30	Very quiet office; suitable for large conferences; telephone use satisfactory.	Residences, theaters, libraries, executive offices, directors rooms.
NC 35	Quiet office; satisfactory for conference at a 15-foot table; normal voice 10 to 30 feet; telephone use satisfactory.	Private offices, schools, hotel guestrooms, courtrooms, churches, hospital rooms.
NC 40	Satisfactory for conferences at a 6-to 8-foot table; normal voice 6 to 12 feet; telephone use satisfactory.	General office, labs, dining rooms.
NC 45	Satisfactory for conferences at a 4- to 5-foot table; normal voice 3 to 6 feet; raised voice 6 to 12 feet; telephone use occasionally difficult.	Retail stores, cafeterias, lobby areas, large drafting and engineering offices, reception areas.
> NC 50	Unsatisfactory for conference of more than two or three persons; normal voice 1 to 2 feet; raised voice 3 to 6 feet; telephone use slightly difficult.	Computer rooms, stenographic pools, print machine rooms, process areas.

Sizing a Return

Air volume going back to the air handler (fan) must equal what is supplied from the air handler. Therefore the total CFM capacity of the return grilles must equal or exceed the total CFM capacity of all the supply diffusers.

Pressure Loss (inches of w.c.) – the selection of the face velocity must

Recommended Noise Criteria and Face Velocity Ranges are on page 77

Keeping face velocity low

- Returns should be at 400-600 fpm maximum
- Filter Returns should be at 450 fpm maximum
- *ACCA recommends 300 max for filter grilles and 500 max for non-filter grilles.
- The rule of thumb is 2 cfm per square inch of filter size. See table below.
- Low velocity reduces noise, especially on stamped face grilles (672/673); fixed-bar grilles can handle more velocity without noise (94A/96AFB/RH45/RHF45/RCB).
- A single point return cannot be oversized like a supply. The system will not be affected adversely, only improved. *This does not apply to multiple return locations where balancing is more critical to pull in relevant amounts from each room.
- Static pressure is also reduced. Pressure works against & reduces blower delivery volume (cfm)
- Noise is not expected from a return.

Location

Filter Size	Area (in ²)	Ton (cfm)	Filter Size	Area (in ²)	Ton (cfm)
12 12	144	n/a	20 20	400	2 (800)
12 20	240	1 (400)	20 25	500	2.5 (1000)
12 24	288	1.5 (600)	20 30	600	3 (1200)
12 30	360	1.5 (600)	20 36	720	3 (1200)
14 14	196	1 (400)	24 24	576	3 (1200)
14 20	280	1.5 (600)	24 30	720	3 (1200)
14 24	336	1.5 (600)	24 36	864	4 (1600)
14 30	420	2 (800)	25 25	625	3 (1200)
16 20	320	1.5 (600)	30 30	900	4 (1600)
16 24	384	2 (800)	30 36	1080	5 (2000)

- Returns should be put in stagnant air locations that need to be reconditioned.
 - High for cooling mode (hot air rises)
 - Low for heating mode (cold air falls)
 - Both modes, choose a primary season
- Returns should not be near a supply register's throw range. If at all possible place the return at an opposite corner of the room.

Room Air Movement

- Returns do NOT have much effect on a room's air movement, regardless of face velocity. They only grab air about a duct diameter away from the face. Most of the room air movement is done by the supplies.

Unlisted Sizes—Engineering Data

When a size is not listed there are a couple ways to do an engineered estimate. Airflow principles permit you to utilize existing sizes to determine sizes not shown.

Method 1: Use nearest nominal size table entry. If a 14x14 is not given, but a 20x10 is, since these two sizes have an approximate equal core area (196 and 200) the table entry for a 20x10 can be used to approximate what the 14x14 grille would perform to.

Method 2: A more exact method would be to do interpolation process between two listed sizes. If 14x14 is not given, but 18x10 and 20x10 are, then this equation will get more exact 14x14 data. $Y = Y1$

+ $\{[(X - X1) * (Y2 - Y1)] / (X2 - X1)\}$ where:

Y = unknown CFM or throw that is being computed for 14x14

$Y1$ = CFM or throw of listed 18x10 (for ex 600 cfm)

$Y2$ = CFM or throw of listed 20x10 (for ex 640 cfm)

X = 196 in² (nominal area of 14x14)

$X1$ = 180 in² (nominal area of 18x10)

$X2$ = 200 in² (nominal area of 20x10)

Using equation above computes $Y = 600 + \{[(196 - 180) * (640 - 600)] / (200 - 180)\} =$

$600 + \{[16 * 40] / 20\} = 600 + 32 = 632$ cfm for Y

Method 3: Sizes beyond the table (smaller or larger) can have their CFM or Throw determined by using listed sizes by the following:

CFM for larger sizes:

If **24**

12 x 6	12 x 6
12 x 6	12 x 6

12

looking for 24x6 or 24x12 cfm that is not listed, using the listed 12x6 cfm and doubling it or quadrupling it will give the answer for the 24x6 and 24x12, respectively.

CFM for smaller sizes:

If looking for a 6x6 cfm that is not listed, using the listed 12x6 cfm and halving it will give the answer for a 6x6.

Throw:

Double the size and CFM, multiply the throw by 1.5

Quadruple the size and CFM, multiply the throw by 2

Half the size and CFM, multiply the throw by .67

One quarter the size and CFM, multiply the throw by .5

*Pressure loss, face velocity and noise criteria will all remain the same relative to the listed size used to determine the larger or smaller sizes not shown.

Engineering Data


H and V Series (Page 12-16)

Deflection A

Face Velocity	400	500	600	700	800	900	1000	1100	1200	1300	1400	1600	1800	2000
Pressure Loss	.010	.016	.022	.031	.040	.050	.062	.075	.090	.105	.122	.160	.202	.249
8 x 4	CFM	60	80	95	110	125	140	155	170	185	205	220	250	280
Ak 156	Throw	6.5	8.0	10.0	12.0	13.0	15.0	16.0	18.0	19.0	22.0	23.0	29.0	33.0
10 x 4	CFM	80	100	120	140	160	180	200	220	240	260	275	315	355
Ak 198	Throw	7.5	9.5	12.0	13.0	15.0	17.0	19.0	20.0	22.0	24.0	26.0	29.0	33.0
12 x 4	CFM	95	120	145	170	190	215	240	265	290	310	335	385	430
Ak 240	Throw	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0	26.0	28.0	33.0	36.0
14 x 4	CFM	115	140	170	195	225	255	280	310	340	365	395	450	510
Ak 282	Throw	9.0	11.0	13.0	15.0	18.0	20.0	22.0	24.0	27.0	29.0	31.0	35.0	40.0
12 x 5	CFM	125	155	185	215	250	280	310	340	370	405	435	495	560
Ak 310	Throw	9.0	12.0	14.0	16.0	19.0	21.0	23.0	25.0	28.0	30.0	32.0	37.0	42.0
10 x 6	CFM	125	155	190	220	250	280	315	345	375	405	440	500	565
Ak 313	Throw	9.0	12.0	14.0	16.0	19.0	21.0	23.0	26.0	28.0	30.0	33.0	37.0	42.0
14 x 5	CFM	145	180	220	255	290	330	365	400	435	475	510	580	655
Ak 364	Throw	10.0	12.0	15.0	18.0	20.0	23.0	25.0	28.0	30.0	33.0	35.0	40.0	45.0
12 x 6	CFM	150	190	225	265	305	340	380	415	455	495	530	605	680
Ak 379	Throw	10.0	13.0	15.0	18.0	21.0	23.0	26.0	28.0	31.0	33.0	36.0	41.0	46.0
16 x 5	CFM	165	210	250	295	335	375	420	460	500	545	585	670	750
Ak 418	Throw	11.0	13.0	16.0	19.0	22.0	24.0	27.0	30.0	32.0	35.0	38.0	43.0	48.0
14 x 6	CFM	180	225	270	310	355	400	445	490	535	580	625	715	805
Ak 446	Throw	11.0	14.0	17.0	19.0	22.0	25.0	28.0	30.0	33.0	36.0	39.0	44.0	50.0
16 x 6	CFM	205	255	305	360	410	460	510	565	615	665	715	820	920
Ak 512	Throw	11.0	14.0	17.0	20.0	22.0	25.0	28.0	31.0	34.0	36.0	39.0	45.0	50.0
20 x 5	CFM	210	265	315	370	420	475	525	580	630	685	735	840	945
Ak 526	Throw	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	48.0	54.0
24 x 5	CFM	255	315	380	445	505	570	635	695	760	825	890	1015	1140
Ak 634	Throw	13.0	16.0	20.0	23.0	26.0	30.0	33.0	36.0	40.0	43.0	46.0	53.0	59.0
20 x 6	CFM	260	325	385	450	515	580	645	710	775	840	905	1030	1160
Ak 645	Throw	13.0	17.0	20.0	23.0	27.0	30.0	33.0	37.0	40.0	43.0	47.0	53.0	60.0
24 x 6	CFM	310	390	465	545	620	700	775	855	930	1010	1090	1245	1400
Ak 777	Throw	15.0	18.0	22.0	26.0	29.0	33.0	37.0	40.0	44.0	48.0	51.0	59.0	66.0
20 x 8	CFM	355	440	530	615	705	795	880	970	1060	1145	1235	1410	1590
Ak 882	Throw	16.0	19.0	23.0	27.0	31.0	35.0	39.0	43.0	47.0	51.0	55.0	62.0	70.0
30 x 6	CFM	390	490	585	685	780	880	975	1075	1170	1270	1365	1560	1755
Ak 976	Throw	16.0	21.0	25.0	29.0	33.0	37.0	41.0	45.0	49.0	53.0	57.0	66.0	74.0
24 x 8	CFM	425	530	635	740	850	955	1060	1165	1270	1380	1485	1695	1910
Ak 1060	Throw	17.0	21.0	23.0	30.0	34.0	38.0	43.0	47.0	51.0	56.0	60.0	68.0	77.0
30 x 8	CFM	535	670	805	940	1070	1205	1340	1475	1610	1740	1875	2145	2410
Ak 1340	Throw	19.0	24.0	29.0	34.0	38.0	43.0	48.0	53.0	58.0	62.0	67.0	77.0	87.0
24 x 10	CFM	540	675	810	945	1080	1215	1350	1485	1620	1755	1890	2160	2430
Ak 1350	Throw	19.0	24.0	29.0	34.0	39.0	43.0	48.0	53.0	58.0	63.0	68.0	77.0	87.0
36 x 8	CFM	645	805	965	1125	1290	1450	1610	1770	1930	2095	2255	2575	2900
Ak 1610	Throw	21.0	26.0	32.0	37.0	42.0	47.0	52.0	58.0	63.0	68.0	73.0	84.0	94.0
24 x 12	CFM	655	820	985	1150	1310	1475	1640	1805	1970	2130	2295	2625	2950
Ak 1640	Throw	21.0	27.0	32.0	37.0	43.0	48.0	53.0	59.0	64.0	69.0	75.0	85.0	97.0
30 x 10	CFM	675	845	1015	1185	1350	1520	1690	1860	2030	2195	2365	2705	3040
Ak 1690	Throw	21.0	27.0	32.0	38.0	43.0	48.0	54.0	59.0	65.0	70.0	75.0	86.0	97.0
36 x 10	CFM	815	1020	1225	1430	1630	1835	2040	2245	2450	2655	2855	3265	3670
Ak 2040	Throw	24.0	30.0	36.0	42.0	47.0	53.0	59.0	65.0	71.0	77.0	83.0	95.0	107.0
30 x 12	CFM	820	1025	1230	1435	1640	1845	2050	2255	2460	2665	2870	3280	3690
Ak 2050	Throw	24.0	30.0	36.0	42.0	48.0	54.0	59.0	65.0	71.0	77.0	83.0	95.0	107.0
36 x 12	CFM	990	1235	1480	1730	1975	2225	2470	2715	2965	3210	3460	3950	4450
Ak 2470	Throw	26.0	33.0	39.0	46.0	52.0	59.0	65.0	72.0	78.0	85.0	91.0	104.0	119.0

For sizes not listed and sizing tips see page 78

Terminal Velocity of 75 FPM

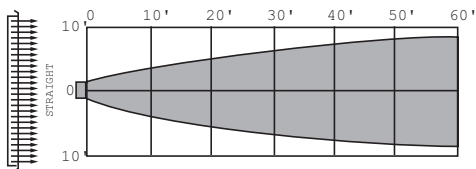

*NC 30	NC 35	NC 40	**NC 45

* less than or equal to

** greater than or equal to

Deflection C

Face Velocity	400	500	600	700	800	900	1000	1100	1200	1300	1400	1600	1800	2000
Pressure Loss	.010	.016	.022	.031	.040	.050	.062	.075	.090	.105	.122	.160	.202	.249
8 x 4	CFM	55	70	85	100	115	125	140	155	170	185	195	225	255
Ak 141	Throw	5.0	6.5	7.5	9.0	10.0	11.0	13.0	14.0	15.0	17.0	18.0	20.0	23.0
10 x 4	CFM	70	90	105	125	140	160	180	195	215	230	250	285	320
Ak 178	Throw	5.5	7.0	8.5	10.0	11.0	13.0	14.0	16.0	17.0	18.0	20.0	23.0	26.0
12 x 4	CFM	85	110	130	150	175	195	215	240	260	280	300	345	390
Ak 216	Throw	6.0	8.0	9.5	11.0	13.0	14.0	16.0	18.0	19.0	20.0	22.0	25.0	28.0
14 x 4	CFM	100	125	150	180	205	230	255	280	305	330	355	405	455
Ak 254	Throw	7.0	8.5	10.0	12.0	14.0	16.0	17.0	19.0	21.0	22.0	24.0	27.0	31.0
12 x 5	CFM	110	140	165	195	225	250	280	305	335	365	390	445	500
Ak 279	Throw	7.0	9.0	11.0	13.0	14.0	16.0	18.0	20.0	22.0	23.0	25.0	29.0	32.0
10 x 6	CFM	115	140	170	195	225	255	280	310	340	365	395	450	510
Ak 282	Throw	7.5	9.0	11.0	12.0	14.0	16.0	18.0	20.0	22.0	23.0	25.0	29.0	33.0
14 x 5	CFM	130	165	195	230	260	295	330	360	395	425	460	525	590
Ak 328	Throw	7.5	10.0	12.0	14.0	15.0	17.0	20.0	21.0	23.0	25.0	27.0	31.0	35.0
12 x 6	CFM	135	170	205	240	275	310	340	375	410	445	480	545	615
Ak 342	Throw	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	32.0	36.0
16 x 5	CFM	150	190	225	265	300	340	375	415	450	490	525	605	680
Ak 377	Throw	8.5	11.0	12.0	15.0	17.0	19.0	21.0	23.0	25.0	27.0	29.0	34.0	38.0
14 x 6	CFM	165	205	245	290	330	370	410	455	495	535	575	660	740
Ak 412	Throw	9.0	11.0	13.0	16.0	18.0	20.0	22.0	24.0	27.0	28.0	31.0	35.0	40.0
16 x 6	CFM	185	230	275	325	370	415	460	510	555	600	645	740	830
Ak 462	Throw	9.0	11.0	13.0	15.0	18.0	20.0	22.0	24.0	26.0	28.0	31.0	35.0	40.0
20 x 5	CFM	190	235	285	330	380	425	475	520	570	615	665	760	855
Ak 474	Throw	9.5	12.0	14.0	16.0	19.0	21.0	23.0	26.0	28.0	30.0	33.0	38.0	42.0
24 x 5	CFM	230	285	345	400	460	515	570	630	685	745	800	915	1030
Ak 572	Throw	10.0	13.0	15.0	18.0	21.0	23.0	26.0	28.0	33.0	33.0	36.0	41.0	46.0
20 x 6	CFM	230	290	350	405	465	525	580	640	695	755	815	930	1045
Ak 581	Throw	10.0	13.0	16.0	18.0	21.0	23.0	26.0	29.0	31.0	34.0	36.0	41.0	47.0
24 x 6	CFM	280	350	420	490	560	630	700	770	840	910	980	1120	1260
Ak 701	Throw	11.0	14.0	17.0	20.0	23.0	26.0	28.0	31.0	34.0	37.0	40.0	45.0	51.0
20 x 8	CFM	320	400	475	555	635	715	795	875	955	1035	1115	1270	1430
Ak 795	Throw	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	48.0	54.0</


H and V Series (Page 12-16)

Deflection E

Face Velocity	400	500	600	700	800	900	1000	1100	1200	1300	1400	1600	1800	2000
Pressure Loss	.010	.016	.022	.031	.040	.050	.062	.075	.090	.105	.122	.160	.202	.249
8 x 4 CFM	45	60	70	85	95	105	120	130	140	155	165	190	210	235
Ak .127 Throw	2.5	3.5	4.0	5.0	5.5	6.0	6.5	7.5	8.0	8.5	9.5	11.0	12.0	13.0
10 x 4 CFM	60	75	90	105	120	135	150	165	180	195	210	240	270	300
Ak .162 Throw	3.0	3.5	4.5	5.0	6.0	6.5	7.5	8.0	9.0	9.5	10.0	12.0	13.0	15.0
12 x 4 CFM	80	100	120	140	160	175	195	215	235	255	275	315	355	395
Ak .197 Throw	4.5	6.0	7.5	8.5	10.0	11.0	12.0	13.0	14.0	16.0	17.0	19.0	22.0	24.0
14 x 4 CFM	90	115	140	160	185	210	230	255	275	300	325	370	415	460
Ak .231 Throw	5.0	6.5	8.0	9.0	11.0	12.0	13.0	14.0	16.0	17.0	18.0	21.0	23.0	26.0
12 x 5 CFM	100	125	150	180	205	230	255	280	305	330	355	405	455	510
Ak .254 Throw	5.5	6.5	8.0	9.5	12.0	12.0	14.0	15.0	16.0	18.0	19.0	22.0	25.0	27.0
10 x 6 CFM	105	130	155	180	205	230	255	285	310	335	360	410	465	515
Ak .257 Throw	5.5	7.5	8.5	9.5	11.0	12.0	14.0	15.0	17.0	18.0	19.0	22.0	25.0	28.0
14 x 5 CFM	120	150	180	210	240	270	300	330	360	385	415	475	535	595
Ak .291 Throw	6.0	7.5	9.0	10.0	12.0	13.0	15.0	16.0	18.0	19.0	21.0	24.0	27.0	30.0
12 x 6 CFM	125	155	185	220	250	280	310	340	375	405	435	500	560	620
Ak .311 Throw	6.0	7.5	9.0	11.0	12.0	14.0	15.0	17.0	18.0	20.0	21.0	24.0	28.0	30.0
16 x 5 CFM	135	170	205	240	275	310	345	375	410	445	480	550	615	685
Ak .343 Throw	6.5	8.0	9.5	11.0	13.0	14.0	16.0	17.0	19.0	21.0	22.0	26.0	29.0	32.0
14 x 6 CFM	145	185	220	255	290	330	365	400	440	475	510	585	655	730
Ak .365 Throw	6.5	8.5	10.0	11.0	13.0	15.0	16.0	18.0	20.0	21.0	23.0	26.0	29.0	33.0
16 x 6 CFM	170	215	240	300	345	390	430	475	545	560	605	690	775	860
Ak .431 Throw	7.0	9.0	11.0	12.0	14.0	16.0	18.0	20.0	21.0	23.0	25.0	28.0	32.0	36.0
20 x 5 CFM	190	235	280	330	375	425	470	515	565	610	660	750	845	940
Ak .470 Throw	7.5	9.5	11.0	13.0	15.0	17.0	19.0	20.0	22.0	24.0	26.0	30.0	33.0	37.0
24 x 5 CFM	210	265	310	365	415	470	520	570	625	675	730	830	935	1040
Ak .520 Throw	8.0	10.0	12.0	14.0	16.0	18.0	20.0	21.0	24.0	25.0	27.0	31.0	35.0	39.0
20 x 6 CFM	210	265	315	370	420	475	530	580	635	685	740	845	950	1055
Ak .528 Throw	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	32.0	35.0	39.0
24 x 6 CFM	255	320	380	445	510	575	635	700	765	830	890	1020	1145	1275
Ak .637 Throw	8.5	11.0	13.0	15.0	17.0	20.0	22.0	24.0	26.0	28.0	30.0	35.0	39.0	43.0
20 x 8 CFM	290	360	435	505	580	650	725	795	870	940	1010	1155	1300	1445
Ak .723 Throw	9.0	12.0	14.0	16.0	19.0	21.0	23.0	25.0	28.0	30.0	32.0	37.0	42.0	46.0
30 x 6 CFM	320	400	480	560	640	720	800	880	960	1040	1120	1280	1440	1600
Ak .800 Throw	10.0	12.0	15.0	17.0	19.0	22.0	24.0	27.0	29.0	32.0	34.0	39.0	44.0	49.0
24 x 8 CFM	350	435	525	610	700	785	870	960	1045	1135	1220	1400	1570	1745
Ak .872 Throw	10.0	13.0	15.0	18.0	20.0	23.0	25.0	28.0	30.0	33.0	36.0	41.0	46.0	51.0
30 x 8 CFM	435	545	655	765	870	980	1090	1200	1310	1415	1525	1745	1960	2180
Ak .1090 Throw	11.0	14.0	17.0	20.0	23.0	25.0	28.0	31.0	34.0	37.0	40.0	45.0	51.0	57.0
24 x 10 CFM	445	555	665	775	890	1000	1110	1220	1330	1445	1555	1775	2000	2220
Ak .1110 Throw	11.0	14.0	17.0	20.0	23.0	26.0	29.0	31.0	34.0	37.0	40.0	46.0	52.0	57.0
36 x 8 CFM	530	660	790	925	1055	1190	1320	1450	1585	1715	1850	2110	2375	2640
Ak .1320 Throw	14.0	17.0	21.0	24.0	27.0	31.0	34.0	38.0	41.0	45.0	48.0	55.0	62.0	69.0
24 x 12 CFM	535	670	805	940	1070	1205	1340	1475	1610	1740	1875	2145	2410	2680
Ak .1340 Throw	13.0	16.0	19.0	22.0	25.0	28.0	31.0	35.0	38.0	41.0	44.0	50.0	57.0	63.0
30 x 10 CFM	555	695	835	975	1110	1250	1390	1530	1670	1805	1945	2225	2500	2780
Ak .1390 Throw	13.0	16.0	19.0	22.0	26.0	29.0	32.0	38.0	38.0	42.0	45.0	51.0	58.0	64.0
36 x 10 CFM	670	835	1000	1170	1335	1505	1670	1835	2005	2170	2340	2670	3005	3340
Ak .1670 Throw	14.0	18.0	21.0	25.0	28.0	32.0	35.0	39.0	42.0	46.0	49.0	56.0	63.0	70.0
30 x 12 CFM	670	840	1010	1175	1345	1510	1680	1850	2015	2185	2350	2690	3025	3360
Ak .1680 Throw	14.0	16.0	21.0	25.0	28.0	32.0	35.0	39.0	42.0	46.0	49.0	56.0	63.0	70.0
36 x 12 CFM	810	1015	1220	1420	1625	1825	2030	2235	2435	2640	2840	3250	3655	4060
Ak .2030 Throw	15.0	19.0	23.0	27.0	31.0	35.0	39.0	43.0	46.0	50.0	54.0	62.0	70.0	78.0

For sizes not listed and sizing tips see page 78

Terminal Velocity of 75 FPM



Deflection G

Face Velocity	400	500	600	700	800	900	1000	1100	1200	1300	1400	1600	1800	2000
Pressure Loss	.010	.016	.022	.031	.040	.050	.062	.075	.090	.105	.122	.160	.202	.249
8 x 4 CFM	45	670	70	85	95	105	120	130	140	155	165	190	210	235
Ak .118 Throw	2.5	3.5	4.0	5.0	5.5	6.0	6.5	7.5	8.0	8.5	9.5	11.0	12.0	13.0
10 x 4 CFM	60	75	90	105	120	135	150	165	180	195	210	240	270	300
Ak .149 Throw	3.0	3.5	4.5	5.0	6.0	6.5	7.5	8.0	9.0	9.5	10.0	12.0	13.0	15.0
12 x 4 CFM	70	90	110	125	145	165	180	200	215	235	255	290	325	360
Ak .181 Throw	3.0	4.0	5.0	5.5	6.5	7.5	8.0	9.0	10.0	11.0	12.0	13.0	15.0	16.0
14 x 4 CFM	85	105	125	150	170	190	210	235	255	275	300	340	380	425
Ak .212 Throw	3.5	4.5	5.0	6.0	6.5	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	16.0
12 x 5 CFM	95	115	140	165	185	210	235	255	280	305	325	375	420	465
Ak .233 Throw	4.0	4.5	5.5	6.5	7.5	8.5	9.5	10.0	11.0	12.0	13.0	15.0	17.0	19.0
10 x 6 CFM	95	120	140	165	190	210	235	260	285	305	330	380	425	470
Ak .236 Throw	4.0	5.0	5.5	6.5	7.5	8.5	9.5	10.0	11.0	12.0	13.0	15.0	17.0	19.0
14 x 5 CFM	110	135	165	190	220	245	275	300	330	355	385	440	495	550
Ak .274 Throw	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	16.0	18.0	20.0
12 x 6 CFM	115	145	170	200	230	255	285	315	345	370	400	460	515	570
Ak .286 Throw	4.0	5.0	6.0	7.0	8.5	9.0	10.0	11.0	12.0	13.0	14.0	17.0	19.0	21.0
16 x 5 CFM	125	160	190	220	250	285	315	345	380	410	440	505	565	630
Ak .315 Throw	4.5	5.5	6.5	7.5	8.5	10.0	11.0	12.0	13.0	14.0	15.0	17.0	19.0	22.0
14 x 6 CFM	135	170	200	235	270	300	335	370	405	435	470	540	605	670
Ak .336 Throw	4.5	5.5	6.5	8.0	9.0	10.0	11.0	12.0	13.0	13.0	16.0	18.0	20.0	22.0
16 x 6 CFM	155	195	230	270	310	345	385	425	465	500	540	620	695	770
Ak .386 Throw	4.5	5.5	6.5	8.0	9.0	10.0	11.0	12.0	14.0	15.0	16.0	18.0	20.0	23.0
20 x 5 CFM	160	200	240	280	320	355	395	435	475	515	555	635	715	795
Ak .397 Throw	5.0	6.0	7.5	8.5	10.0	11.0	12.0	13.0	15.0	16.0	17.0	19.0	22.0	24.0
24 x 5 CFM	190	240	285	335	380	430	480	525	575	620	670	765	860	955
Ak .478 Throw	5.5	6.5	8.0	9.5	11.0	12.0	13.0	15.0	16.0	17.0	19.0	21.0	24.0	27.0
20 x 6 CFM	195	245	290	340	390	435	485	535	585	630	680	780	875	970
Ak .486 Throw	5.5	7.0	8.0	9.5	11.0	12.0	13.0	15.0	16.0	17.0	19.0	22.0	24.0	27.0
24 x 6 CFM	235	295	350	410	470	525	585	645	705	760	820	940	1055	1170
Ak .586 Throw	6.0	7.5	9.0	10.0	12.0	13.0	15.0	16.0	18.0	19.0	21.0	24.0	27.0	29.0
20 x 8 CFM	265	335	400	465	530	600	665	730	800	865	930	1065	1195	1330
Ak .665 Throw	6.5	8.0	9.5	11.0	13.0	14.0	16.0	17.0	19.0	21.0	22.0	25.0	28.0	32.0
30 x 6 CFM	295	370	440	515	590	660	735	810	885	955	1030	1180	1325	1470
Ak .736 Throw	6.5	8.5	10.0	12.0	13.0	15.0	17.0	18.0	20.0	21.0	23.0	27.0	30.0	33.0
24 x 8 CFM	320	400	480	560	640	720	800	880	960	1045	1125	1285	1445	1605
Ak .802 Throw	7.0	8.5	10.0	12.0	14.0	15.0	17.0	19.0	21.0	22.0	24.0	28.0	31.0	35.0
30 x 8 CFM	405	505	605	705	810	910	1010	1110	1210	1315	1415	1615	1820	2025
Ak .1010 Throw	8.0	9.5	12.0	14.0	16.0	17.0	19.0	21.0	23.0	25.0	27.0	31.0	35.0	39.0
24 x 10 CFM	410	510	610	715	815	920	1020	1120	1225	1325	1430	1630	1835	2040
Ak .1020 Throw	8.0	9.5	12.0	14.0	16.0	18.0	19.0	21.0	23.0	25.0	27.0	31.0	35.0	40.0
36 x 8 CFM	485	605	725	845	970	1090	1210	1330	1450	1575	1695	1935	2180	2420
Ak .1210 Throw	8.5	11.0	13.0	15.0	17.0	19.0	21.0	23.0	25.0	28.0	30.0	34.0	38.0	42.0
24 x 12 CFM	495	615	740	860	985	1105	1230	1355	1475	1600	1720	1970	2215	2460
Ak .1230 Throw	8.5	11.0	13.0	15.0	17.0	19.0	21.0	24.0	26.0	28.0	30.0	34.0	39.0	43.0
30 x 10 CFM	510	640	770	900	1025	1150	1280	1410	1535	1665	1790	2050	2305	2560
Ak .1280 Throw	8.5	11.0	13.0	15.0	18.0	20.0	22.0	24.0	26.0	28.0	31.0	35.0	39.0	44.0
36 x 10 CFM	615	770	925	1080	1230	1385	1540	1695	1850	2000	2155	2465	2770	3080
Ak .1540 Throw	9.5	12.0	14.0	17.0	19.0	22.0	24.0	26.0	29.0	31.0	34.0	38.0	43.0	48.0
30 x 12 CFM	620	775	930	1085	1240	1395	1550	1705	1860	2015	2170	2480	2790	3100
Ak .1550 Throw	9.5	12.0	14.0	17.0	19.0	22.0	24.0	26.0	29.0	31.0	34.0	38.0	43.0	48.0
36 x 12 CFM	745	930	1115	1300	1490	1675	1860	2045	2230	2420	2605	2975	3350	3720
Ak .1860 Throw	11.0	13.0	16.0	18.0	21.0	24.0	26.0	29.0	31.0	34.0	37.0	42.0	47.0	52.0

Screw Hole Chart for Extruded Aluminum Line
V Series, H Series, C Series, RH Series

