




HeatLink Group Inc.
Head Office:
4603E - 13th Street NE
Calgary, AB, Canada
T2E 6M3
Toll Free (Canada & USA): 1-800-661-5332
Fax (Canada):1-866-450-1155
Fax (USA):1-800-869-6098
International Phone: +1 (403) 250-3432
International Fax: +1 (403) 250-1155
General Inquiries: info@heatlink.com
Purchase Orders: purchaseorder@heatlink.com
Quotation Requests: quotes@heatlink.com

Item # 13204, 4 Port Single Row, 3/4" PEX × Closed End HPP Multiport Tee

Closed one end and 3/4" or 1" PEX insert on the other end. 1/2" branches in single row or opposing rows. SS press sleeves sold separately.

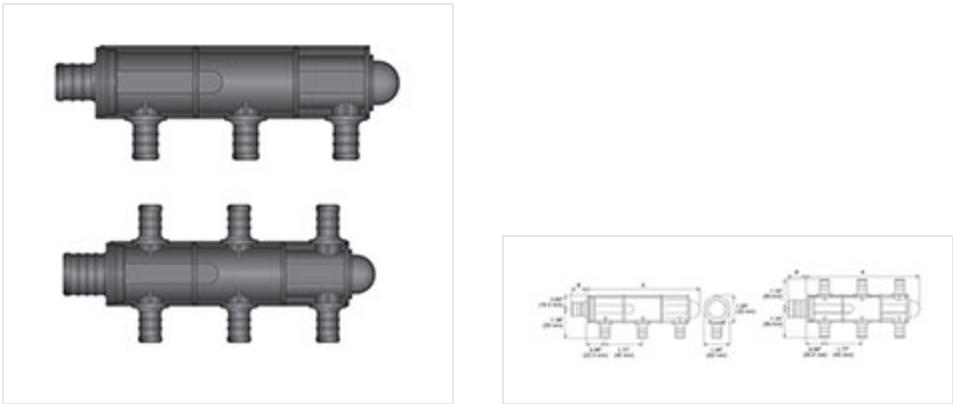

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications	
Number of Ports	4
Inlet	3/4"
Outlet	closed
Length	7.91 in 201 mm
Height	1.38 in 35 mm
Weight	0.067 kg 0.148 lb

Pkg Qty	5
Carton Qty	250
Unit	ea.

Dimensions

A	7.20 in 183 mm
B	0.71 in 18.0 mm
C	0.88 in 22.4 mm
D	1.77 in 45 mm
E	1.26 in 32 mm
F	1.30 in 33 mm
G	0.65 in 16.5 mm
J	1.38 in 35 mm
J1	1.38 in 35 mm

Technical Data

Material	Modified Polyphenylsulfone
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

Listings

cNSFus-pw-G

Codes

—

Codes

IAPMO UPC

Standards

—

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

—

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

—

Related Documents

Potable Water Systems Installation Guide (L3235)
HeatLink Limited Plumbing Warranty