

b or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

High Performance Polymer PEX insert plugs.

Technical Data

Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Dimensional Drawing

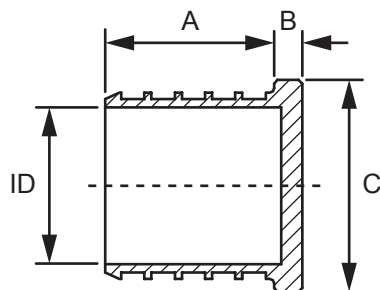

Listings

ICC-ES PMG 1087
cNSFus-pw
cQALus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

Qty	Stk #	Size	Dimension, in / (mm)			ID	Weight, lb / (kg)
			A	B	C		
	15005	½" PEX	0.71 (18.0)	0.13 (3.2)	0.63 (16.0)	0.31 (8.0)	0.005 (0.002)
	15022	¾" PEX	0.71 (18.0)	0.13 (3.2)	0.83 (21.0)	0.46 (11.7)	0.009 (0.004)
	15028	1" PEX	0.85 (21.7)	0.14 (3.5)	0.98 (25.0)	0.61 (15.5)	0.015 (0.007)

This page is intentionally blank.