



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 15022, 3/4" PEX HPP Plug

High Performance Polymer PEX insert plugs. SS press sleeves sold separately.

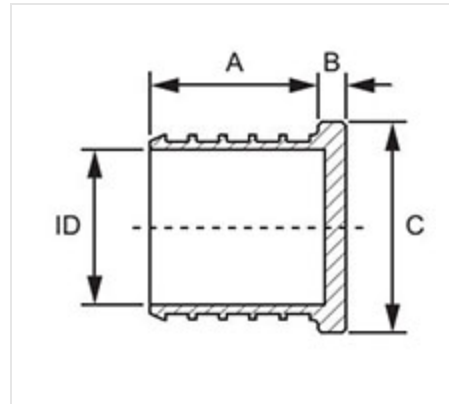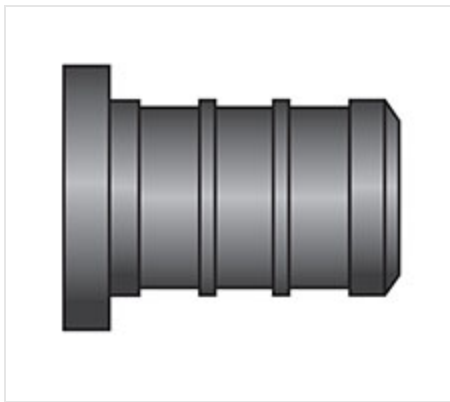

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size 3/4" PEX

Length 0.84 in
21.2 mm

Weight 0.004 kg
0.009 lb

Pkg Qty 25

Carton Qty 1000

Unit ea.

Dimensions

A	0.71 in 18.0 mm
B	0.13 in 3.2 mm
C	0.83 in 21.0 mm
ID	0.46 in 11.7 mm

Technical Data

Material	Modified Polyphenylsulfone
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

Listings	cNSFus-pw
-----------------	-----------

Codes

Codes	IAPMO UPC
--------------	-----------

Standards

Standards	ASTM F877 ASTM F1807 CSA B137.5 NSF/ANSI 14 NSF/ANSI 61 NSF/ANSI 372
------------------	---

Installation

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents



Related Documents

HeatLink Limited Plumbing Warranty