



**HeatLink Group Inc.**

**Head Office:**

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: [info@heatlink.com](mailto:info@heatlink.com)

Purchase Orders: [purchaseorder@heatlink.com](mailto:purchaseorder@heatlink.com)

Quotation Requests: [quotes@heatlink.com](mailto:quotes@heatlink.com)

**Item # 15028, 1" PEX HPP Plug**

High Performance Polymer PEX insert plugs. SS press sleeves sold separately.

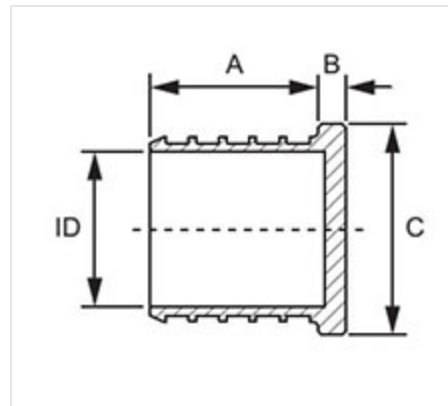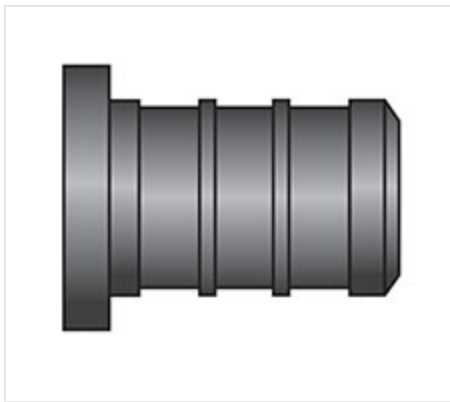

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

**Specifications**

|                   |                      |
|-------------------|----------------------|
| <b>Size</b>       | 1" PEX               |
| <b>Length</b>     | 0.99 in<br>25.2 mm   |
| <b>Weight</b>     | 0.007 kg<br>0.015 lb |
| <b>Pkg Qty</b>    | 5                    |
| <b>Carton Qty</b> | 500                  |
| <b>Unit</b>       | ea.                  |

## Dimensions

|           |                    |
|-----------|--------------------|
| <b>A</b>  | 0.85 in<br>21.7 mm |
| <b>B</b>  | 0.14 in<br>3.5 mm  |
| <b>C</b>  | 0.98 in<br>25.0 mm |
| <b>ID</b> | 0.61 in<br>15.5 mm |

## Technical Data

|                                    |                            |
|------------------------------------|----------------------------|
| <b>Material</b>                    | Modified Polyphenylsulfone |
| <b>Operating Temperature [Max]</b> | 82.2 °C<br>180 °F          |
| <b>Operating Pressure [Max]</b>    | 6.9 bar<br>100 psi         |

## Listings

|                 |           |
|-----------------|-----------|
| <b>Listings</b> | cNSFus-pw |
|-----------------|-----------|

## Codes

|              |           |
|--------------|-----------|
| <b>Codes</b> | IAPMO UPC |
|--------------|-----------|

## Standards

|                  |                                                                                     |
|------------------|-------------------------------------------------------------------------------------|
| <b>Standards</b> | ASTM F877<br>ASTM F1807<br>CSA B137.5<br>NSF/ANSI 14<br>NSF/ANSI 61<br>NSF/ANSI 372 |
|------------------|-------------------------------------------------------------------------------------|

## Installation

**Installation**

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents



**Related Documents**

HeatLink Limited Plumbing Warranty