



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155


General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 16228, 3/4" x 3/4" x 1" PEX HPP Tee

High Performance Polymer PEX insert reducing tees. SS press sleeves sold separately.

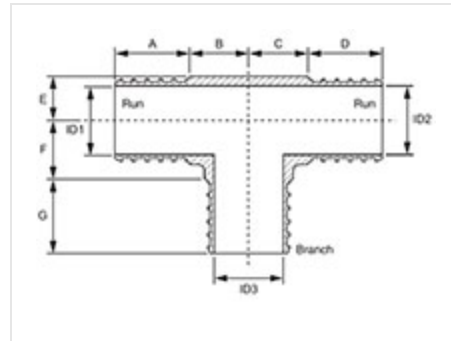

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size (run x run x branch) 3/4" x 3/4" x 1" PEX

Length 1.3 in
33 mm

Length L1 1.3 in
33 mm

Height 1.37 in
35 mm

Weight 0.010 kg
0.023 lb

Pkg Qty 5

Carton Qty 300

Unit

ea.

Dimensions

A

0.71 in
18.0 mm

B

0.59 in
15.0 mm

C

0.59 in
15.0 mm

D

0.71 in
18.0 mm

E

0.33 in
8.5 mm

F

0.52 in
13.3 mm

G

0.85 in
21.7 mm

ID1

0.46 in
11.7 mm

ID2

0.46 in
11.7 mm

ID3

0.61 in
15.5 mm

Technical Data

Material

Modified Polyphenylsulfone

Operating Temperature [Max]

82.2 °C
180 °F

Operating Pressure [Max]

6.9 bar
100 psi

Listings

Listings

cNSFus-pw

Codes

—

Codes

IAPMO UPC

Standards

—

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

—

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

—

Related Documents

HeatLink Limited Plumbing Warranty