



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155


General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 16252, 3/4" x 1/2" x 3/4" PEX HPP Tee

High Performance Polymer PEX insert reducing tees. SS press sleeves sold separately.

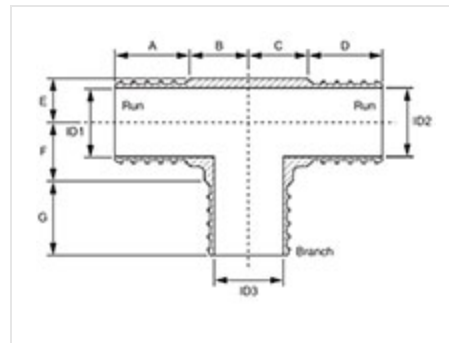

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size (run x run x branch) 3/4" x 1/2" x 3/4" PEX

Length 1.26 in
32 mm

Length L1 1.16 in
32 mm

Height 1.26 in
32 mm

Weight 0.011 kg
0.025 lb

Pkg Qty 25

Carton Qty 250

Unit

ea.

Dimensions

A

0.71 in
18.0 mm

B

0.45 in
14.0 mm

C

0.55 in
14.0 mm

D

0.71 in
18.0 mm

E

0.33 in
8.5 mm

F

0.55 in
14.0 mm

G

0.71 in
18.0 mm

ID1

0.46 in
11.7 mm

ID2

0.31 in
8.0 mm

ID3

0.46 in
11.7 mm

Technical Data

Material

Modified Polyphenylsulfone

Operating Temperature [Max]

82.2 °C
180 °F

Operating Pressure [Max]

6.9 bar
100 psi

Listings

Listings

cNSFus-pw

Codes

—

Codes

IAPMO UPC

Standards

—

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

—

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

—

Related Documents

HeatLink Limited Plumbing Warranty