



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155


General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 16888, 1" x 1" x 1" PEX HPP Tee

High Performance Polymer PEX insert tees. SS press sleeves sold separately.

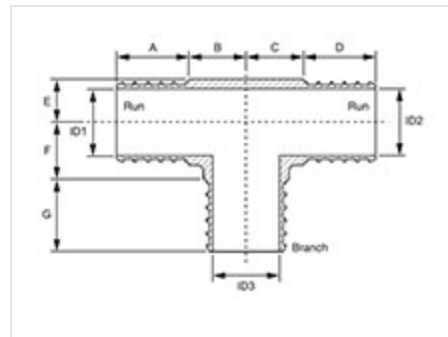

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size (run x run x branch) 1" x 1" x 1" PEX

Length 1.52 in
23.41 mm

Length L1 1.52 in
38.8 mm

Pkg Qty 1.52 in
38.8 mm

Weight 0.060 kg
0.060 lb

Units Per Package 10

Carton Qty 100

Unit	ea.
------	-----

Dimensions		—
A	0.85 in 21.7 mm	
B	0.67 in 17.1 mm	
C	0.67 in 1.71 mm	
D	0.85 in 21.7 mm	
E	0.47 in 12.0 mm	
F	0.67 in 17.1 mm	
G	0.85 in 21.7 mm	
ID1	0.61 in 15.5 mm	
ID2	0.61 in 15.5 mm	
ID3	0.61 in 15.5 mm	

Technical Data		—
Material	Modified Polyphenylsulfone	
Operating Temperature [Max]	82.2 °C 180 °F	
Operating Pressure [Max]	6.9 bar 100 psi	

Listings	—

Listings

cNSFus-pw

Codes

—

Codes

IAPMO UPC

Standards

—

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

—

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

—

Related Documents

HeatLink Limited Plumbing Warranty