

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX Insert × MNPT adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Technical Data


Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Qty	Stk #	Size	Dimension		C	ID	Weight
			A	B			
	17505	1/2" PEX × 1/2" MNPT	1.69" (43.0 mm)	0.86" (22.0 mm)	1/2" MNPT	0.315" (8 mm)	7.5 g (0.26 oz)
	17552	1/2" PEX × 3/4" MNPT	1.71" (43.6 mm)	1.0" (25.4 mm)	3/4" MNPT	0.315" (8 mm)	8.7 g (0.30 oz)
	17522	3/4" PEX × 3/4" MNPT	1.71" (43.6 mm)	1.0" (25.4 mm)	3/4" MNPT	0.46" (11.6 mm)	9.9 g (0.34 oz)
	17525	3/4" PEX × 1/2" MNPT	1.69" (43.0 mm)	1.0" (25.4 mm)	1/2" MNPT	0.46" (11.6 mm)	10.3 g (0.36 oz)

Dimension Diagram

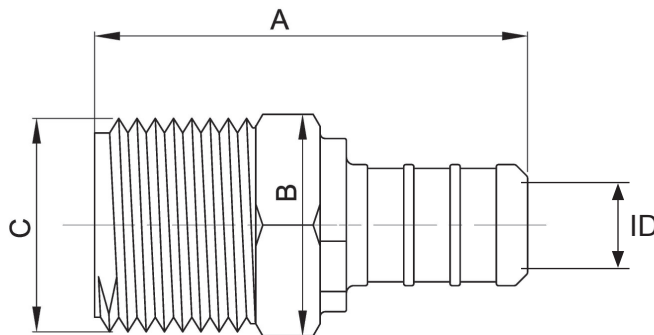

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty.

This page is intentionally blank.