



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 17522, 3/4" PEX × 3/4" MNPT HPP Adapter

High Performance Polymer PEX insert × MNPT adapters. SS press sleeves sold separately.

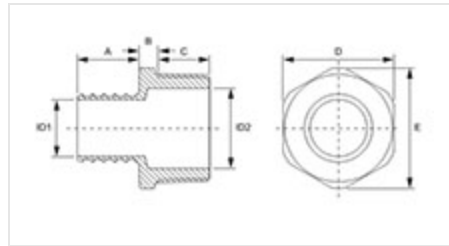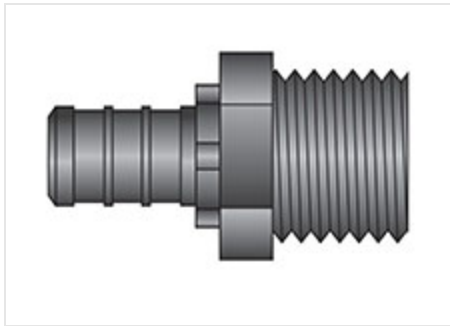

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size	3/4" PEX × 3/4" MNPT
Length	1.72 in 43.6 mm
Weight	0.009 kg 0.022 lb
Pkg Qty	25
Carton Qty	300
Unit	ea.

Dimensions

A	0.70 in 17.8 mm
B	0.39 in 9.8 mm
C	0.63 in 16.0 mm
D	1.06 in 26.8 mm
E	1.22 in 31.0 mm
ID1	0.46 in 11.7 mm
ID2	0.76 in 19.2 mm

Technical Data

—

Material	No Lead (Eco) Brass - C69300
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

—

Listings	cNSFus-pw
----------	-----------

Codes

—

Codes	IAPMO UPC
-------	-----------

Standards

—

Standards	ASTM F877 ASTM F2159 CSA B137.5 NSF/ANSI 14
-----------	--

NSF/ANSI 61
NSF/ANSI 372

Installation



Installation

Installation must follow all of HeatLink’s instructions and guidelines.

Related Documents



Related Documents

HeatLink Limited Plumbing Warranty